
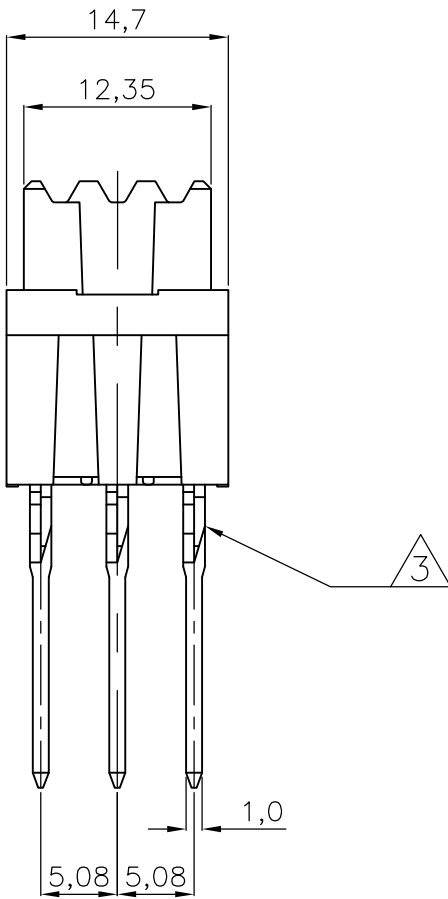
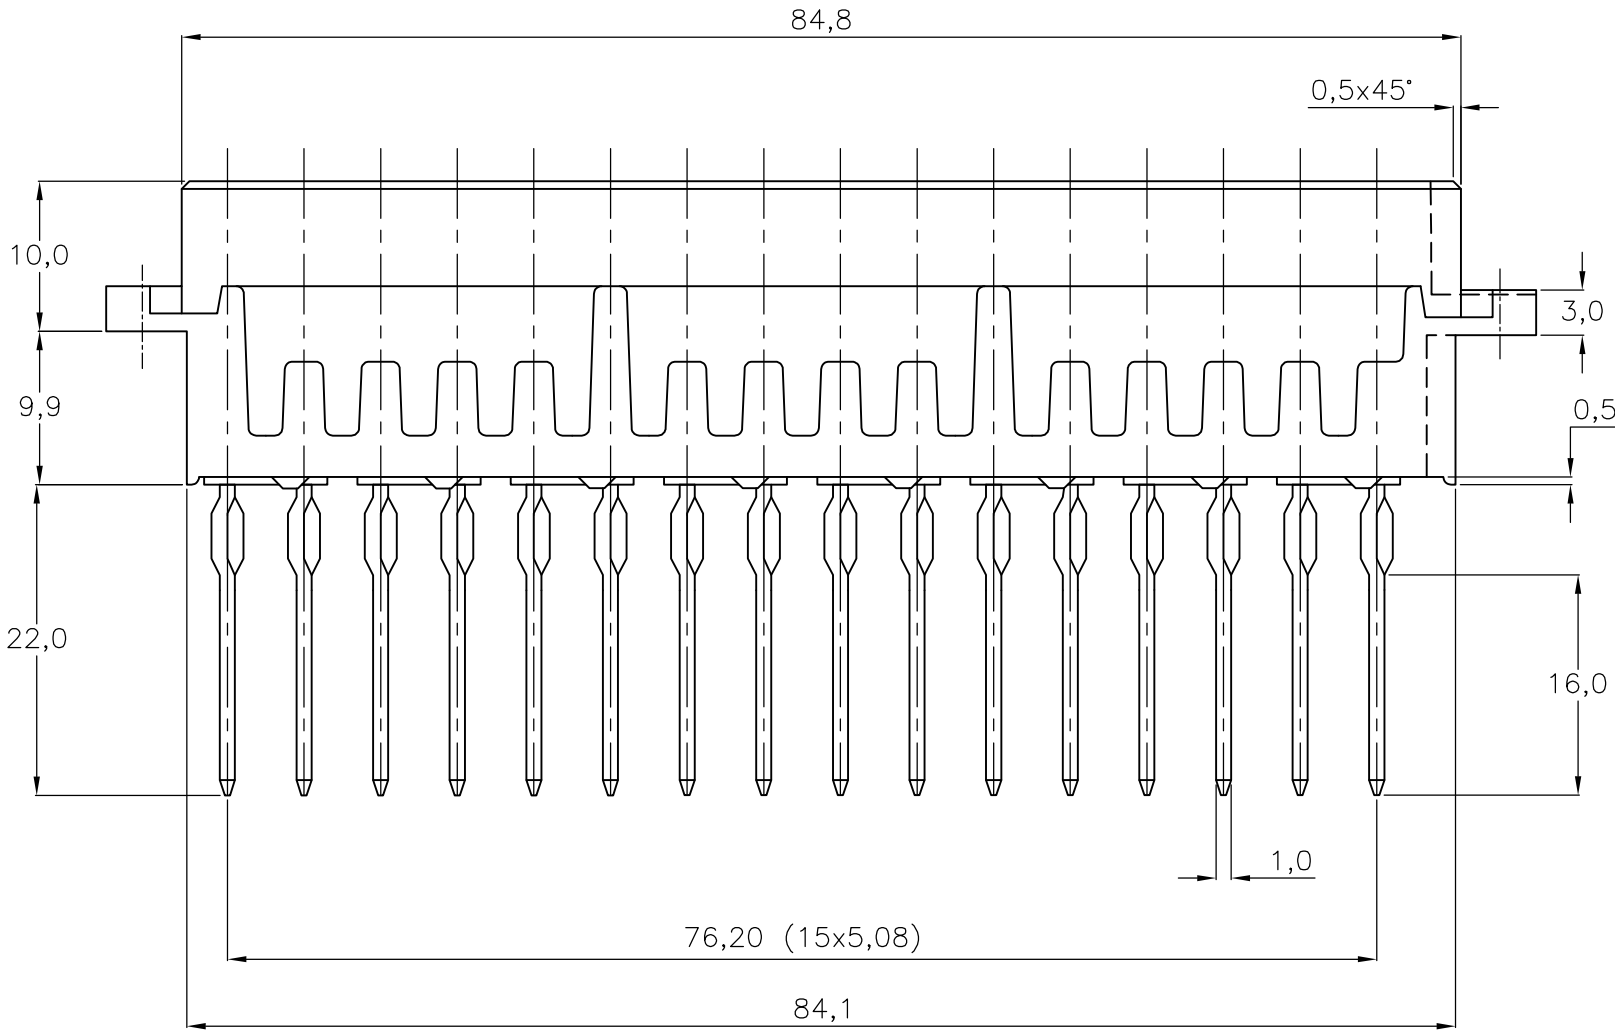


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
H	—	G		EH-1256-96	01-07-97	J.G —
		H		ECR-07-020965	22-08-08	AEG MKO

NOTES:

- 1 MATERIAL:
—HOUSING: G.F. THERMOPL. POLYESTER 94-V0.
COLOUR: GREY
—CONTACTS: PHOSHORBRONZE
- 2 PLATING CONTACT:
—1: 1,25µm Au OVER 1,25µm Ni AT CONTACT AREA,
REMAINDER 2,0µm Sn OVER 1,25µm Ni.
—4: SAME AS -1 ONLY 0,8µm Au AT CONTACT AREA.
—7: SAME AS -1 ONLY 2,0µm Au AT CONTACT AREA.
—8: SAME AS -1 ONLY 0,4µm Au AT CONTACT AREA.
- 3 FOR P.C.B.-THICKNESS 2,4-3,2.

P.C.B. HOLE DIM. ACTION PIN	
DRILLED HOLE	: 1,75 ± 0,025 mm
FIN. HOLE	: 1,54 to 1,69 mm
AFTER REFLOW	: 1,51 to 1,69 mm
Cu-thks	: 0,025 to 0,075 mm
SnPb-thks	: 0,004 to 0,010 mm

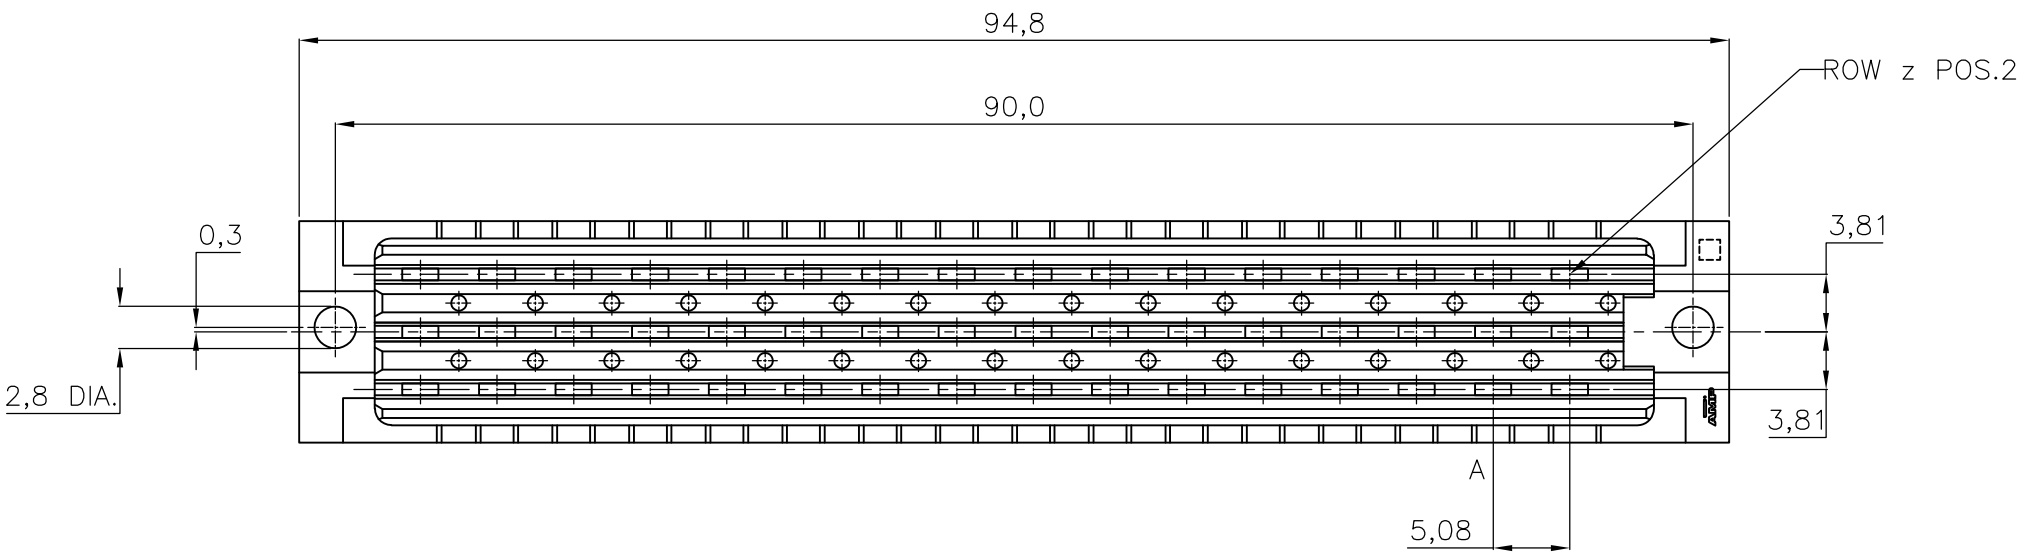

ROW	32	30	28	26	24	22	20	18	16	14	12	10	8	6	4	2
z b d	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
POS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

AN ASTERISK „X” DENOTES A CONTACT.

OBSOLETE	SEE NOTE	SEE NOTE	166555-8
			166555-7
OBSOLETE	2	1	166555-4
			166555-1
FINISH		MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.V.LIEMPT CHK J.GIBBELS		18JAN91 07JUL97		Tyco Electronics Corporation 's-Hertogenbosch, Nederland													
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —		NAME													
		0 PLC ± —		PRODUCT SPEC		3x16 POS. TYPE F FEMALE W.W. ACTION-PIN CONNECTOR PER DIN 41612													
		1 PLC ± —		—															
		2 PLC ± —		—															
		3 PLC ± —		—															
4 PLC ± —		APPLICATION SPEC		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO							
MATERIAL		FINISH		WEIGHT		A2		00779		C=166555		—							
—		—		—		CUSTOMER DRAWING		SCALE		NTS		SHEET		1 of 1		REV		H	