


Through-hole mounting Rotary DIP Switches

- Top/Side-actuated, and Flat/Extended-actuator models available.
- Actuator with an O-ring sealed structure prevents the ingress of dirt and dust.
- Two different terminal arrangements allow the flexibility of circuit design.

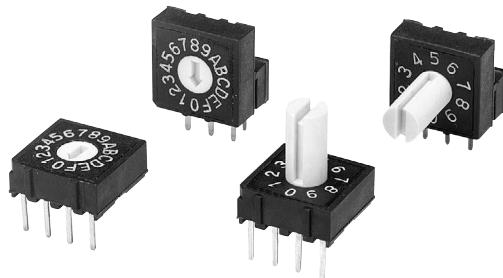

RoHS Compliant

■List of Models

Type (actuator color)			Top-actuated, flat (white)	Top-actuated, extended actuator (white)	Side-actuated, flat (white)	Side-actuated, extended actuator (white)
Number of positions	Quantity per tube	Terminal arrangement	Output code			
10	48	4 x 1	BCD Decimal	A6R-101RF	A6R-101RS	A6RV-101RF
		3 x 3		A6R-102RF	A6R-102RS	A6RV-102RF
16	48	4 x 1	BCD Hexadecimal	A6R-161RF	A6R-161RS	A6RV-161RF
		3 x 3		A6R-162RF	A6R-162RS	A6RV-162RF
						A6RV-162RS

Note: Order in multiples of the package quantity.

■Ratings/Characteristics

Ratings		25 mA at 24 VDC, 10 μ A (minimum current) at 3.5 VDC
Ambient operating temperature		-25 to +80°C 60%RH max. (with no icing or condensation)
Ambient operating humidity		35% to 95% (at +5 to +35°C)
Insulation resistance		100 M Ω min. (at 250 VDC)
Contact resistance		200 m Ω max. (initial value)
Dielectric strength	Between terminals	250 VAC for 1 min
Vibration resistance	Malfunction	10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Malfunction	300 m/s ² min.
Durability	Electrical	5,000 steps min.
Operating torque		1.96 \times 10 ⁻² N·m {2 gf·m} max.
Weight		Top-actuated: Approx. 0.6 g Side-actuated: Approx. 0.8 g (Add 0.13 g for the extended-actuator type of each model.)

■Output Codes

10-position Models

Position	BCD Decimal code			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

16-position Models

Position	BCD Hexadecimal code			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●
A		●		
B	●	●		
C			●	●
D	●		●	●
E		●	●	●
F	●	●	●	●


Note: "●" indicates that the internal switch is ON.

■Dimensions (Unit: mm)


● Top-actuated Flat Models with 4x1 Terminal Arrangement

A6R-101RF



A6R-161RF



A6R-161RF



A6R-101RF

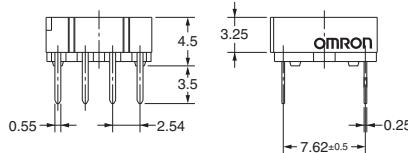


A6R-101RF


● Top-actuated Extended-actuator Models with 4x1 Terminal Arrangement

A6R-101RS



A6R-161RS



A6R-161RS




A6R-101RS

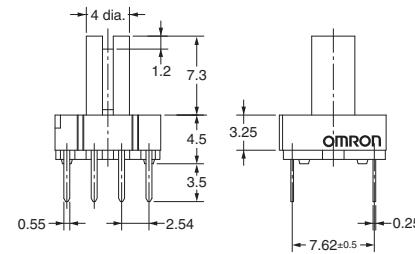


● Top-actuated Flat Models with 3x3 Terminal Arrangement

A6R-102RF



A6R-162RF



A6R-162RF



A6R-102RF

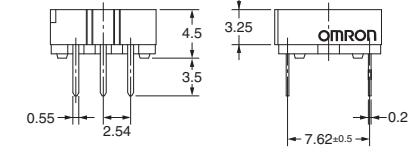


A6R-102RF

● Top-actuated Extended-actuator Models with 3x3 Terminal Arrangement



A6R-102RS

A6R-162RS



A6R-162RS



A6R-102RS

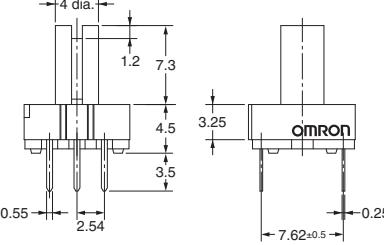


● Side-actuated Flat Models with 4x1 Terminal Arrangement

A6RV-101RF


A6RV-161RF



A6RV-161RF







A6RV-101RF

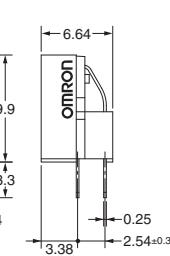

● Side-actuated Extended-actuator Models with 4x1 Terminal Arrangement

A6RV-101RS

A6RV-161RS




A6RV-161RS

A6RV-101RS

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.


● Side-actuated Flat Models with 3×3 Terminal Arrangement

A6RV-102RF
A6RV-162RF

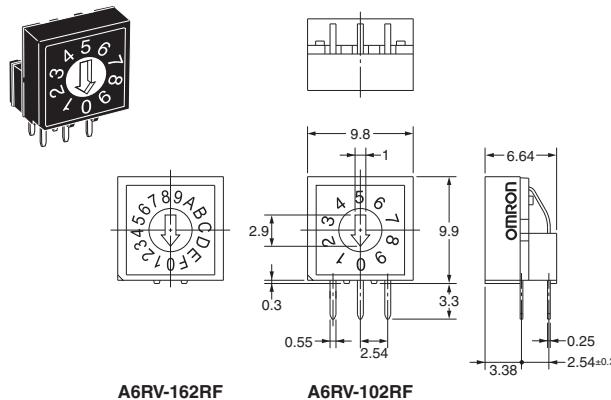

● Side-actuated Extended-actuator Models with 3×3 Terminal Arrangement


A6RV-102RS
A6RV-162RS

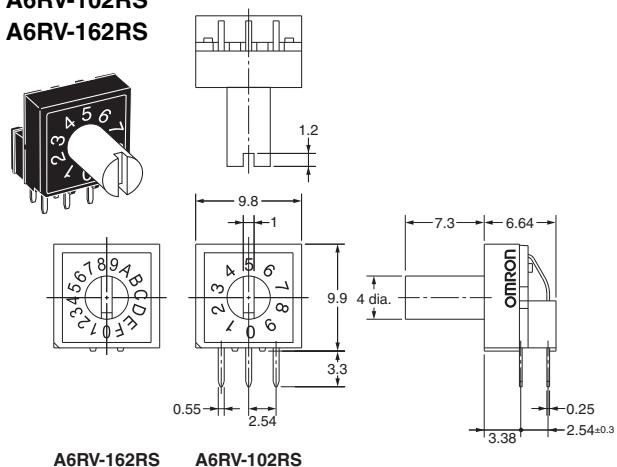


■PCB Dimensions

● Top-actuated Models

4×1 Terminal Arrangement

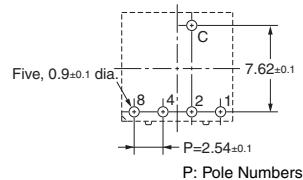


3×3 Terminal Arrangement

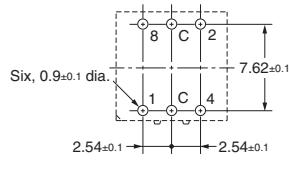


● Side-actuated Models

4×1 Terminal Arrangement



3×3 Terminal Arrangement




Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

■Internal Connections


Contact Form (Top View)

● Top-actuated Models

4×1 Terminal Arrangement




3×3 Terminal Arrangement




● Side-actuated Models

4×1 Terminal Arrangement



3×3 Terminal Arrangement



■Precautions

Be sure to read the Safety precautions common to all DIP Switches for correct use.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. A212-E1-01
0812(0207)(O)