


High Frequency Wire Wound Transformers

EP13Plus Platforms - SMT PA3855/56.XXXNLT



- Ⓢ Industry standard footprint, 30% more power handling
- Ⓢ **Power Range:** Up to 70W
- Ⓢ **Height:** 14.0mm Max
- Ⓢ **Footprint:** 17.7mm x 14.5mm Max
- Ⓢ **Topology:** Forward and Flyback

| Part Number | Electrical Specifications @25°C – Operating Temperature -40°C to 130°C ¹ | | | Schematic | |
|--------------|---|------------------------------------|--------------|----------------------------|--------|
| PA3855.001NL | Pri. Inductance | (1-3) | 54uH +/- 10% | <p>Flyback Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.67uH Max | | |
| | DCR | (1-3) | 62 | | mΩ Max |
| | | (9-6) | 6.5 | | |
| | | (10-7) | 6.5 | | |
| | | (4-5) | 120 | | |
| Hi-Pot | Pri-Sec | 2250 | Vdc | | |
| K1 Factor | 1125.0 | | | | |
| PA3855.002NL | Pri. Inductance | (1-3) | 48uH +/- 10% | <p>Flyback Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.67uH Max | | |
| | DCR | (1-3) | 62 | | mΩ Max |
| | | (9-6) | 10 | | |
| | | (10-7) | 10 | | |
| | | (4-5) | 120 | | |
| Hi-Pot | Pri-Sec | 2250 | Vdc | | |
| K1 Factor | 1000.0 | | | | |
| PA3855.003NL | Pri. Inductance | (1-3) | 41uH +/- 10% | <p>Flyback Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.67uH Max | | |
| | DCR | (1-3) | 62 | | mΩ Max |
| | | (9-6) | 20 | | |
| | | (10-7) | 23 | | |
| | | (4-5) | 120 | | |
| Hi-Pot | Pri-Sec | 2250 | Vdc | | |
| K1 Factor | 854.2 | | | | |
| PA3855.004NL | Pri. Inductance | (1-3) | 21uH +/- 10% | <p>Flyback Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.3uH Max | | |
| | DCR | (1-3) | 31 | | mΩ Max |
| | | (9-6) | 10 | | |
| | | (10-7) | 10 | | |
| | | (4-5) | 180 | | |
| Hi-Pot | Pri-Sec | 2250 | Vdc | | |
| K1 Factor | 538.5 | | | | |

High Frequency Wire Wound Transformers

EP13Plus Platforms - SMT PA3855/56.XXXNL



| Part Number | Electrical Specifications @25°C – Operating Temperature -40°C to 130°C ¹ | | | Schematic | |
|--------------|---|------------------------------------|----------------|----------------------------|--------|
| PA3855.005NL | Pri. Inductance | (1-3) | 21uH +/- 10% | <p>Flyback Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.3uH Max | | |
| | DCR | (1-3) | 31 | | mΩ Max |
| | | (9-6) | 14 | | |
| | | (10-7) | 14 | | |
| | | (4-5) | 180 | | |
| | Hi-Pot | Pri-Sec | 2250 | | Vdc |
| K1 Factor | 583.3 | | | | |
| PA3855.006NL | Pri. Inductance | (1-3) | 21uH +/- 10% | <p>Flyback Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.3uH Max | | |
| | DCR | (1-3) | 31 | | mΩ Max |
| | | (9-6) | 58 | | |
| | | (10-7) | 58 | | |
| | | (4-5) | 180 | | |
| | Hi-Pot | Pri-Sec | 2250 | | Vdc |
| K1 Factor | 583.3 | | | | |
| PA3855.008NL | Pri. Inductance | (6-9) | 2.5uH +/- 10% | <p>Flyback Transformer</p> | |
| | Lk. Inductance | (6-9) w/ (1,2,3,5) shorted | 0.2uH Max | | |
| | DCR | (1-2) | 80 | | mΩ Max |
| | | (3-5) | 100 | | |
| | | (6,7-9,10) | 9 | | |
| | Hi-Pot | Pri-Sec | 2250 | | Vdc |
| K1 Factor | 208.3 | | | | |
| PA3856.001NL | Pri. Inductance | (1-3) | 100 uH +/- 15% | <p>Forward Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.4uH Max | | |
| | DCR | (1-3) | 29.4 | | mΩ Max |
| | | (9-6) | 6.5 | | |
| | | (10-7) | 6.5 | | |
| | | (4-5) | 120 | | |
| Hi-Pot | Pri-Sec | 2250 | Vdc | | |
| K1 Factor | 27.8 | | | | |
| PA3856.002N | Pri. Inductance | (1-3) | 100uH +/- 15% | <p>Forward Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.4uH Max | | |
| | DCR | (1-3) | 29.4 | | mΩ Max |
| | | (9-6) | 10 | | |
| | | (10-7) | 10 | | |
| | | (4-5) | 120 | | |
| Hi-Pot | Pri-Sec | 2250 | Vdc | | |
| K1 Factor | 27.8 | | | | |

High Frequency Wire Wound Transformers

EP13Plus Platforms - SMT PA3855/56.XXXNL



| Part Number | Electrical Specifications @25°C – Operating Temperature -40°C to 130°C ¹ | | | Schematic | |
|--------------|---|------------------------------------|---------------|----------------------------|--------|
| PA3856.003NL | Pri. Inductance | (1-3) | 100uH +/- 15% | <p>Forward Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.4uH Max | | |
| | DCR | (1-3) | 29.4 | | mΩ Max |
| | | (9-6) | 31.6 | | |
| | | (10-7) | 36 | | |
| | | (4-5) | 120 | | |
| | Hi-Pot | Pri-Sec | 2250 | | Vdc |
| K1 Factor | 27.8 | | | | |
| PA3856.004NL | Pri. Inductance | (1-3) | 128uH +/- 25% | <p>Forward Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.15uH Max | | |
| | DCR | (1-3) | 17.6 | | mΩ Max |
| | | (9-6) | 14.4 | | |
| | | (10-7) | 17 | | |
| | | (4-5) | 410 | | |
| | Hi-Pot | Pri-Sec | 2250 | | Vdc |
| K1 Factor | 41.7 | | | | |
| PA3856.005NL | Pri. Inductance | (1-3) | 128uH +/- 15% | <p>Forward Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.15uH Max | | |
| | DCR | (1-3) | 17.6 | | mΩ Max |
| | | (9-6) | 31.6 | | |
| | | (10-7) | 36 | | |
| | | (4-5) | 410 | | |
| | Hi-Pot | Pri-Sec | 2250 | | Vdc |
| K1 Factor | 41.7 | | | | |
| PA3856.006NL | Pri. Inductance | (1-3) | 128uH +/- 15% | <p>Forward Transformer</p> | |
| | Lk. Inductance | (1-3) w/ (10,9,6,7,4,5) shorted | 0.15uH Max | | |
| | DCR | (1-3) | 17.6 | | mΩ Max |
| | | (9-6) | 105.6 | | |
| | | (10-7) | 122 | | |
| | | (4-5) | 426 | | |
| | Hi-Pot | Pri-Sec | 2250 | | Vdc |
| K1 Factor | 41.7 | | | | |
| PA3856.007NL | Pri. Inductance | (1-2) | 200uH +/- 25% | <p>Forward Transformer</p> | |
| | Lk. Inductance | (1-2) w/ (7,8,9,10) shorted | 0.36uH Max | | |
| | DCR | (1-2) | 60 | | mΩ Max |
| | | (3-4) | 75 | | |
| | | (8-7) | 90 | | |
| | | (10-9) | 90 | | |
| | Hi-Pot | Pri-Sec | 2250 | | Vdc |
| K1 Factor | 33.3 | | | | |

High Frequency Wire Wound Transformers

EP13Plus Platforms - SMT PA3855/56.XXXNLT



Notes:


1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700 Gauss. To calculate the peak flux density use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk}(A)$$
3. In high volt- μ sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 3.84E-14 * (Freq_kHz)^{1.65} * (\Delta B_Gauss)^{2.65}$$
 where ΔB can be calculated as:
 For Flyback Topology: $\Delta B = K1_Factor * \Delta I(A)$
 For Forward Topology: $\Delta B = K1_Factor * Volt\text{-}\mu\text{sec}$
4. The standard pin-numbering for this package is indicated in the below mechanical drawing showing pin 1 on the lower right corner and the numbers proceeding clockwise to pin 10 on the upper right corner.
5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA2160.001NL becomes PA2160.001NLT). Pulse complies with industry standard tape and reel specification EIA481.

Mechanical

PM2160.XXXNL

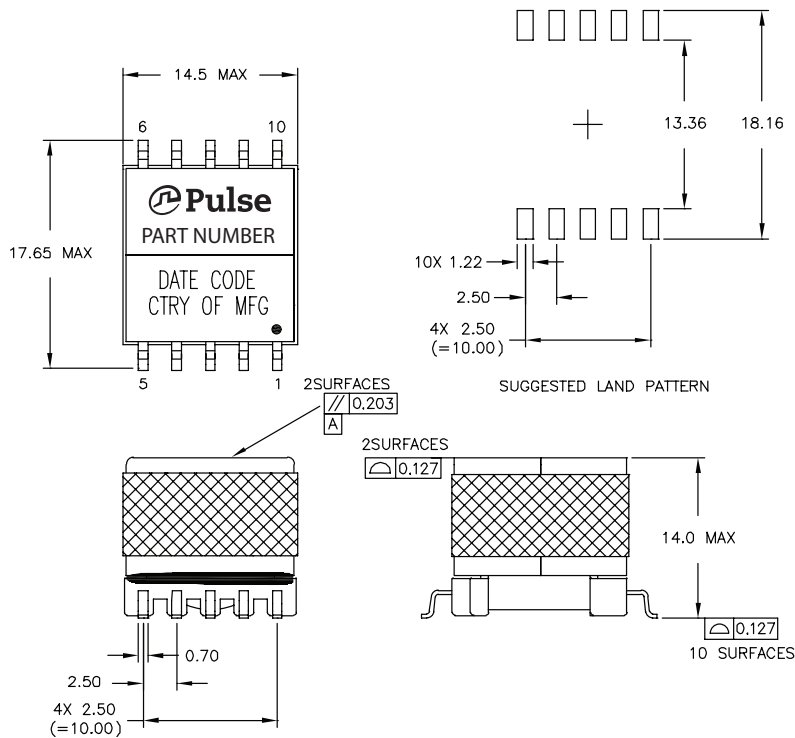


High Frequency Wire Wound Transformers

EP13Plus Platforms - SMT PA3855/56.XXXNLT



TAPE & REEL INFO

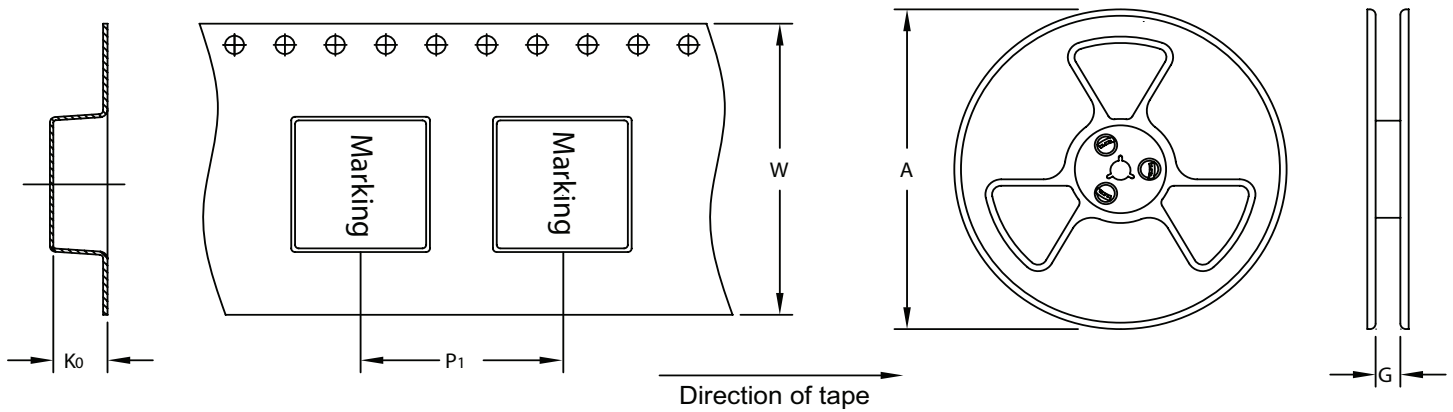

SURFACE MOUNTING TYPE, REEL/TAPE LIST

| PART NUMBER | REEL SIZE (mm) | | TAPE SIZE (mm) | | | QTY PCS/REEL |
|------------------|----------------|------|----------------|----|----------------|-----------------|
| | A | G | P ₁ | W | K ₀ | |
| PA3855/56.XXXNLT | Ø330 | 32.4 | 24 | 32 | 13.2 | 130 |

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen,
P.R. China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

3 Fraser Street
0428 DUO Tower
Singapore 189352

Pulse North Asia

1F., No.111 Xiyuan Rd
Zhongli City
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. Pulse Electronics, Inc. All rights reserved.