

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS


REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	9/11/04	

- DO-IT-YOURSELF (DIY) Ø4mm RETRACTABLE SHEATH BANANA PLUG, SCREW ATTACHMENT
- SPECIFICATIONS:
INSULATOR BODY: POLYAMIDE (NYLONE)
PLUG BODY: BRASS, NICKEL PLATED
SPRING: SPRING STEEL
CONTACT SPRING: BECU, NICKEL PLATED
- RATING:
VOLTAGE: 600V CATII P2 (per INSTRUCTIONS)
REINFORCED INSULATION, CE MARK
CURRENT: 36A MAX.
INTERNAL RESISTANCE: <10mΩ
TEMPERATURE: -20° TO +80° C.
- MAXIMUM WIRE SIZES:
CONDUCTOR: Ø.090 (12AWG)
INSULATION: Ø.16 (Ø4.0)
STRIP LENGTH: .25 (6.4)

PART NUMBER


CT3201-#

COLOR: 0 — BLACK
2 — RED
4 — YELLOW
5 — GREEN
6 — BLUE
9 — WHITE

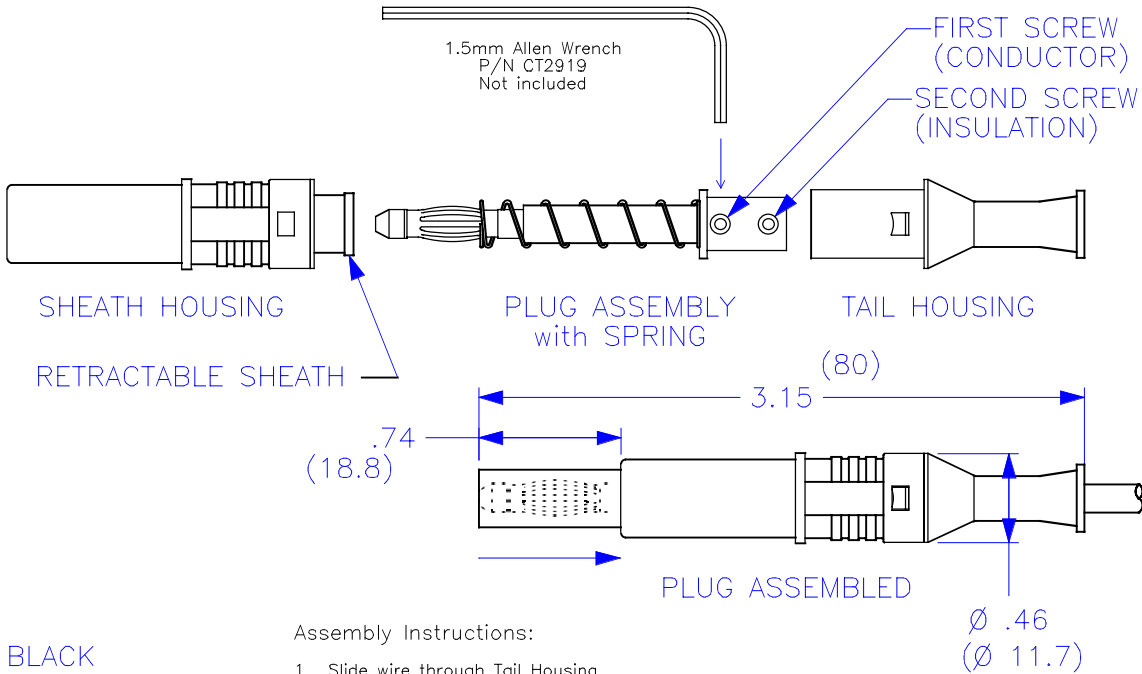

Assembly Instructions:

- Slide wire through Tail Housing.
- Strip wire .25" (6.4mm).
- Insert stripped wire into Plug Assembly and tighten First Set-Screw (conductor). Set-Screws use 1.5mm Allen Wrench (Cal Test P/N CT2919).
- Snug Second Set-Screw on wire insulation.
- Push Plug Assembly with Spring into Tail Housing.
- Slip Retractable Sheath onto end of Plug Assembly.
- Snap Tail Housing assembly into Sheath Housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ±.005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics				22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610						
			APPROVALS		DATE		TITLE DIY RETRACTABLE SHEATH PLUG, SCREW ATTACHMENT								
			DRAWN WDH		9/10/04										
			MATERIAL	CHECKED				SIZE A		CAGE CODE		DWG. NO. P320100		REV. —	
			FINISH	ENGR.											
NEXT ASSY	USED ON			DESIGN ACTIVITY											
APPLICATION							SCALE 1:1				SHEET 1 OF 1				