

# High Frequency Quadrature Hybrid, 1 - 2 GHz

Rev. V3

#### **Features**

Octave Bandwidth

Low VSWR: 1.25:1 Typical

• Miniature Size: 1/2" x 3/8" Flatpack

• Impedance: 50 Ohms Nominal

• Input Power: 25 Watts Max @ +25°C, Derated to

1 Watt @ +85°C

MIL-STD-202 Screening Available


## **Description**

3 dB Hybrids are ideal for dividing a signal into two signals of equal amplitude and a constant 90° or 180° phase differential and for Quadrature combining or performing summation/differential combining.

## **Phasing Diagram**

) N N	A	В	С	D
А	$\times$	ISO	-90°	0°
В	ISO	$\times$	0°	-90°
С	-90°	0°	$\times$	ISO
D	0°	-90°	ISO	$\times$

#### FP-2

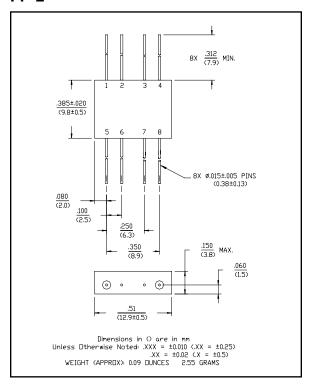

## **Pin Configuration**

Pin No.	Function	Pin No.	Function
1	Α	5	D
2	GND	6	GND
3	GND	7	GND
4	В	8	С

# Electrical Specifications<sup>1</sup>: $T_A = -55$ °C to +85°C

Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Insertion Loss <sup>2</sup>	Less Coupling	1- 2 GHz	dB	_	_	0.3
Isolation	_	1- 2 GHz	dB	18	_	_
Amplitude Balance	_	1- 2 GHz	dB	_	_	1.0
VSWR	_	1- 2 GHz	Ratio	_	_	1.5:1
Deviation from Quadrature	_	1- 2 GHz	0	_	_	5

- 1. All specifications apply with 50 ohm source and load impedance.
- 2. Average of coupled output less 3 dB.

This product contains elements protected by United States Patent Number 3,484,724.

<sup>•</sup> North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400


<sup>•</sup> India Tel: +91.80.4155721




High Frequency Quadrature Hybrid, 1 - 2 GHz

Rev. V3

## **Typical Performance Curves**

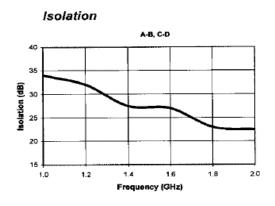


#### Deviation from Quadrature

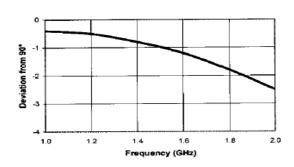


# 1.20 1.00 1.00 12 1.4 1.5 1.8 2.0 Frequency (GHz)

#### Transmission Phase

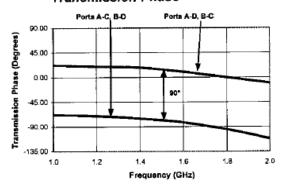

### Coupling

Commitment to produce in volume is not guaranteed.

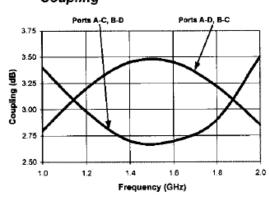

# **Ordering Information**

Part Number	Package
JH-141 PIN	FP-2

India Tel: +91.80.4155721
China Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.