

SAFETY ORGANIZATION(S):

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

- UL 1283
- CSA 22.2, NO.0.0.4.8
- VDE 565-3

OPERATING SPECIFICATIONS:

LINE VOLTAGE/CURRENT:

- 3 AMP., 120/250 VAC
- 3 AMP./40°C, 250 VAC
- 50-60Hz
- 30°C

LINE FREQUENCY:

MAX. CASE RISE θ RATED CURRENT:

MAX. LEAKAGE CURRENT, EACH

LINE TO GROUND

OPERATING AMBIENT TEMP. RANGE:

IN AN AMBIENT, T_a , HIGHER THAN 40°C, THE MAXIMUM OPERATING

CURRENT, I_o , IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{85-T_a}{45}}$$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE:

HUMIDITY:

CURRENT OVERLOAD TEST:

TEST SPECIFICATIONS:

INDUCTANCE:

CAPACITANCE: (MEASURED θ 1 KHz, 0.25 VAC MAX., 25°C $\pm$ 1°C)

LINE TO GROUND:

LINE TO LINE:

DISCHARGE RESISTOR

LINE/GROUND AND LINE/LINE

INSULATION RESISTANCE

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINES TO GROUND:



LINE TO LINE:

FILTER APPROVAL:


THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING

TO TEST THE UNIT IN YOUR EQUIPMENT.

.188 $\pm$.01 DIA

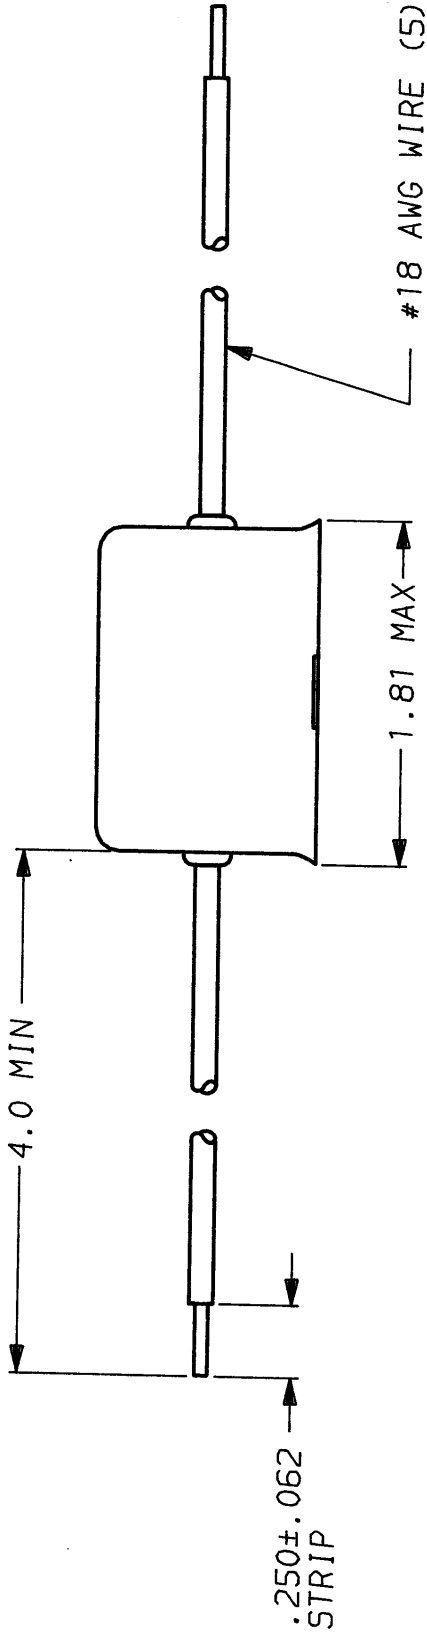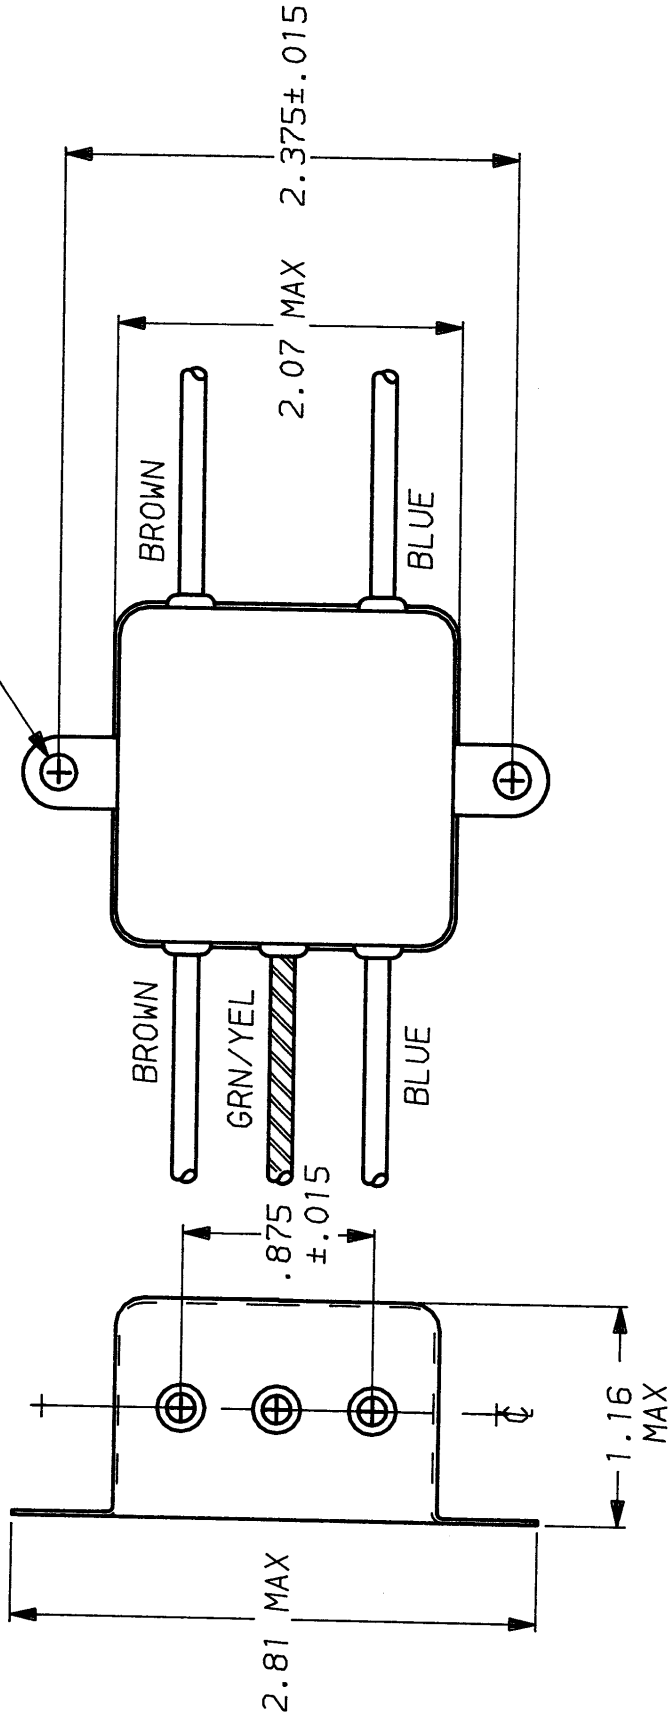

#18 AWG WIRE (5)

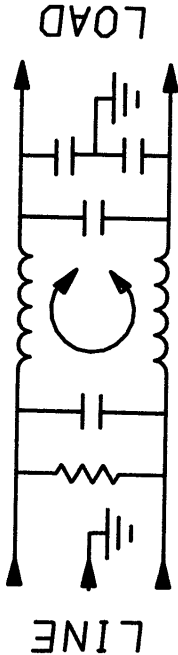

50 Ω - 50 Ω (MINIMUM) INSERTION LOSS

FREQUENCY MHz	.15	.3	.5	1	2	5	10	20	30
COMMON dB	23	30	36	43	45	55	56	56	56
DIFF. dB	2	2	32	52	63	63	58	46	46

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH: $\pm$.025

METRIC: $\pm$

MATERIAL: