



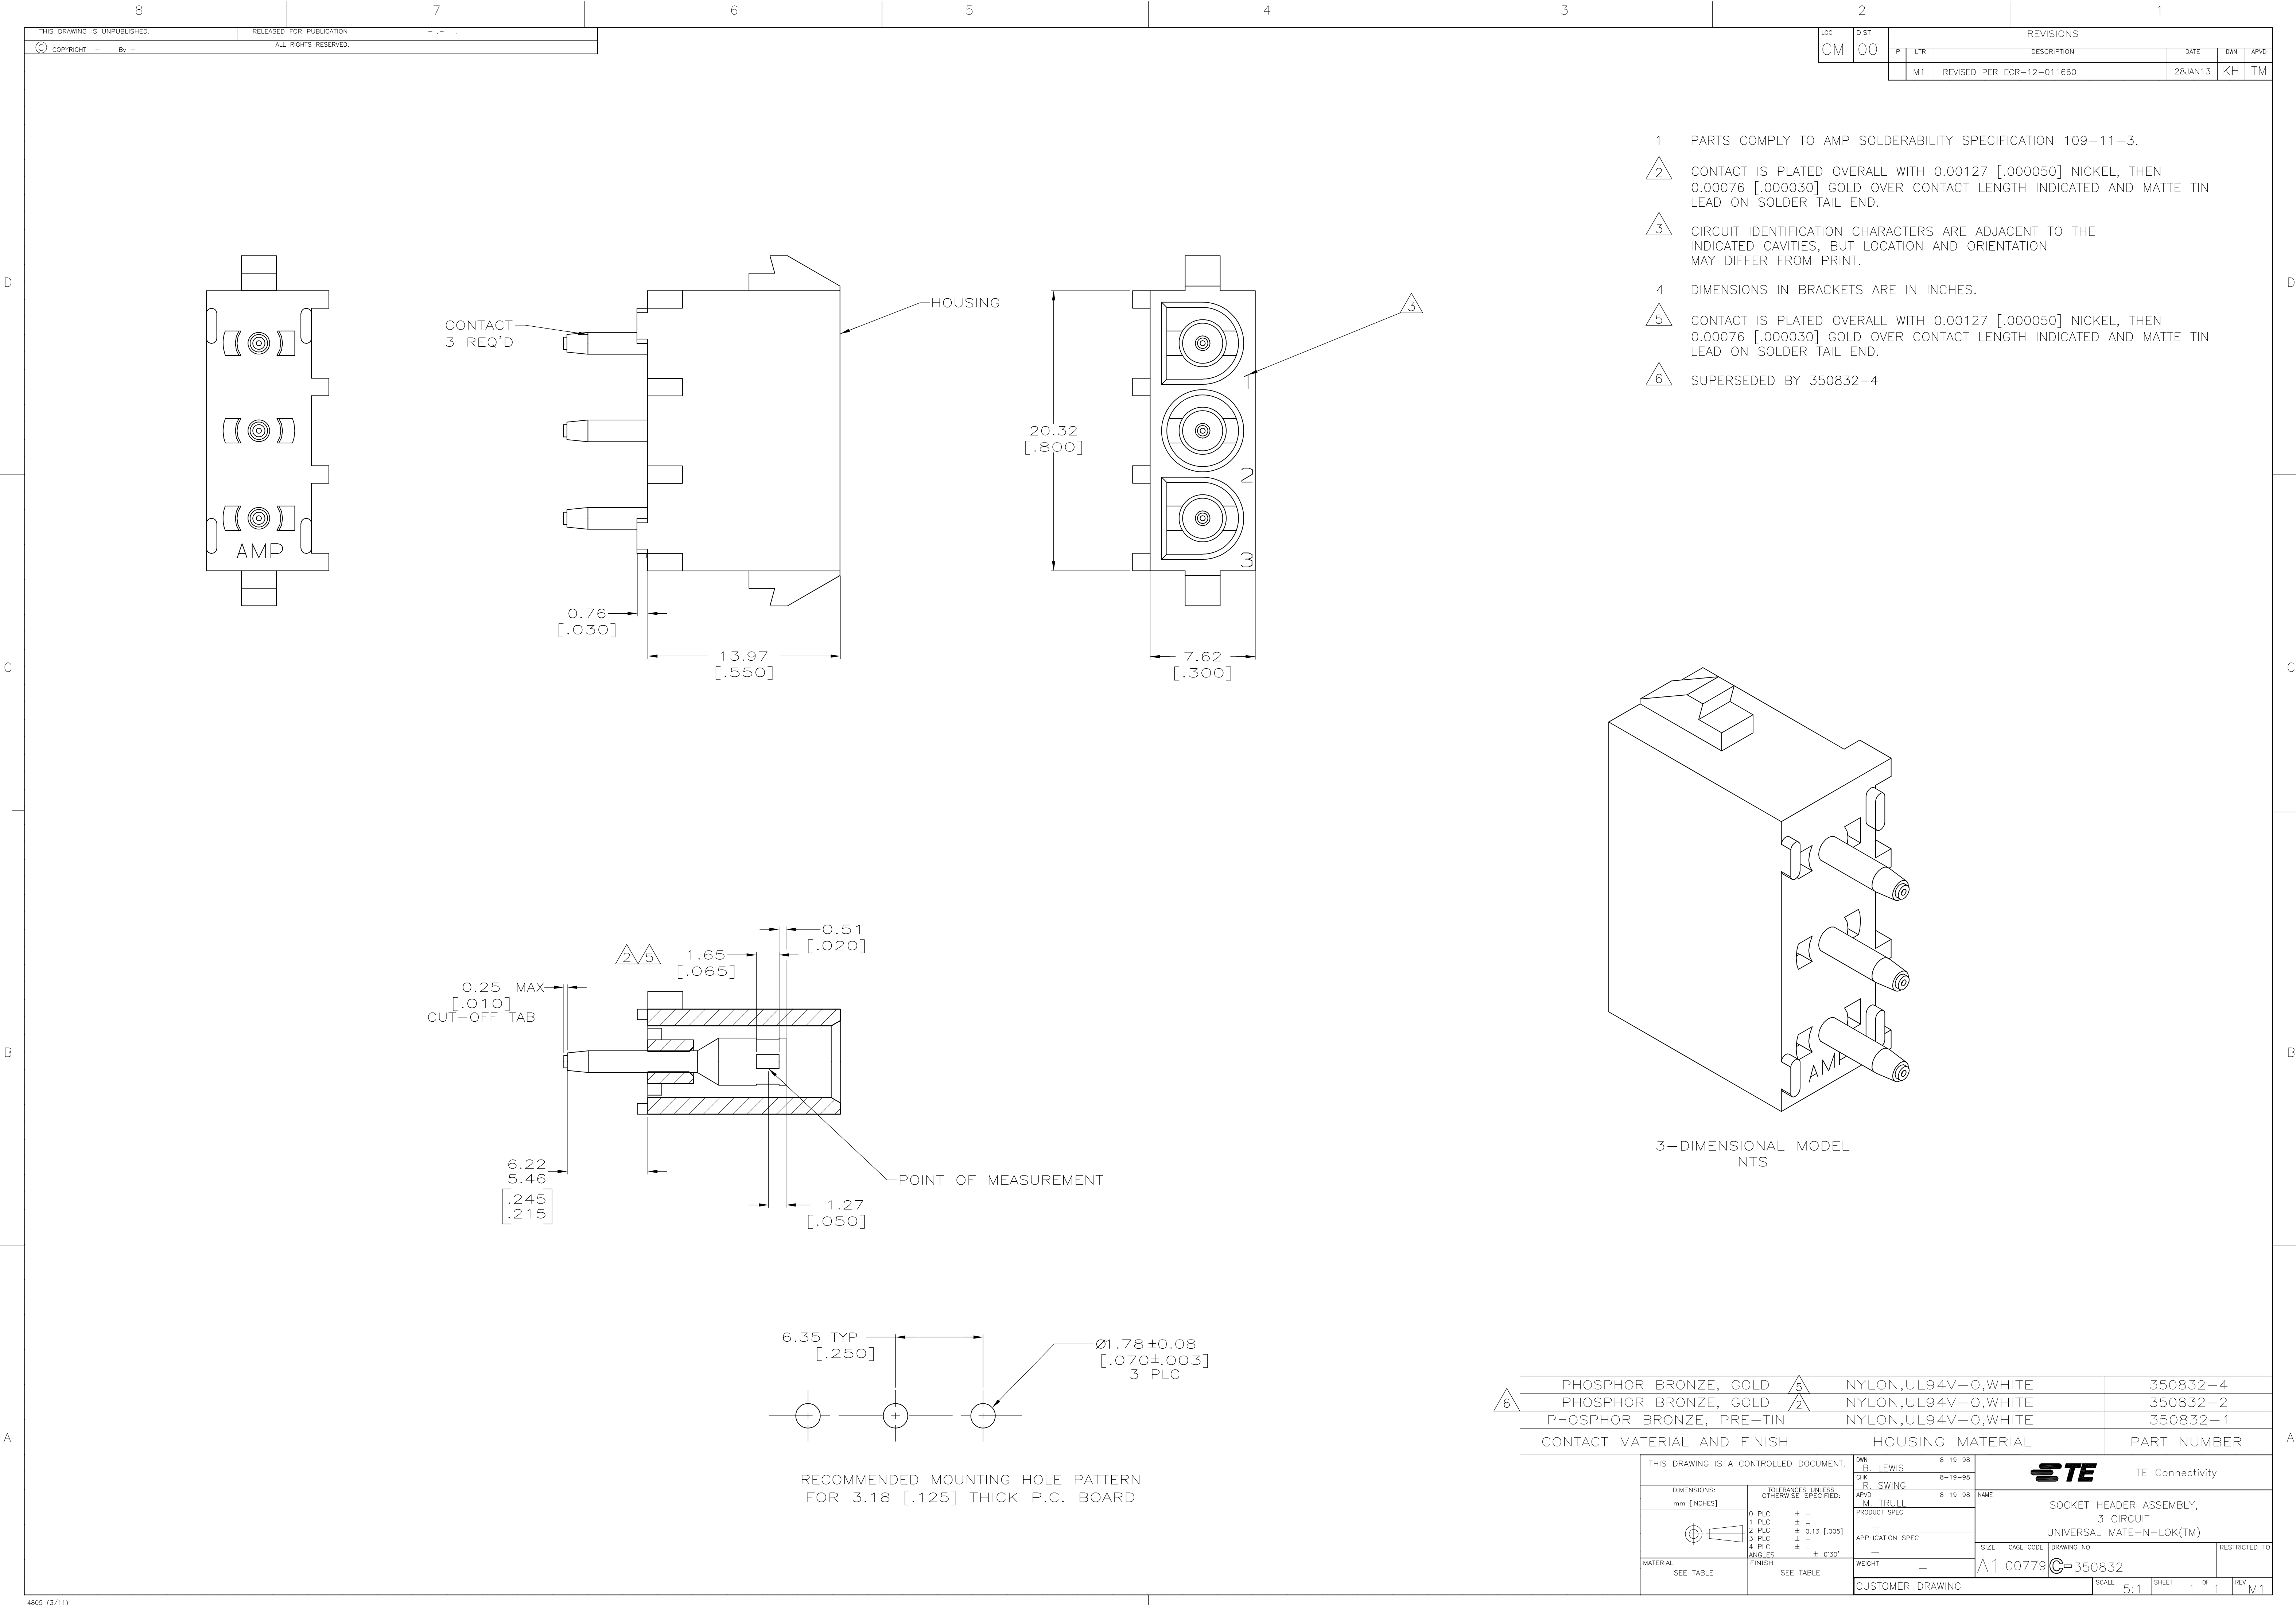

- 1 PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.
- 3 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.
- 6 SUPERSEDED BY 350832-4

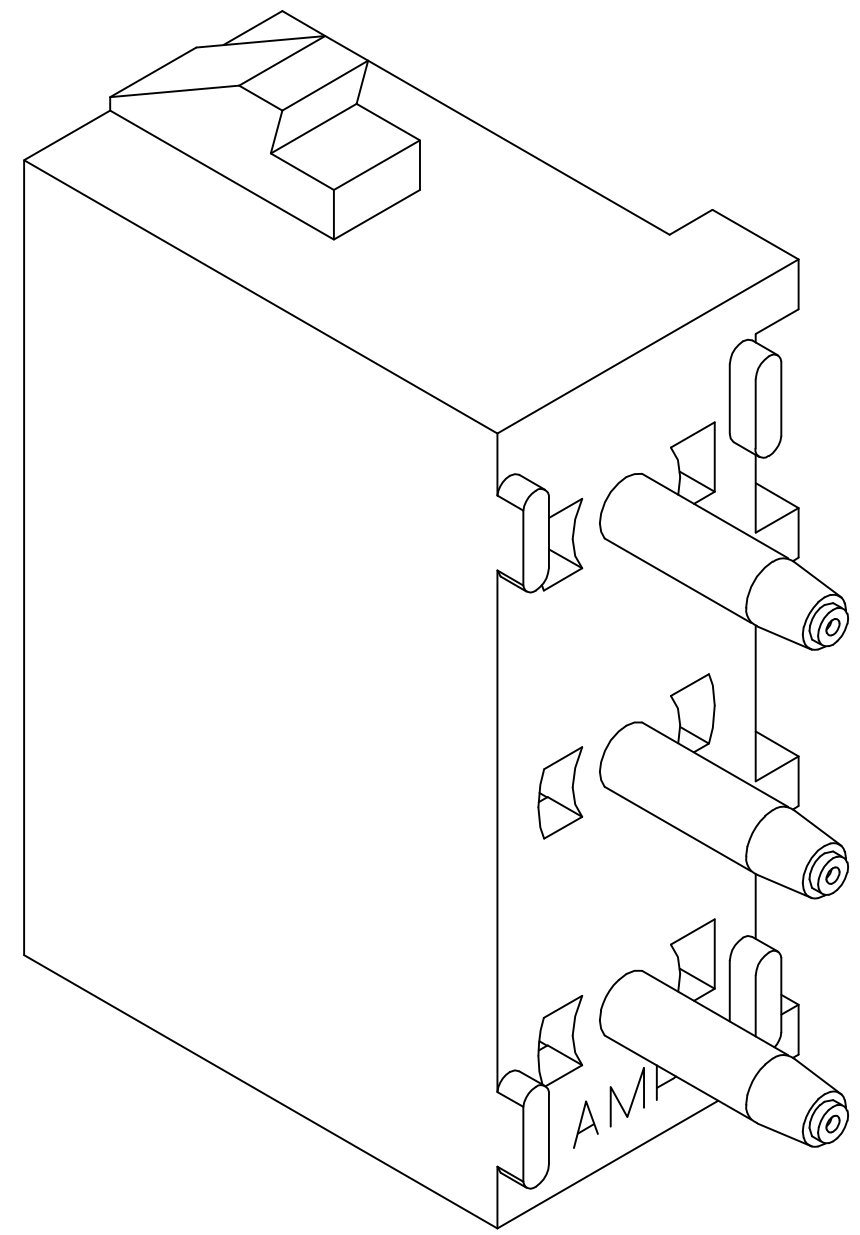

6	PHOSPHOR BRONZE, GOLD		5	NYLON,UL94V-0,WHITE	350832-4					
	PHOSPHOR BRONZE, GOLD		2	NYLON,UL94V-0,WHITE	350832-2					
	PHOSPHOR BRONZE, PRE-TIN			NYLON,UL94V-0,WHITE	350832-1					
	CONTACT MATERIAL AND FINISH			HOUSING MATERIAL		PART NUMBER				
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG B. LEWIS 8-19-98		 TE Connectivity				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK R. SWING 8-19-98			NAME			
		APVD M. TRULL 8-19-98		PRODUCT SPEC						
		—		—						
		—		—						
MATERIAL SEE TABLE		FINISH SEE TABLE		WEIGHT —		SIZE A1	CAGE CODE 00779	DRAWING NO C-350832	RESTRICTED TO —	
				CUSTOMER DRAWING		SCALE 5:1		SHEET 1	OF 1	REV M1