

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0529011474](#)
Status: **Active**
Description: 0.635mm (.025") Pitch SlimStack™ Receptacle, Surface Mount, Dual Row, Vertical Stacking, 11.00 to 16.00mm (.433 to .630") Stacking Heights, Embossed Tape with Cover Packaging, 140 Circuits, Lead-free

Documents:	
3D Model	Product Specification PS-52760-015 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

UL E29179

General

Product Family	PCB Receptacles
Series	52901
Application	Board-to-Board
Product Name	SlimStack™

Physical

Circuits (Loaded)	140
Color - Resin	White
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	None
Mated Height (mm)	11.00 mm, 12.00 mm, 13.00 mm, 14.00 mm, 15.00 mm, 16.00 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.025 In
Pitch - Mating Interface (mm)	0.64 mm
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	100V

Material Info

Reference - Drawing Numbers

Product Specification	PS-52760-015, RPS-52760-017, RPS-52760-018, RPS-52760-020, RPS-52760-021, RPS-52760-028, RPS-52760-029
Sales Drawing	SD-52901-008, SD-52901-009, SD-52901-015

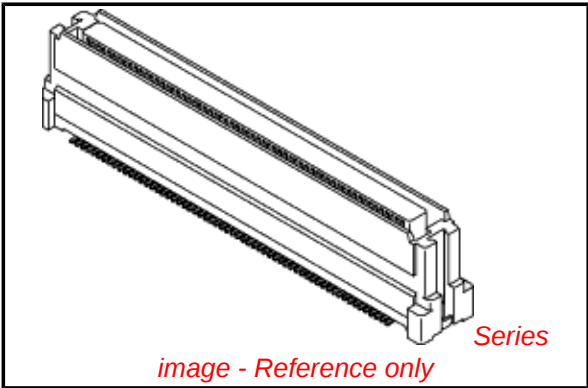


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)





Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[52901Series](#)

Mates With
[53475](#) , [53643](#) , [55091](#) , [53481](#) , [53625](#) ,,
[53551](#) , [53647](#) , [53552](#) , [53649](#) , [53553](#) ,
[53627](#)

This document was generated on 04/15/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

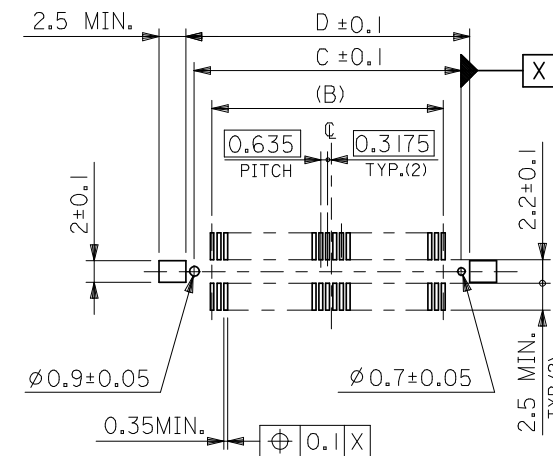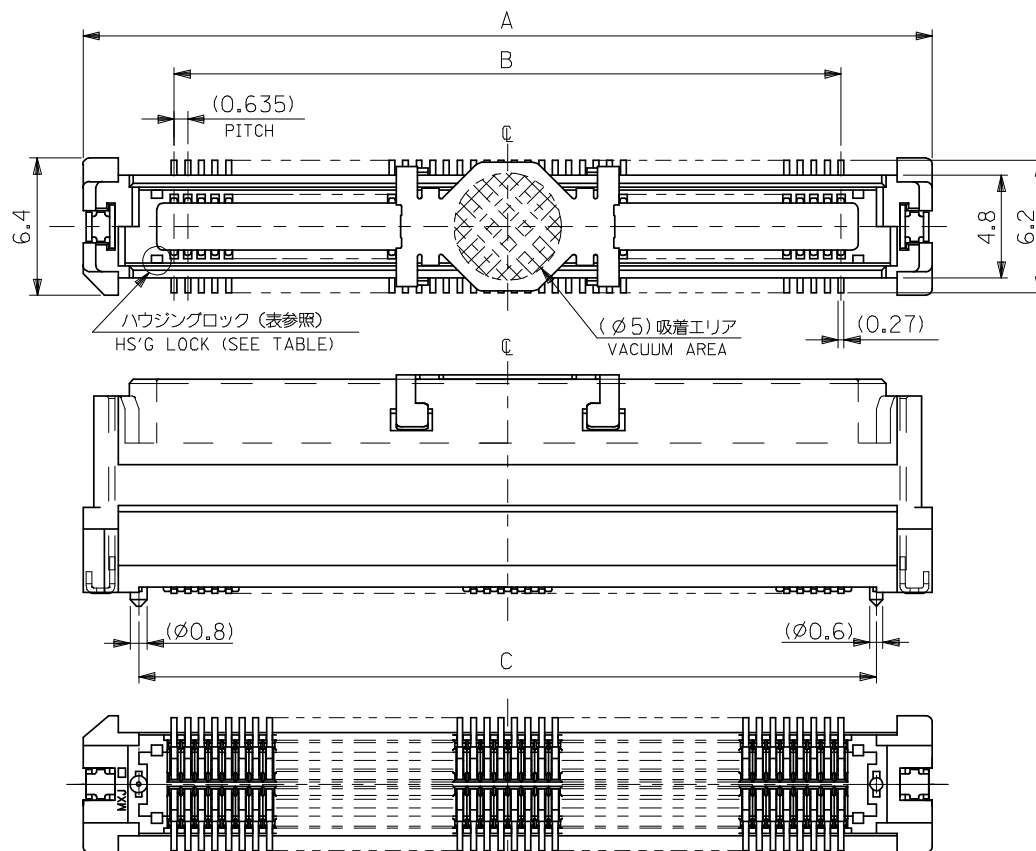

RECOMMENDED PCB PATTERN LAYOUT

注)
NOTES

1. 材質
MATERIAL
ハウジング：ガラス入りLCP、白色、UL94V-0
HOUSING:G.F.LCP,WHITE,UL94V-0
ターミナル：銅合金 (t=0.2)
TERMINAL:COPPER ALLOY
吸着力バー：ステンレス (t=0.2)
VACUUM COVER:STAINLESS STEEL
補強金具：銅合金 (t=0.25)
FITTING NAIL:COPPER ALLOY
2. メッキ仕様
PLATING
ターミナル：接点部：金メッキ 0.25μmMIN.
TERMINAL：CONTACT AREA:GOLD 0.25μmMIN.
半田付け部：鍍メッキ 1μmMIN.
SOLDER TAIL AREA:TIN 1μmMIN.
下地メッキ：ニッケルメッキ 2μmMIN.
UNDER-PLATING:NICKEL 2μmMIN.
補助金具：錫メッキ 1.0マイクロメートル以上
FITTING NAIL OVER PLATING TIN 1.0 MICROMETER MINIMUM
下地メッキ ニッケルメッキ 1.0マイクロメートル以上
UNDER PLATING NICKEL 1.0 MICROMETER MINIMUM
3. テールのパラツキ寸法
TAIL COPLANARITY
テール平坦度は、0.1MAX.とする。
TAILS COPLANARITY TO BE 0.1MAX.
4. エンボス対応済みの種数については、SD-52901-009を参照下。
FOR THE EMBOSSED PACKAGE PRODUCTS,SEE SD-52901-009.
5. 本製品は 52901-***2 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52901-***2.

無し NO	48.72	47.12	43.815	52.32	52901-1474	52901-1475	52901-1472	140	○
	42.37	40.77	37.465	45.97	▲ -1274	▲ -1275	▲ -1272	120	○
	36.02	34.42	31.115	39.62	-1074	-1075	-1072	100	○
	32.85	31.25	27.94	36.45	-0974	-0975	-0972	90	○
	29.67	28.07	24.765	33.27	-0874	-0875	-0872	80	○
有り YES	26.5	24.9	21.59	30.1	-0774	-0775	-0772	70	○
	23.32	21.72	18.415	26.92	-0674	-0675	-0672	60	○
	16.97	15.37	12.065	20.57	-0474	-0475	-0472	40	○
	13.8	12.2	8.89	17.4	▼ -0374	▼ -0375	▼ -0372	30	○
	10.62	9.02	5.715	14.22	52901-0274	52901-0275	52901-0272	20	○
ハウジングロック H'S'G LOCK	D	C	B	A	エンボス梱包 EMBOSSED PACKAGING	スティック梱包 STICK PACKAGING	製品番号 MATERIAL NO.	極数 CKT. NO.	庫容対応 AVAILABLE
					ORDER No.	オーダー番号			

REVISED	EC NO.: J2008-4316	2008/06/19	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
	DRWN: NABEI	2008/06/23		10 UNDER	± 0.2	DRAWN BY M. NINOMIYA	DATE '04/03/04	TITLE 0.635 PITCH B-TO-B CONN. REC. HS'G COVER ASS'Y -LEAD FREE-				
	CHK'D: THARUYAMA	2008/06/23		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TOJO	DATE '04/03/04					
	APPR: NUKITA	2008/06/23		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE '04/03/04					
	REV	B		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE		SD-52901-008		1 OF 1					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												

F

E

D

C

B

A

F

E

D



C

B


A

注)
NOTES

1. 製品番号 52901-***72 の詳細寸法については、SD-52901-008 を参照下さい。
IN THE PACKAGE , PART NO.52901-***72 DETAILED DIMENSIONS , SEE SD-52901-008
2. 梱包数量 : 440 個/リール
NUMBER OF CONNECTORS : 440 PCS/REEL
3. リードテープ長さ
LEAD TAPE LENGTH

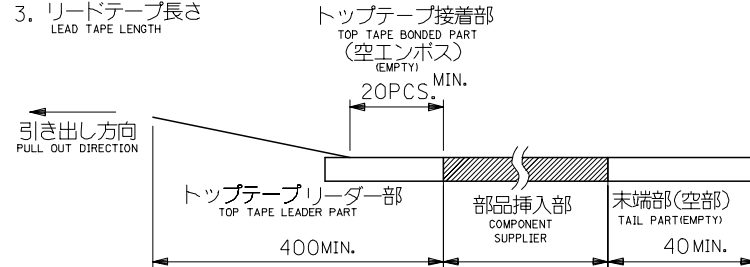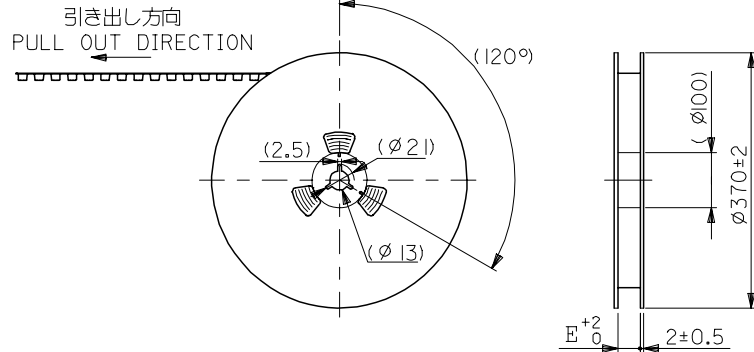


4. トップテープの剥離強度 (剥離方向は下図参照)
PEELING OFF FORCE OF TOP TAPE (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
0. 1N~1. 3N {10gf~130gf} : キャリアテープ幅24mm~72mm
CARRIER TAPE WIDTH 24mm~72mm
- 尚、本規格値は、出荷時に適用。
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
(但し、輸送時に剥離が発生しない事。)
(PEEL OFF SHOULD NOT BE ALLOWED,DURING TRANSPORTATION)

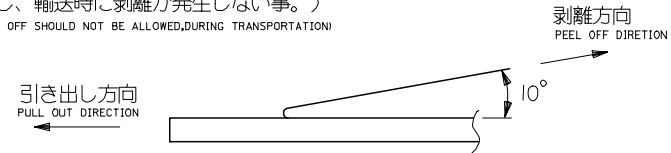



5. 材料
MATERIAL
キャリアテープ : ポリプロピレン (PP)
CARRIER TAPE : POLYPROPYLENE (PP)
トップテープ : PET, PE, PEF
TOP TAPE : PET, PE, PEF
リール : 紙
REEL : CARD BOARD
6. 本製品は 52901-***4 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52901-***4.

52901-***74
MODEL NO.

REVISED EC NO: J2006-0585 DRW:HYAJI MA CHKDN: UKITA APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY M.NINOMIYA	DATE '04/03/04	TITLE EMBOSSD TAPE PACKAGE FOR 52901-**72 -LEAD FREE-				
		10 OVER 30 UNDER	± ---	CHECKED BY K.TOJO	DATE '04/03/04					
		30 OVER	± ---	APPROVED BY M.SASAO	DATE '04/03/04	MOLEX INCORPORATED				
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52901-009		1 OF 3		
	REV	A		SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

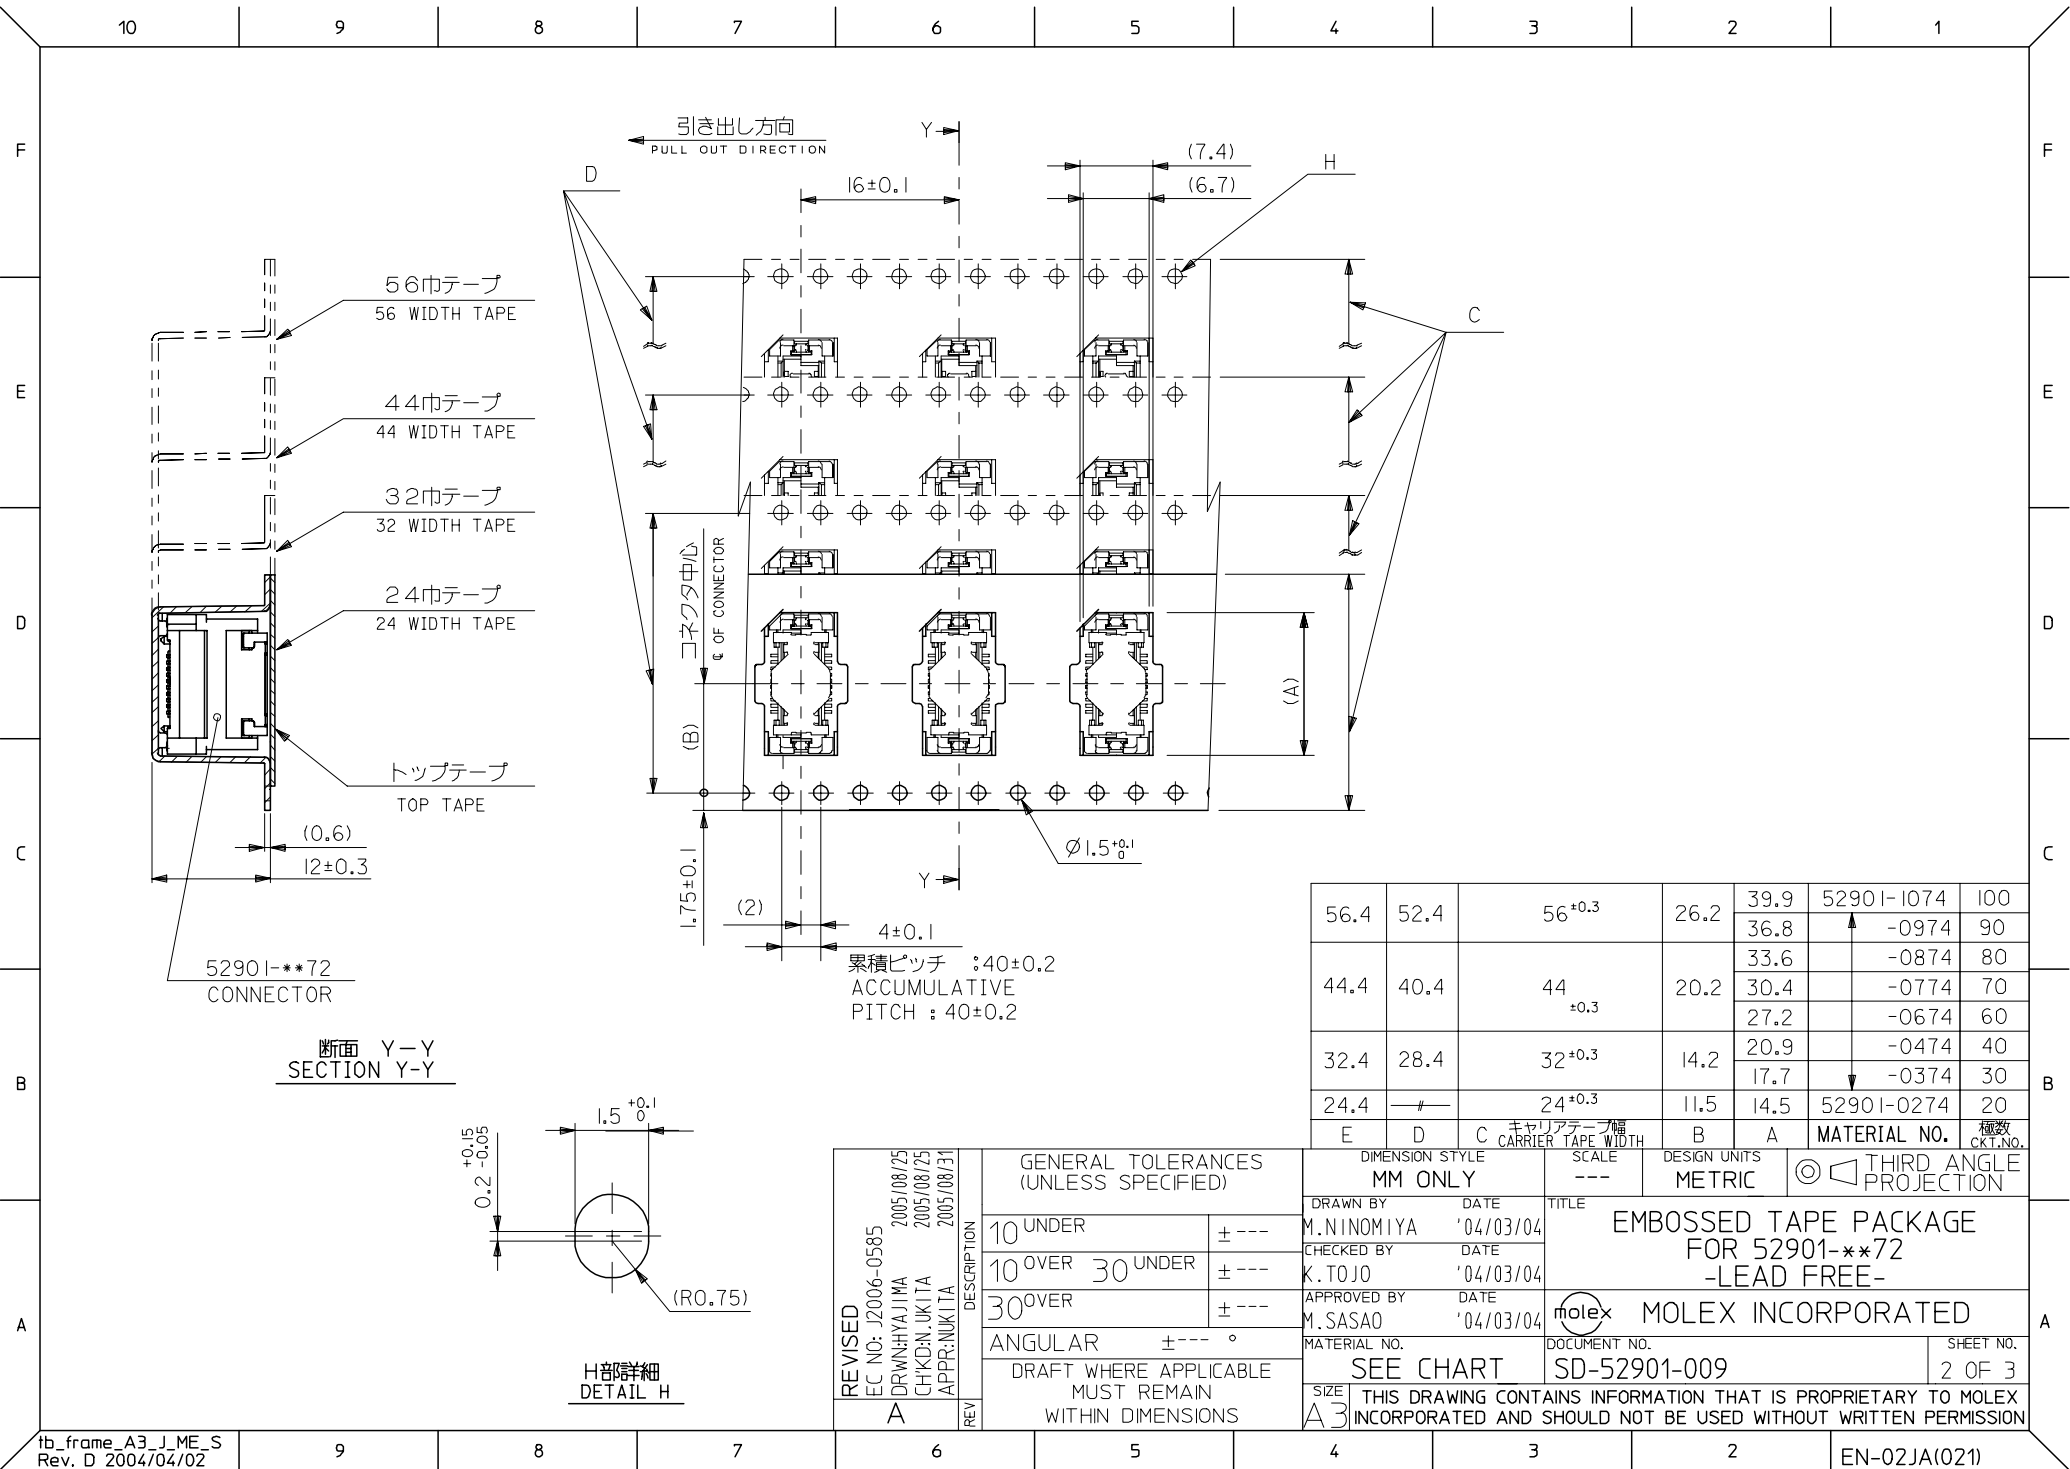

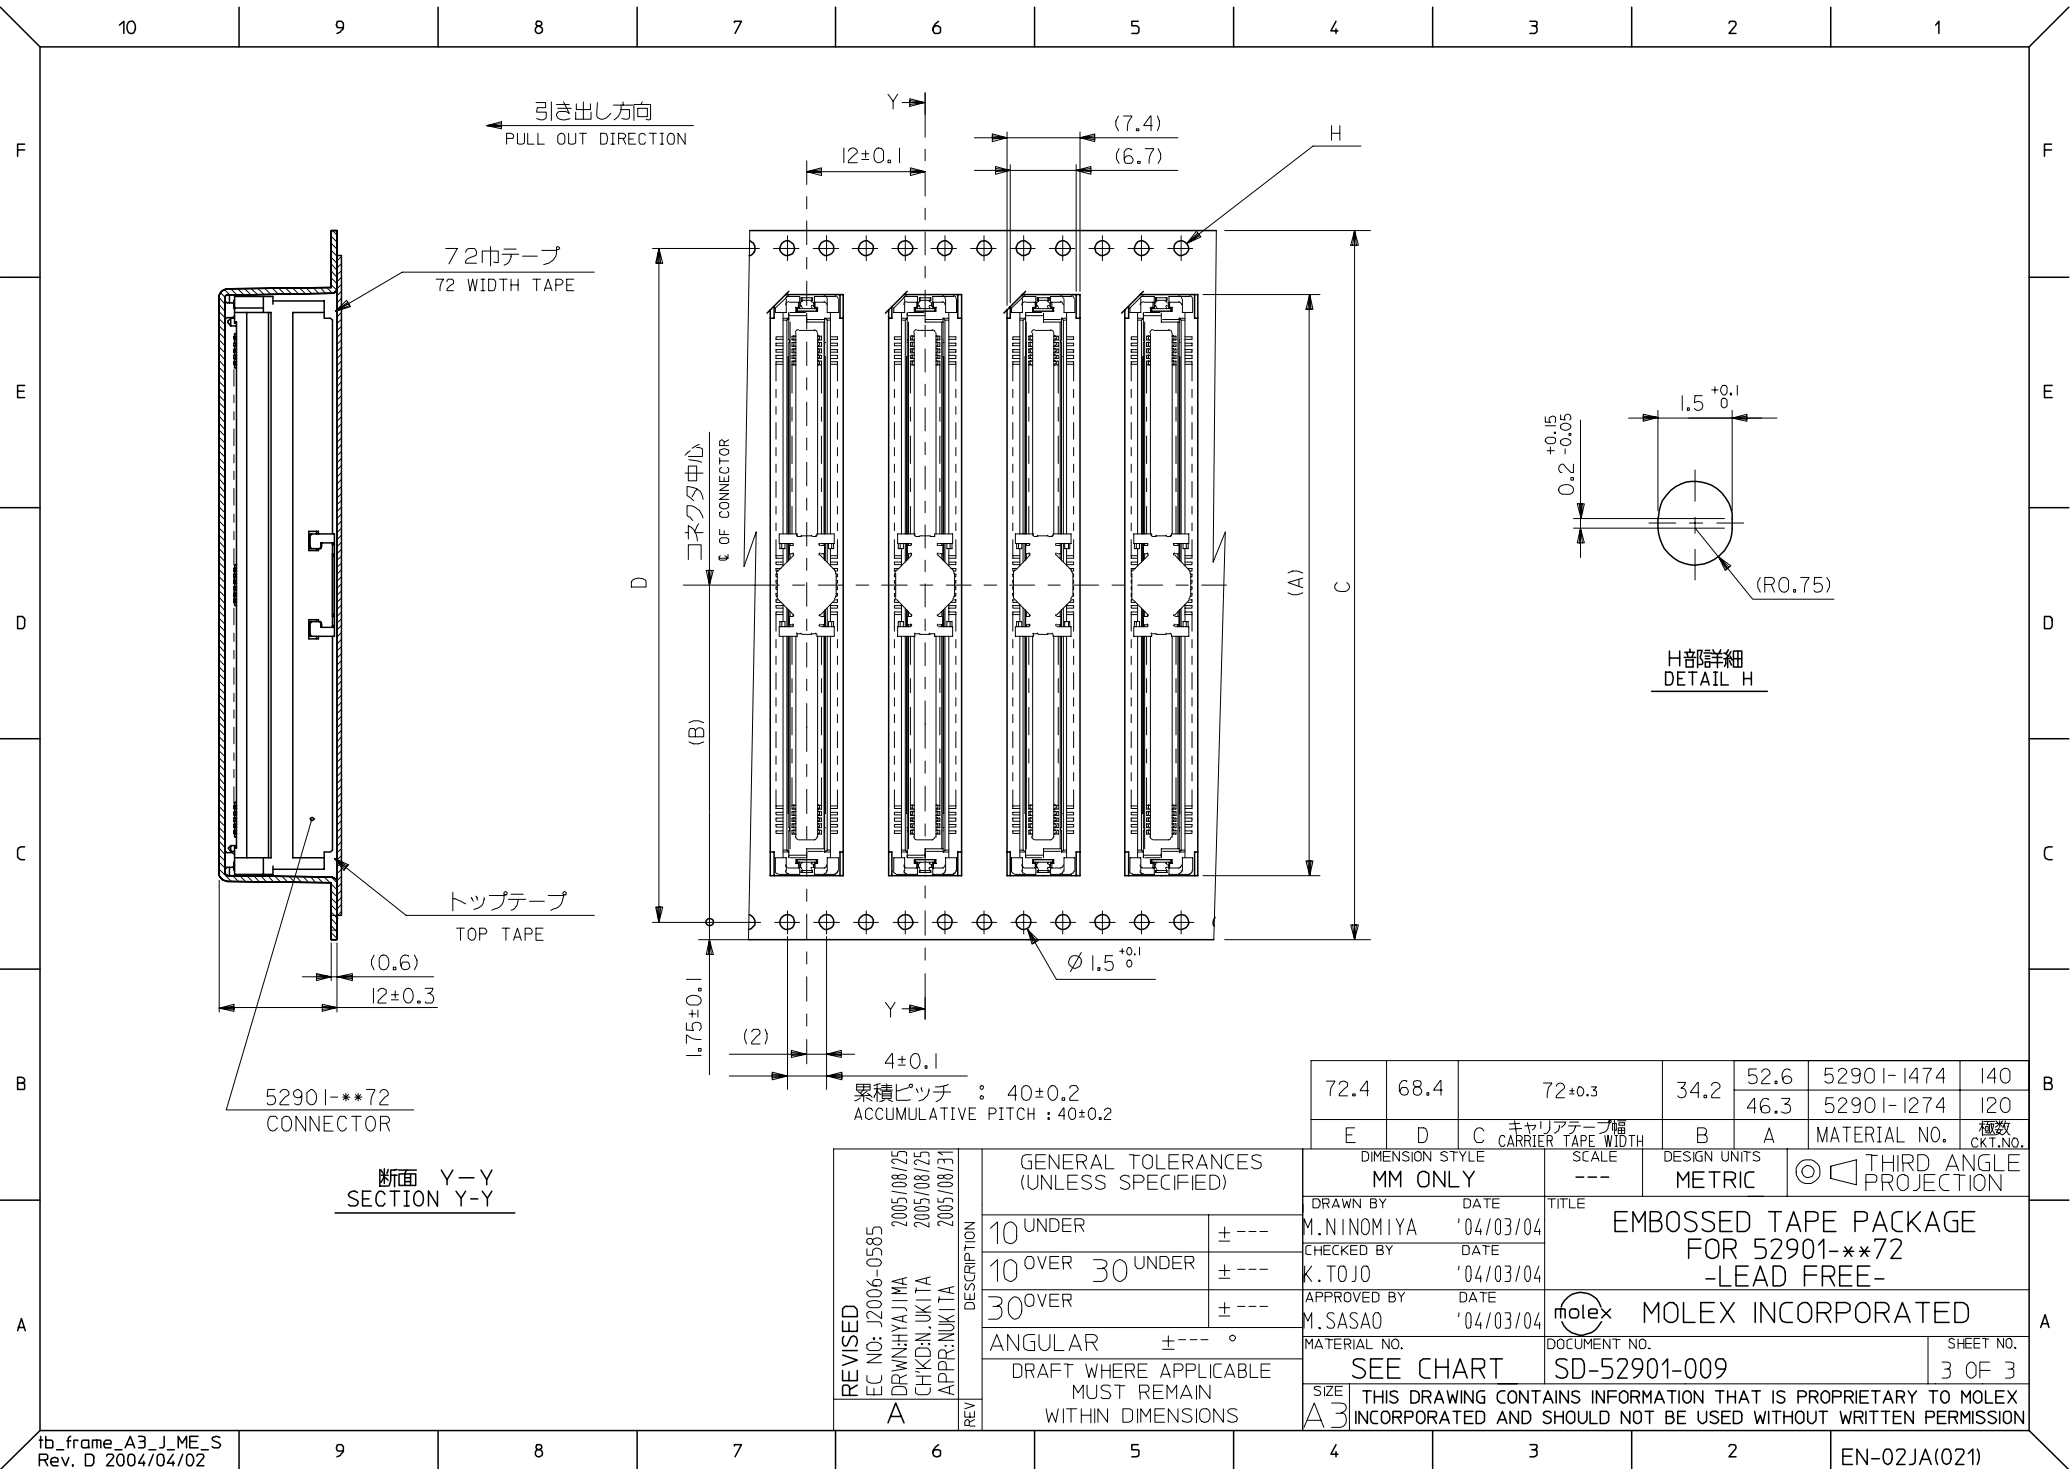

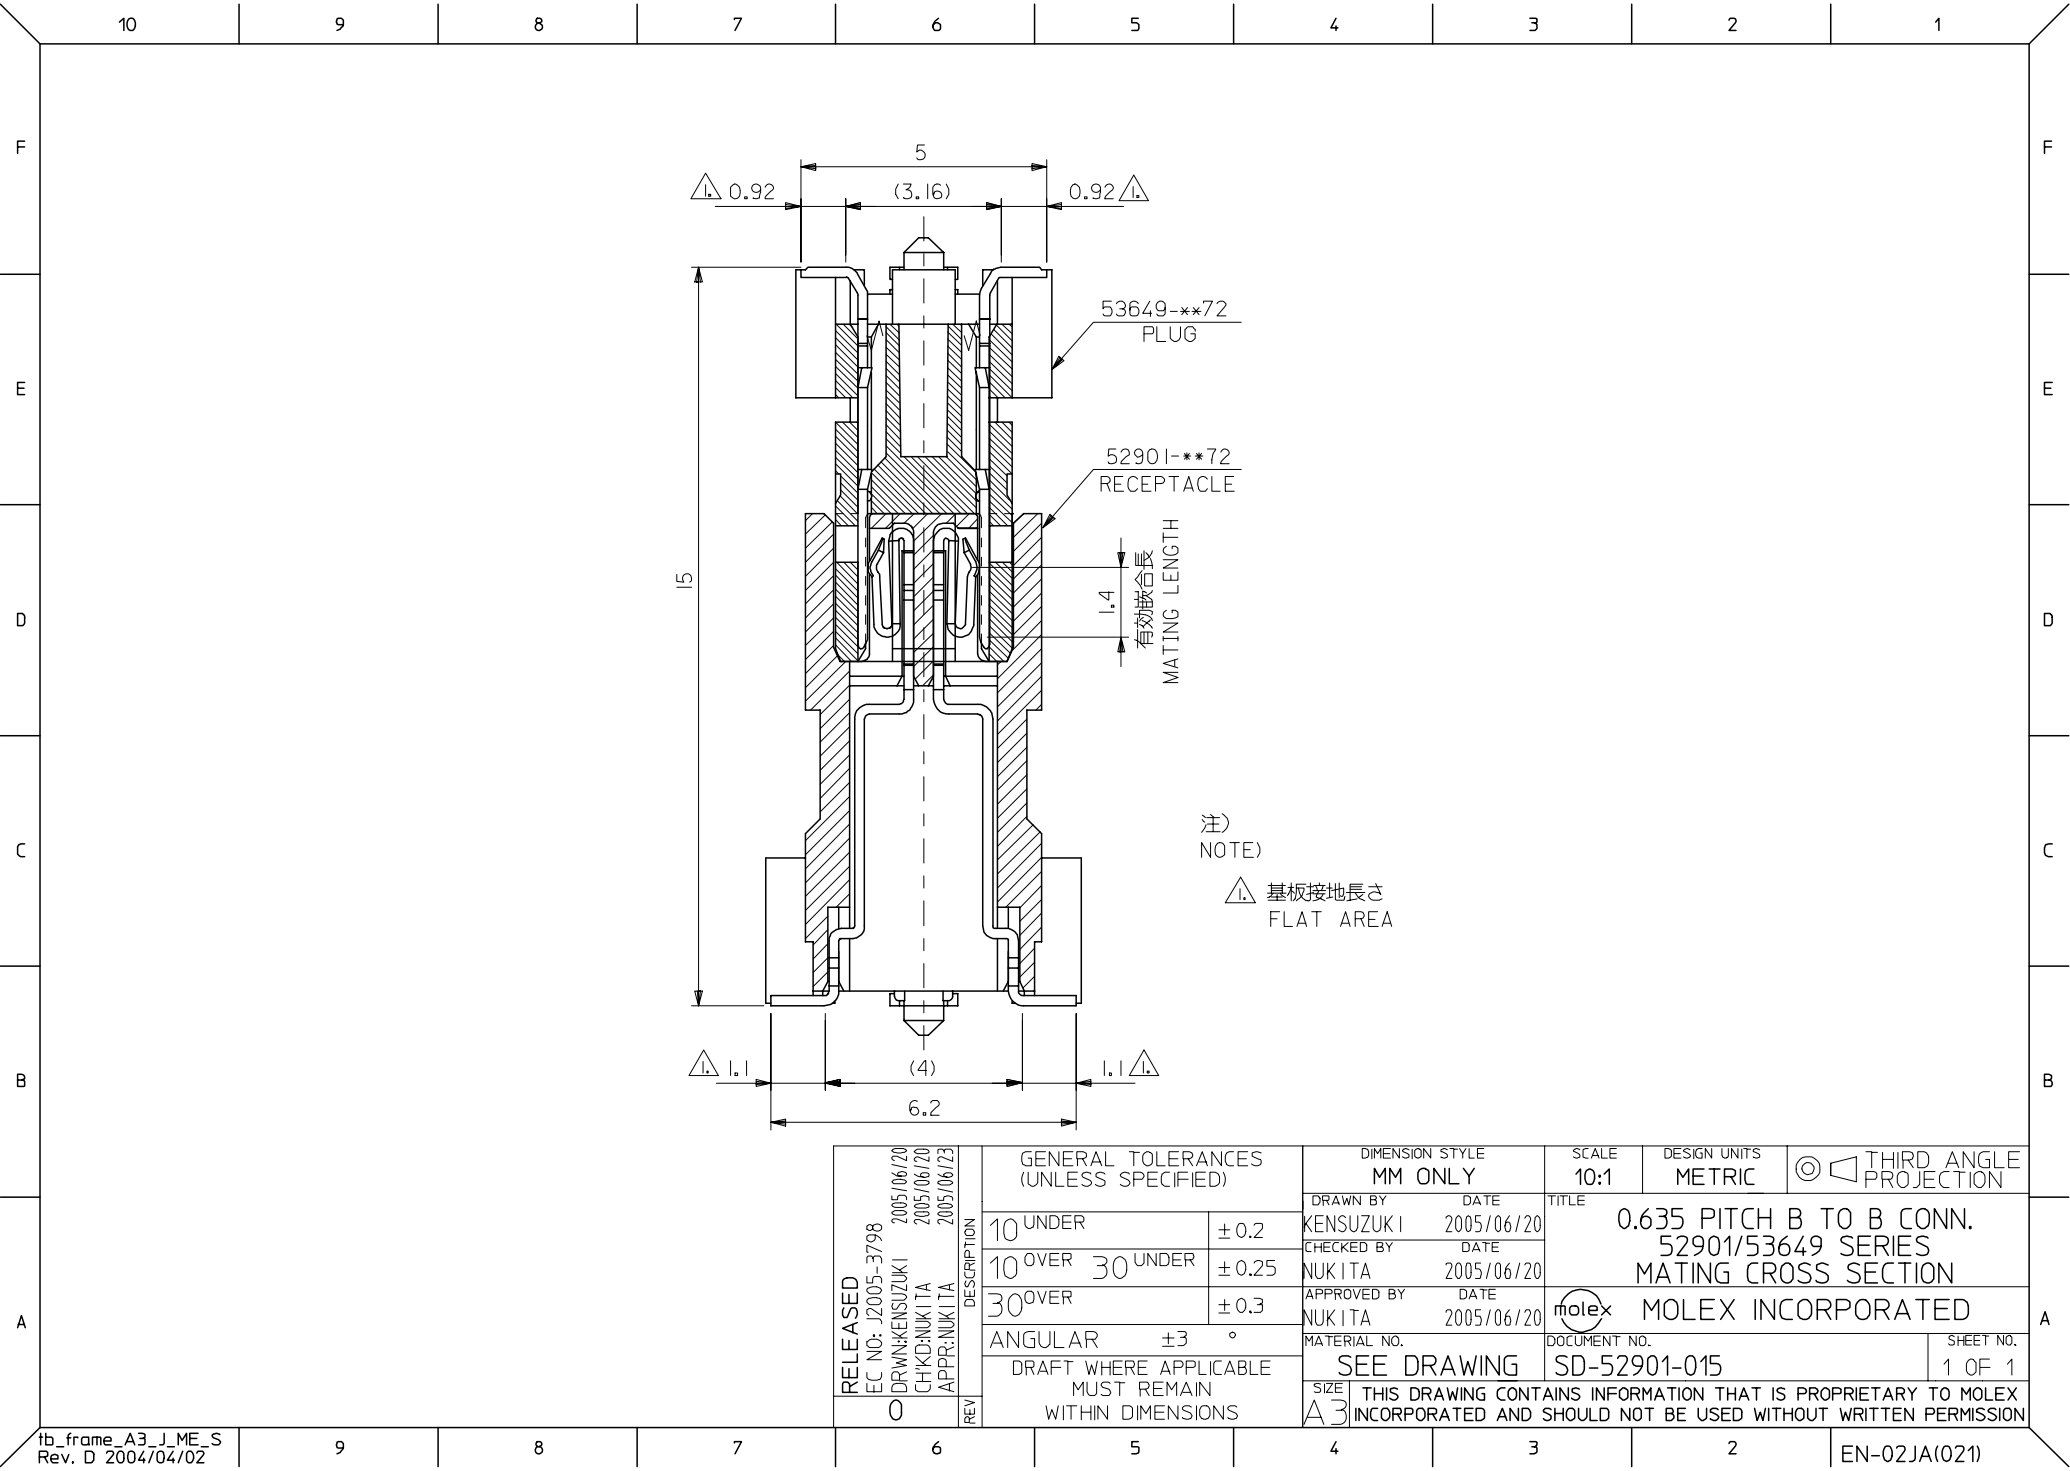

注)
NOTE)
△ 基板接地長さ
FLAT AREA

RELEASED EC NO: J2005-3798 DRWN: KENSUZUKI CHKD: NUKITA APPR: NUKITA O	REV	DESCRIPTION 2005/06/20 2005/06/20 2005/06/23	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			10 UNDER	± 0.2	DRAWN BY KENSUZUKI	DATE 2005/06/20	TITLE 0.635 PITCH B TO B CONN. 52901/53649 SERIES MATING CROSS SECTION				
			10 OVER 30 UNDER	± 0.25	CHECKED BY NUKITA	DATE 2005/06/20					
			30 OVER	± 0.3	APPROVED BY NUKITA	DATE 2005/06/20	MOLEX INCORPORATED				
			ANGULAR	± 3 °	MATERIAL NO. SEE DRAWING						DOCUMENT NO. SD-52901-015
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					