

LT3513EUHF

2MHz, High Current 5 Output Switching Regulator for TFT-LCD Panels

DESCRIPTION

Demonstration circuit 1028 is a highly integrated, 5 output regulator for TFT LCD panels featuring LT[®]3513, which comes in the 38-pin QFN package. The DC1028A has an input voltage range from 8 to 30V, and produce a 5V logic voltage. A lower voltage logic supply can be generated from this 5V by adding an external NPN driven by a linear regulator. The other three regulators provide the three voltages required by LCDs: a higher power boost regulator to generate AVDD, a lower power boost to generate VON and an inverting converter to provide VOFF. An internal high side PNP provides delayed turn on of the VON signal. The LT3513's wide input voltage range allows it to accept a variety of power sources, including automo-

tive batteries, distributed supplies and wall transformers.

All four switchers are synchronized to the internal 2MHz clock, allowing the use of low profile inductors and ceramic capacitors. They all have soft start to limit inrush current.

The LT3513 datasheet gives a complete description of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for demo circuit 1028A.

Design files for this circuit board are available. Call the LTC factory.

LT, LTC and LT are registered trademarks of Linear Technology Corporation. ThinSOT and PowerPath are trademarks of Linear Technology Corporation.

Performance Summary ($T_A = 25^{\circ}\text{C}$)

PARAMETER FOR BUCK REGULATOR	CONDITION	VALUE
Minimum Input Voltage		8V
Maximum Input Voltage		30V
Output Voltage V_{LOGIC}	$V_{\text{IN}}=8\text{V to }30\text{V}, I_{\text{OUT}}=0 \text{ to } 500\text{mA}$	5V +/- 4%
Maximum Output Current at V_{LOGIC}	$V_{\text{IN}}=8\text{V to }30\text{V}$	500mA
Typical Switching frequency		2MHz

QUICK START PROCEDURE

Demonstration circuit 1028 is easy to set up to evaluate the performance of the LT3513. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. With Power off, connect the input power supply to Vin and GND. Insert jumper JP1 into the ON position.
2. Set the input between 8V to 30V. Turn on the power at the input.
3. Check for the proper output voltage. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.
4. Once the proper output voltages are established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

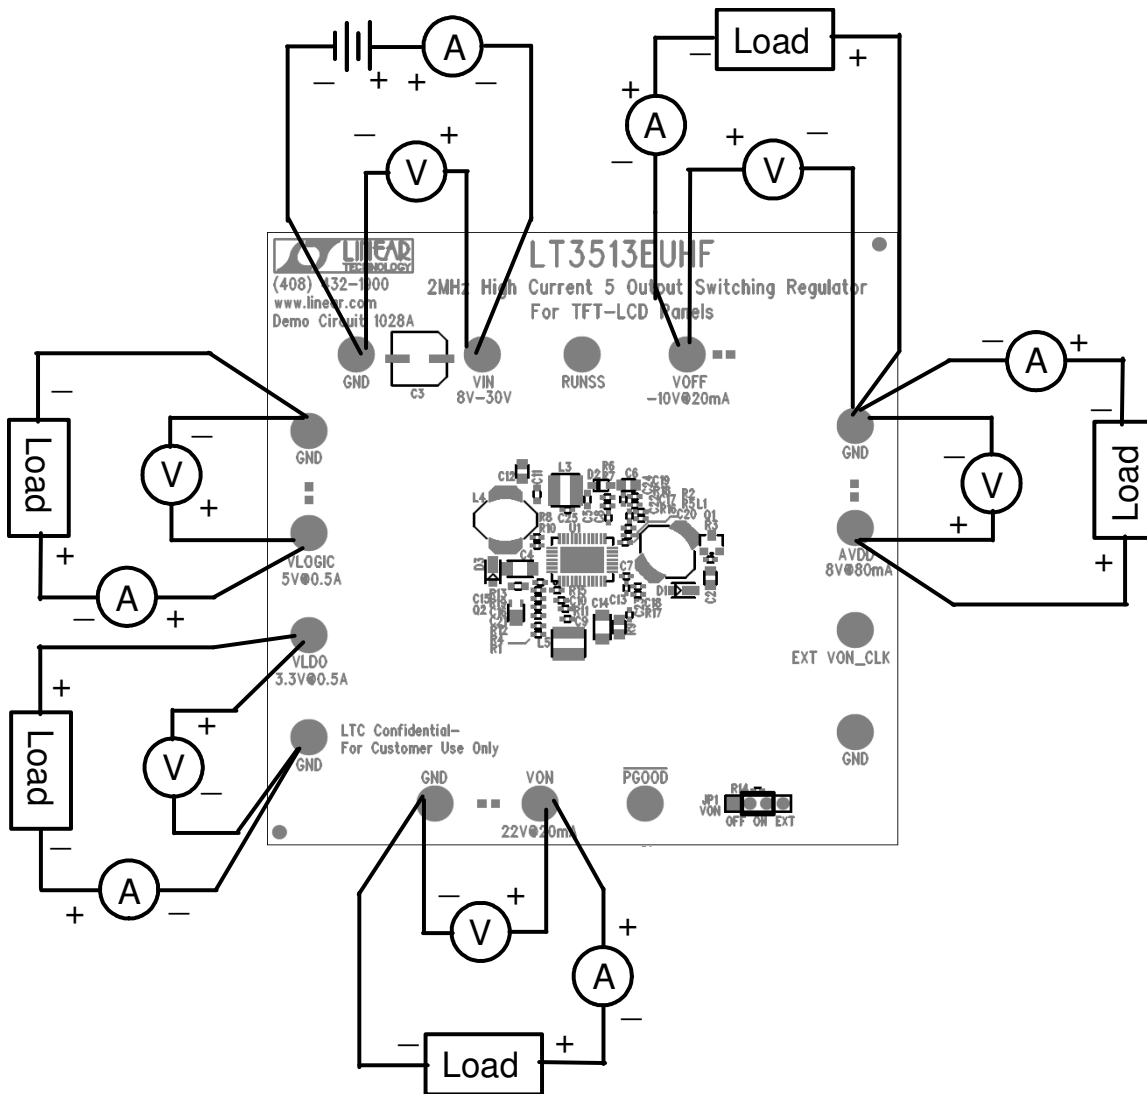


Figure 1. Proper Measurement Equipment Setup


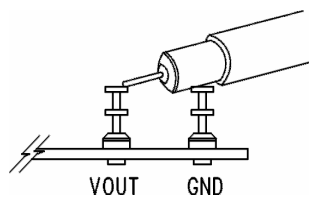


Figure 2. Measuring Input or Output Ripple

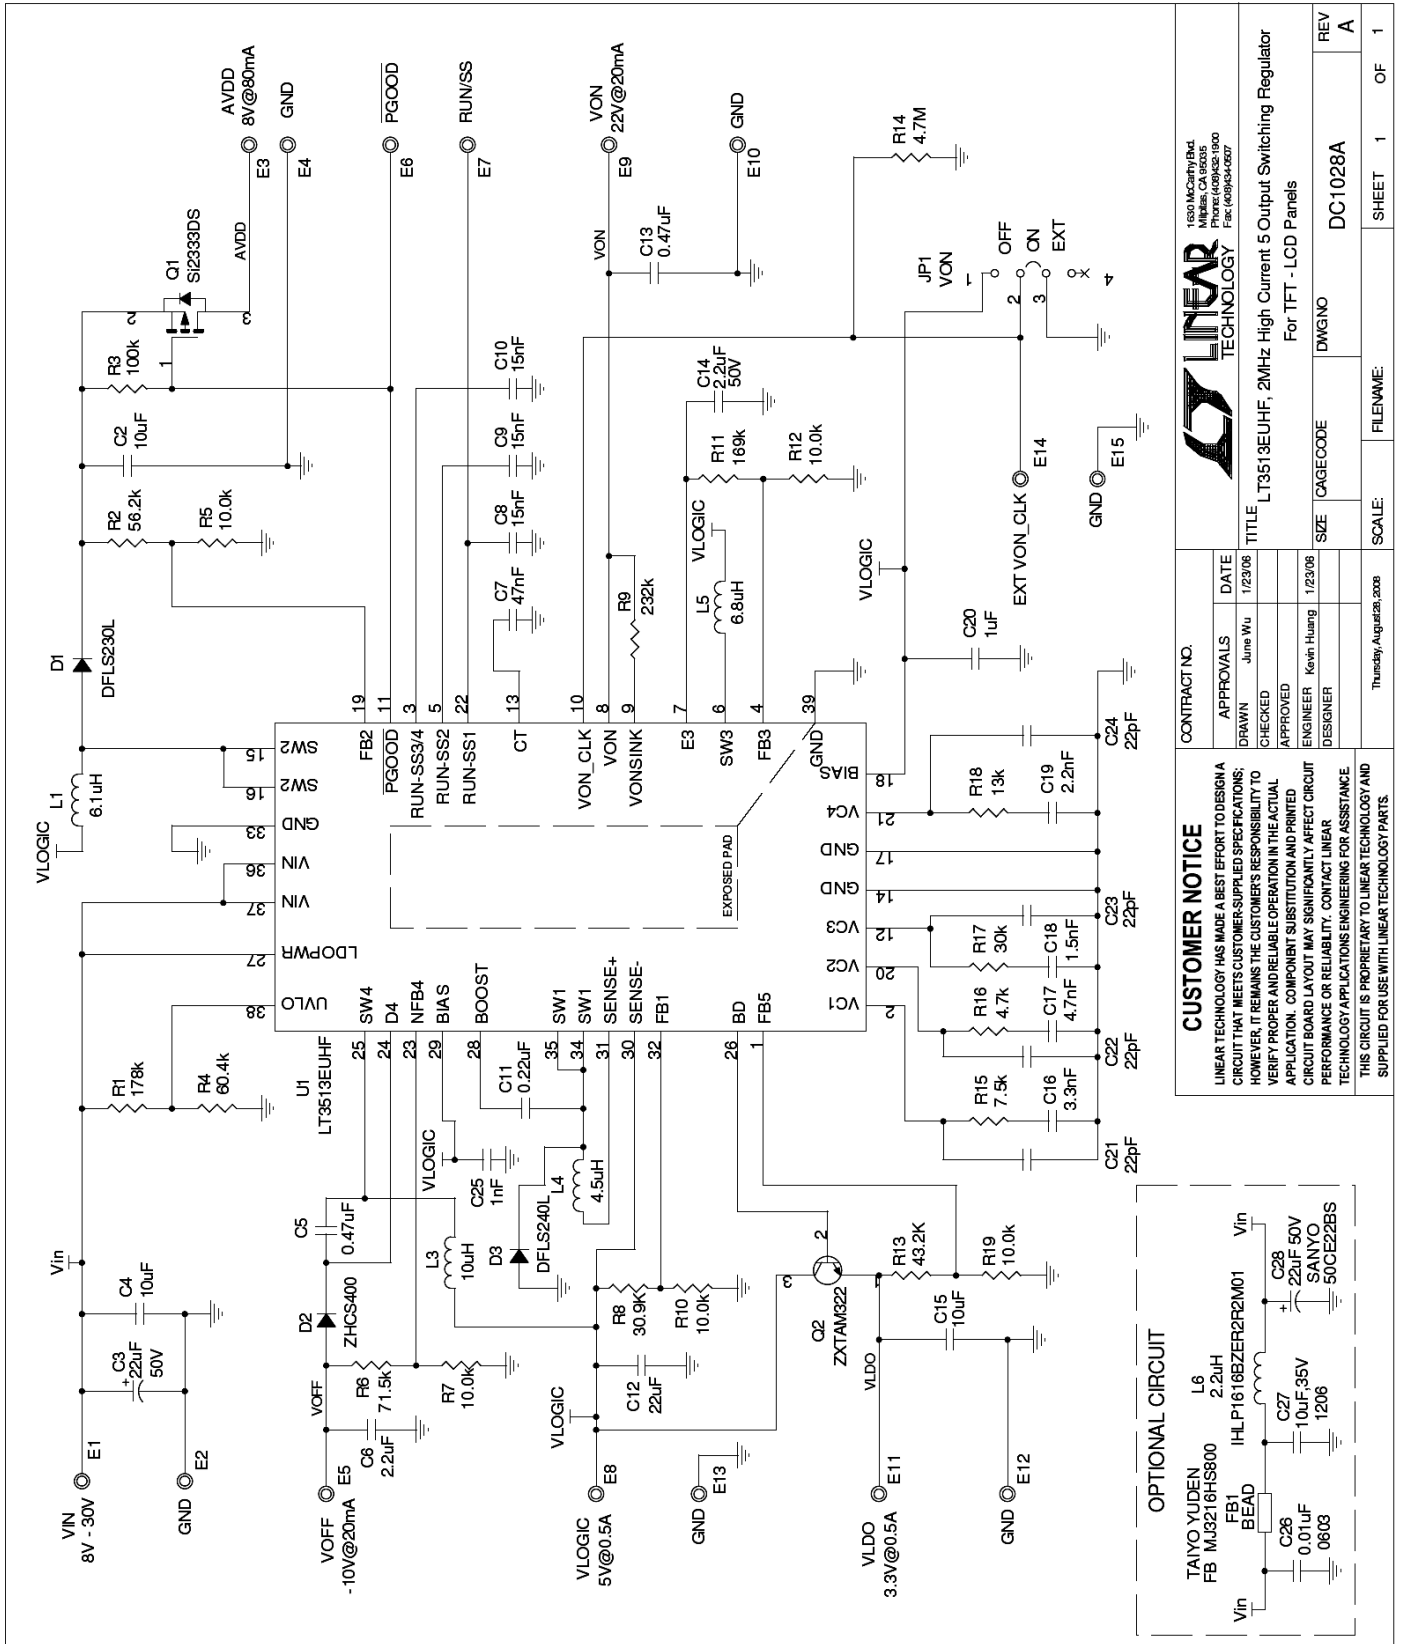

<p>1650 McCarty Blvd Phoenix, AZ 85024-1900 Phone: (480) 952-1900 Fax: (480) 952-0977</p> <p>LINEAR TECHNOLOGY</p>			
<p>CONTRACT NO. _____</p>			
APPROVALS	DATE		
DRAWN June Wu	1/23/06		
CHECKED _____	_____		
APPROVED _____	_____		
ENGINEER Kevin Huang	1/23/06		
DESIGNER _____	_____		
<p>TITLE LT3513EUHF, 2MHz High Current 5 Output Switching Regulator For TFT - LCD Panels</p>			
SIZE	CAGE CODE	DWG NO	REV
_____	_____	DC1028A	A
SCALE:	FILENAME:	SHEET	OF
Thursday, August 28, 2008	_____	1	1

CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.