

4

3

2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		B1	REVISED PER ECO-11-004587	11MAR11	RK	HMR




MATERIALS:
HOUSING: POLYAMIDE, UL94V-0, BLACK.
TERMINALS: COPPER ALLOY, TIN PLATED.
SCREWS: STEEL, ZINC PLATED, UNLESS OTHERWISE STATED.

ELECTRICAL:
RATING: 20A, UL & CSA.


MECHANICAL:
WIRE RANGE: 12-22 AWG.
MAXIMUM TIGHTENING TORQUE: 7 IN-LBS.

ENVIRONMENTAL:
CONTINUOUS OPERATING TEMP.: -40°C TO +105°C

- 1 PRELIMINARY PART NUMBER.
- 2 SCREWS ARE NICKEL PLATED BRASS.

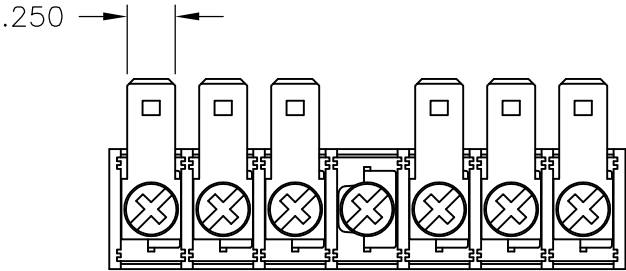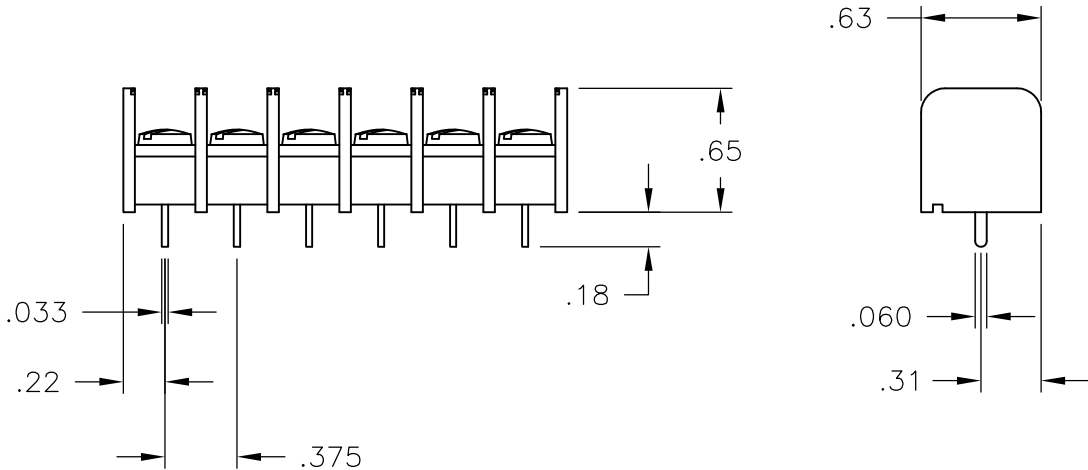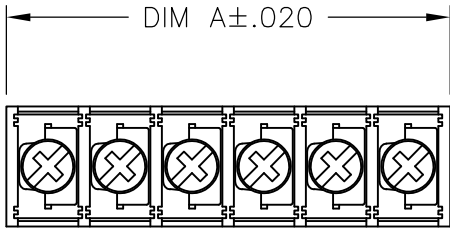

1546834-6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 8/17/04	 TE Connectivity					
		CHK S YODER 8/17/04						
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .010 4 PLC ± - ANGLES ± -	APVD S YODER 8/17/04	NAME NC6-P107-XX ASSEMBLY					
		PRODUCT SPEC -						
		APPLICATION SPEC -	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT -	A3		00779	C-1437664-4	-	
MATERIAL -	FINISH -	CUSTOMER DRAWING				SCALE NTS	SHEET 1 OF 1	REV B1