


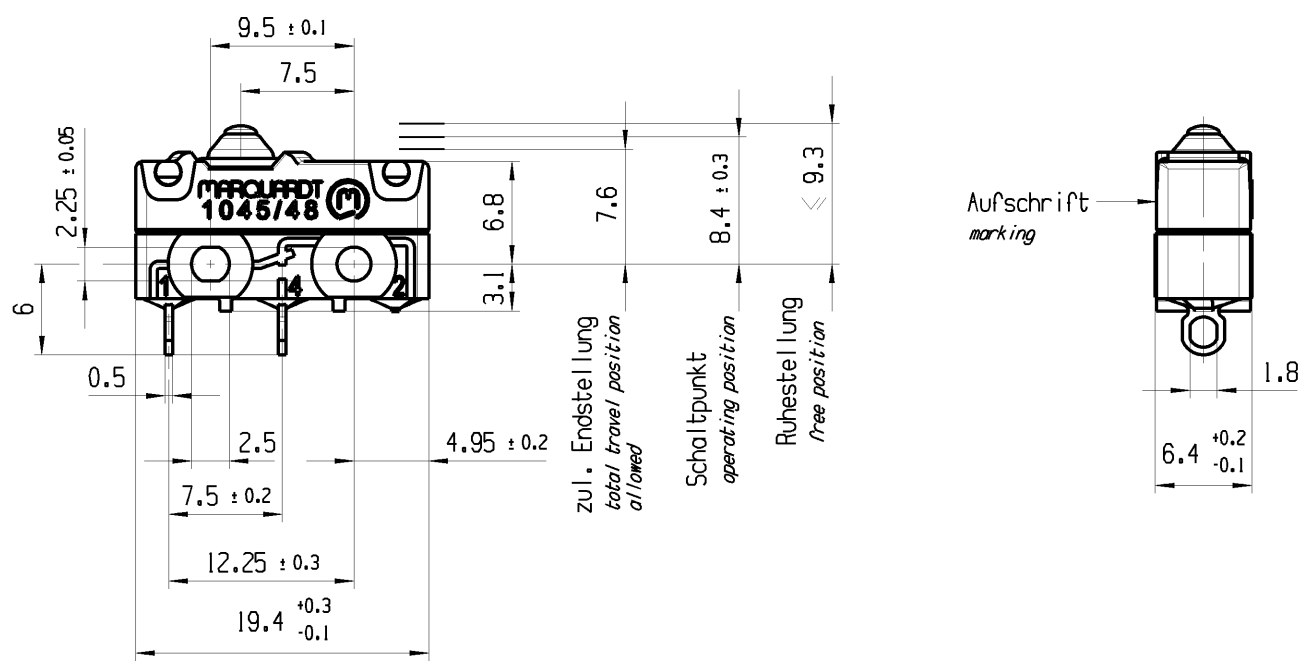

Aufschrift
Marking

1045.0122 μ

2(11)/250~40T100 100E3 15 RU

Herstellort/-jahr/-monat/-tag nach DIN EN 60062
place, year, month and day of production acc. to DIN EN 60062

G: Konform nach IEC 60335-1:2001 Kap. 30
G: matching IEC 60335-1:2001 clause 30

Schliesser 1-polig
single pole normally open

Schaltbetaetigungskraft ≤ 2.6 N
actuating force

Rueckschaltkraft ≥ 0.7 N
release force

Differenzweg ≤ 0.2 mm
movement differential

IP Schutzklasse nach EN 60529 IP 67
protection class acc to EN 60529 IP 67

fuer Form und Lage FOR SHAPE AND LOC.		⊙ = 0.1	Allgemeintoleranzen UNTOLERANCED DIMENSIONS					Pause COPY	Blatt SHEET 01		TYP K	Zeichn./DRAWING NO. 10450122	Index b
			PROJEKTION ⊥ ⊕	Abmasse und Nennmassbereiche Angaben in mm ALL DIMENSIONS ARE IN MILLIMETRES	0-6 ± 0.1 ± 0.2 >6-15 ± 0.15 ± 0.3 >15-30 ± 0.2 ± 0.5 >30-70 ± 0.3 ± 10% >70-120 ± 0.4 ± 10% >120 ± 0.8 ± 10%	Laenge LENGTH	Radien RADII						
fuer Winkel FOR ANGLE ± 2		+0.25 10 +0.1 1-0.25						Original Din A4		Massstab SCALE 2:1			
									0 10 20 30mm		SCHNAPPSCHALTER		
									CAD: NX V6.0		Snap action switch		
b	78489	30.05.12	BRC						gez./DRAWN BY 20.04.11 BRC		Ⓜ MARQUARDT		
a	77237	13.02.12	BRC						gepr./CHECKED BY				
	73338	26.05.11	BRC						Ersatz fuer/REPLACEMENT OF				
Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY		Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY							