

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -





ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	23JUN2015	DW	CW


NOTES:
1. TECHNICAL CHARACTERISTICS:
HOUSING MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: POWDER COATED, GREY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
下壳材料: 铝合金
表面处理: 粉末涂层, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

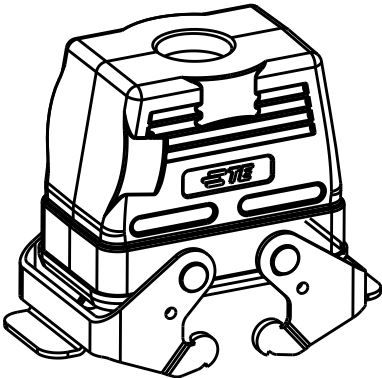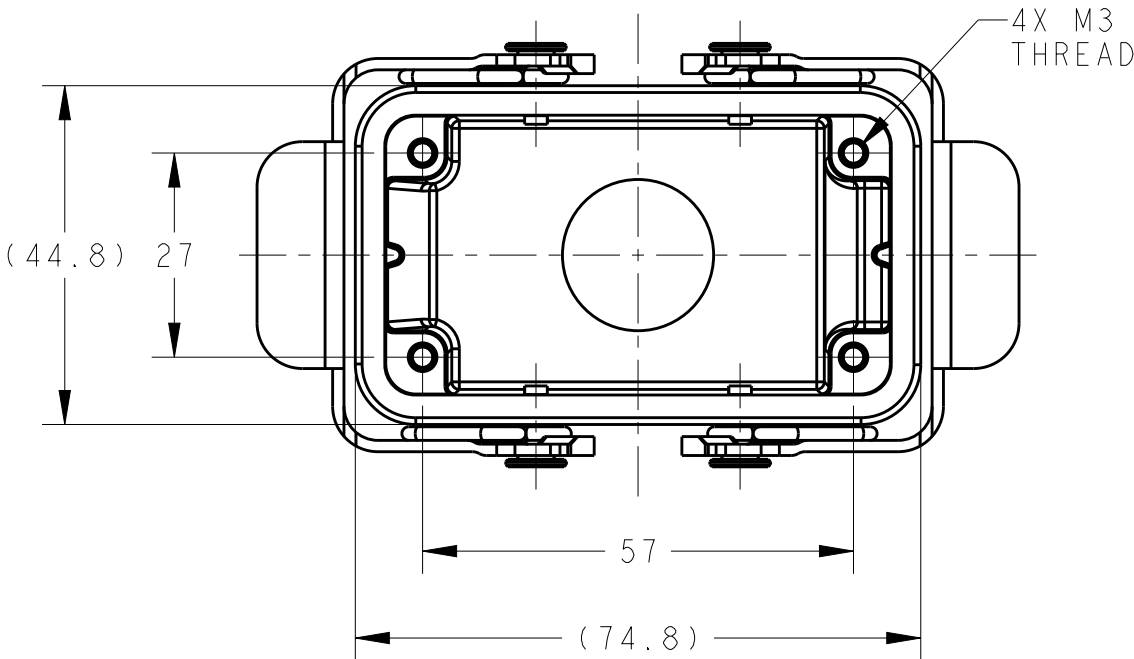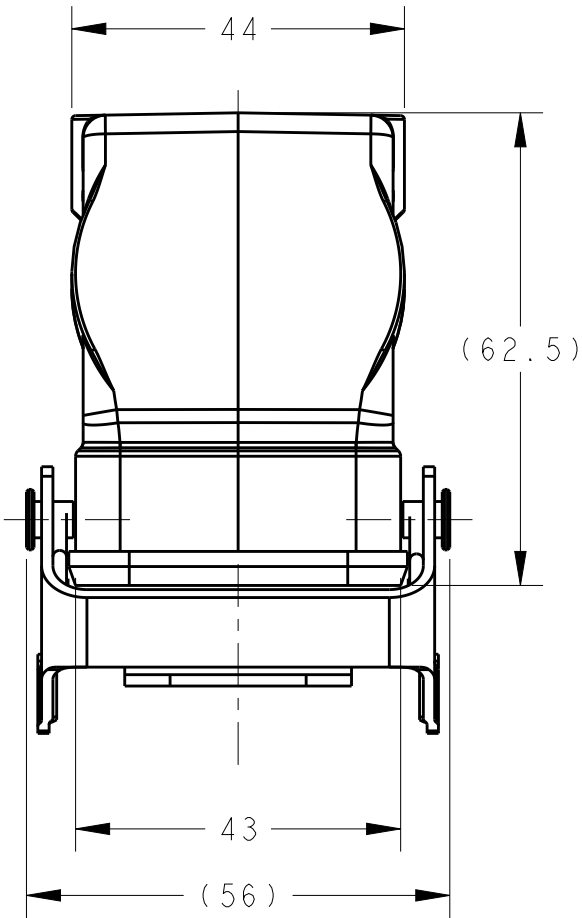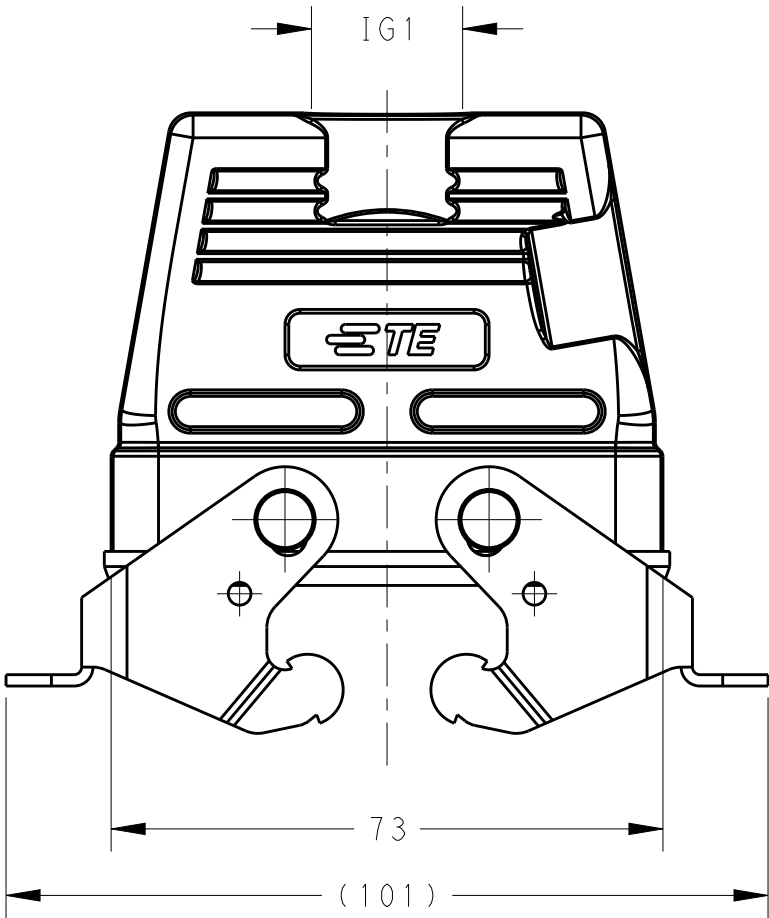

SCALE 1:2

T1710102116-000	H10B-TBF-PG16	PG16
T1710102120-000	H10B-TBF-M20	M20
T1710102125-000	H10B-TBF-M25	M25
PART NUMBER	DESCRIPTION	IG1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 23JUN2015	 TE Connectivity						
DIMENSIONS: mm		CHK Chris Wang 23JUN2015	NAME H10B-TBF-M/PG						
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Xiang Xu 23JUN2015							
		PRODUCT SPEC 108-137013	SIZE A3			CAGE CODE 00779	DRAWING NO C-T17101021XX000	RESTRICTED TO -	
		APPLICATION SPEC 114-137013							
		0 PLC ±-		Customer Drawing			SCALE 1:1	SHEET 1 OF 1	REV A
		1 PLC ±-							
2 PLC ±-									
3 PLC ±-									
4 PLC ±-		WEIGHT -							
ANGLES ±-									
MATERIAL -		FINISH -							
-		-							