

5

4

3

2

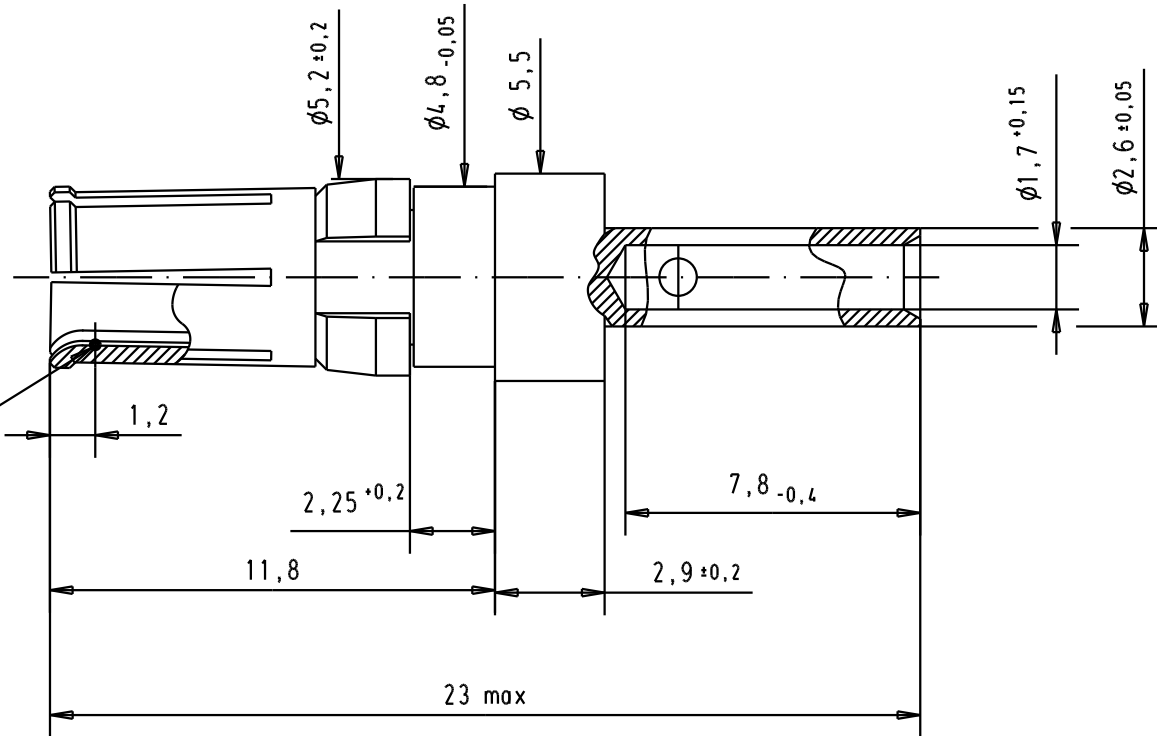
1

D

C



B

Point of plating thickness measurement



Crimping tool: 09 99 000 0509
positioner: 09 99 000 0504

A

| | | | | | | | | | | | |
|-------------|------------------|-----------|-------|----------|------|-------------------------------|---------|----------|------|---|--|
| | | | | | | | | | | | |
| | | | | | | | Detail. | Dat. | Name | | Moßstab/ Scale |
| 09691827420 | Mating area | 0.2 µm Au | | | | | Insp. | 14/04/04 | JH |  All Dim. in mm Orig. Size DIN A 4 | Female High power contact, 10A, straight cable termination, crimp for AWG 16-20 5:1 |
| | Termination area | 0.2 µm Au | | | | Stand. | | | | | |
| 09691825420 | Mating area | 0.8 µm Au | 32809 | 21/04/05 | AL | HARTING EURL F-95972 Paris | | | |  | TB 09 69 182 x420 1 Sub. |
| | Termination area | 0.2 µm Au | 31887 | 14/04/04 | JH | | | | | | |
| Part number | Plating | | Mod. | Dat. | Name | | | | | | |

Blatt/ Page
1 / 1