


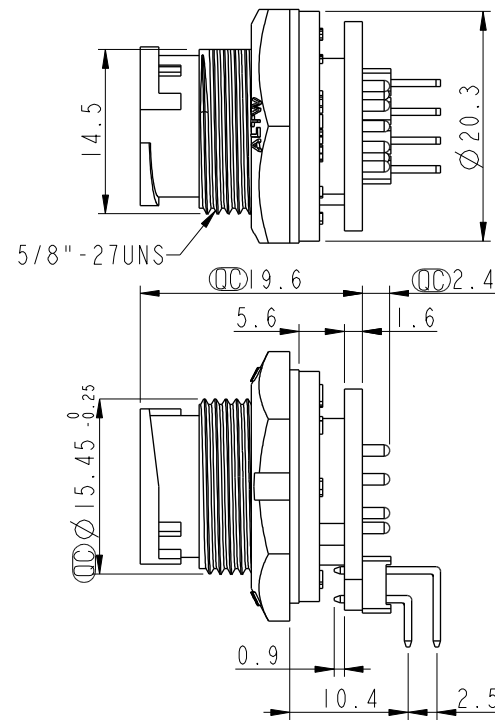


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1730307	2017/03/21	Ruru	Change Logo
D	C190273	2019/03/06	Ruru	Modify Note




- Note:
- * (QC) Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * PCB: FR4 EPOXY Glass
 - * Wafer: PH=2.54 雙排, 90°
 - * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.0mm
 - * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.5mm
 - * Gasket and Nut are packed separately

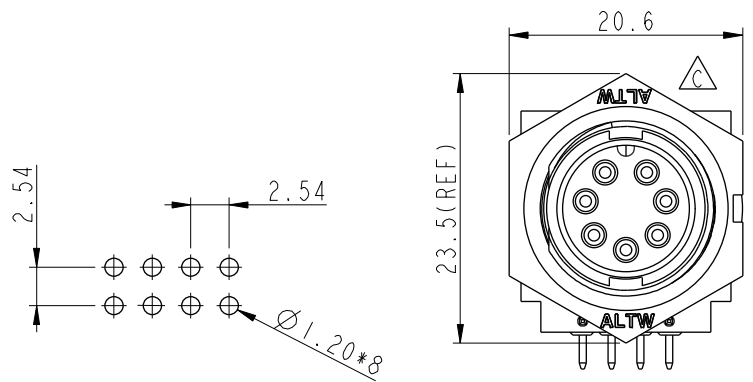


7 Pin Male Connector
Male Pin PCB Layout



Pin Assignments
Front View

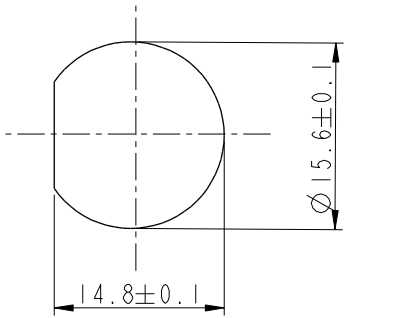

Recommended Panel Cut-out

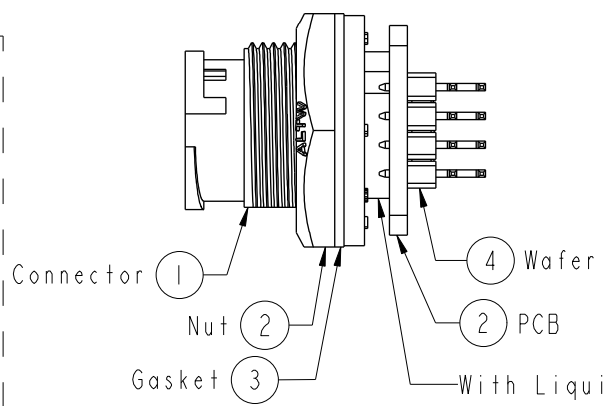

UNIT:mm		TITLE Circular Panel Lock 7Pin M Conn M Pin For R/A		ITEM NO BD-07PMMR-LC7001		DRAWN BY Ruru		DATE 2019-03-06	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1		DWG NO BD-07PMMR-LC7001		CHECKED BY Rita		DATE 2019-03-06	
REV. D		WC-REV. A.3		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-06	
		SHEET 1 OF 1							
		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司