
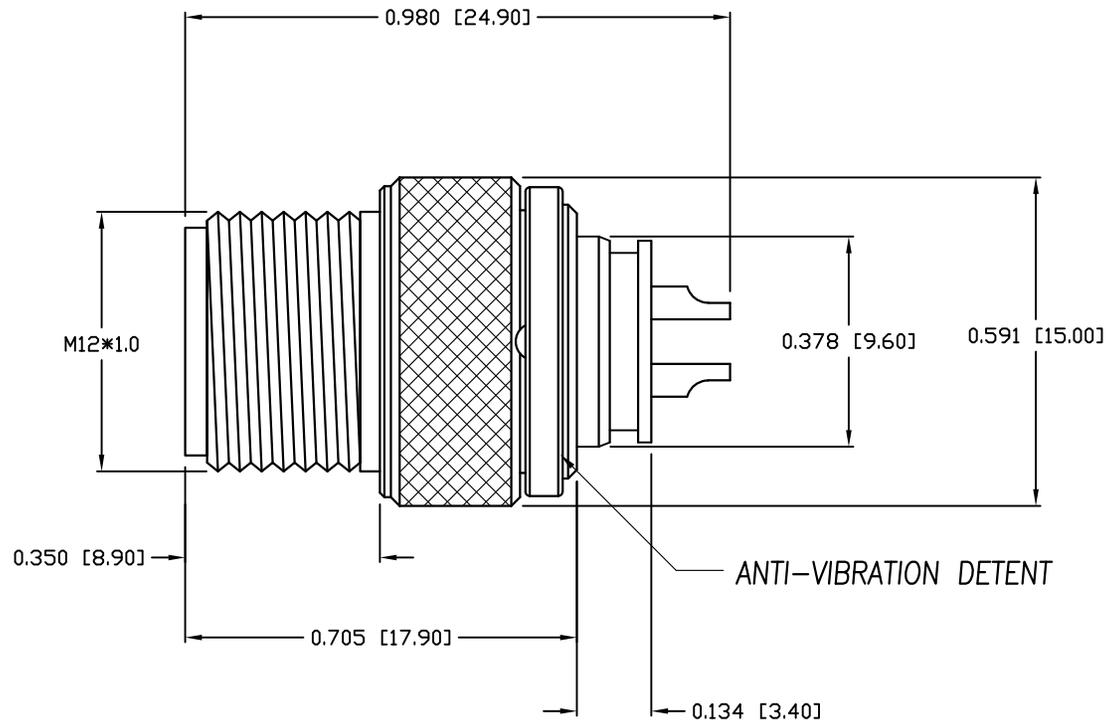


DESCRIPTION: M12 MALE - CABLE MOUNT - SOLDER CUP - 4 POS. - HIGH VIBRATION

NOTE:

MATERIAL  
 HOUSING: PA66 UL94V-0, BLACK  
 CONTACT: BRASS  
 NUT: BRASS  
 FINISH  
 CONTACT: 10 $\mu$  GOLD  
 OVER 50 $\mu$  NICKEL  
 NUT: NICKEL PLATED  
 60 $\mu$  TO 100 $\mu$  OVER ALL  
 ELECTRICAL  
 RATED CURRENT: 4A  
 RATED VOLTAGE: 250V  
 INSULATION RESISTANCE: 100 M $\Omega$ hms MIN.  
 CONTACT RESISTANCE: 10 m $\Omega$ hms MAX.  
 WATER PROOF: IP67  
 ENVIRONMENT  
 OPERATION TEMPERATURE: -40°C TO +105°C  
 MAX WIRE AWG: 22 AWG

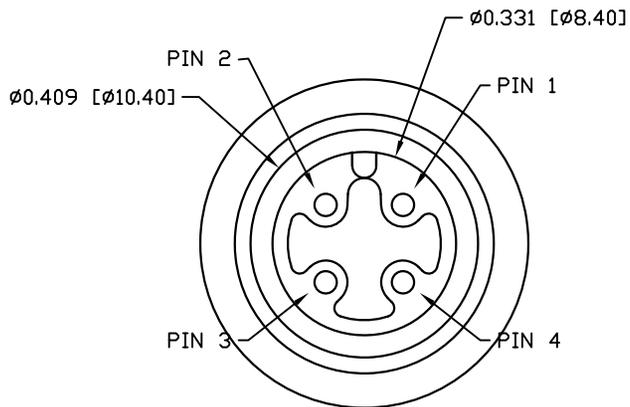

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON

DATE: 08-04-16

NorComp

SCALE: N.T.S.

SHEET 1 OF 1

REV 2

DWG NO. 858VA04-103RLU4