

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20







© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	14JAN2016	DL	CW
	AI	ECR-16-001653	03FEB2016	DL	CW

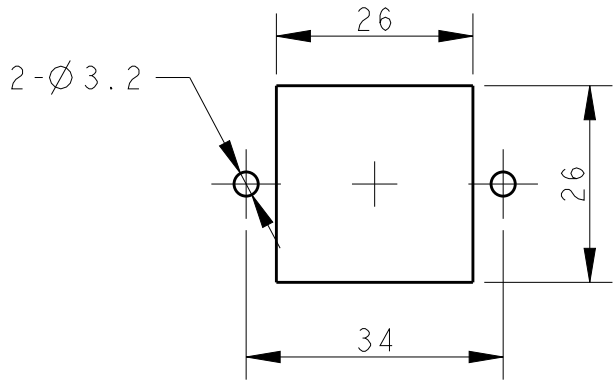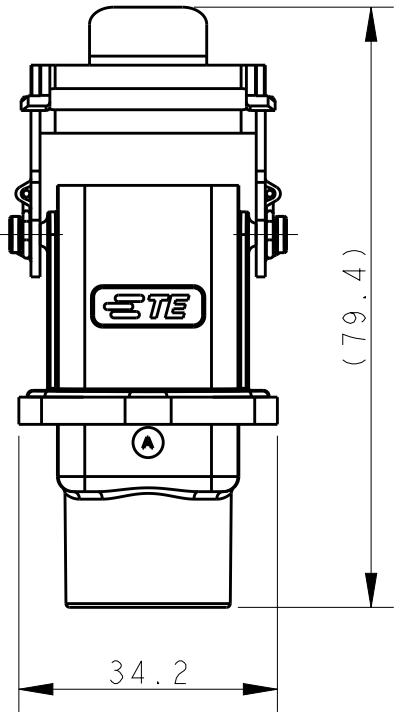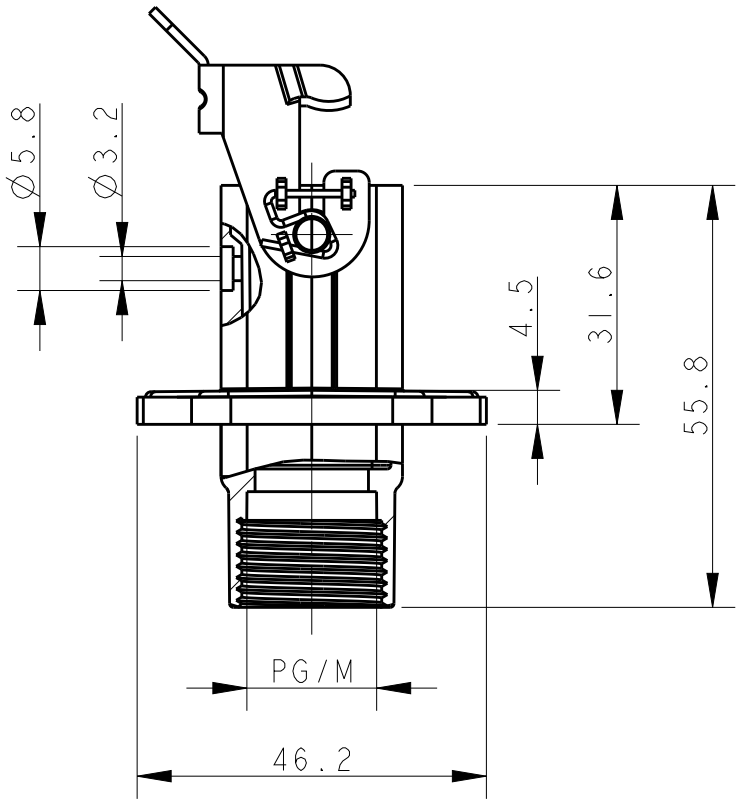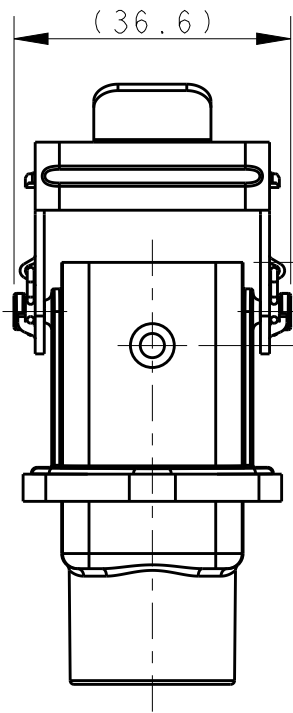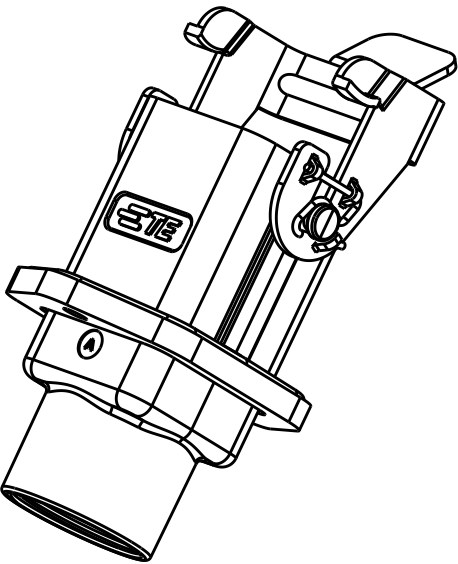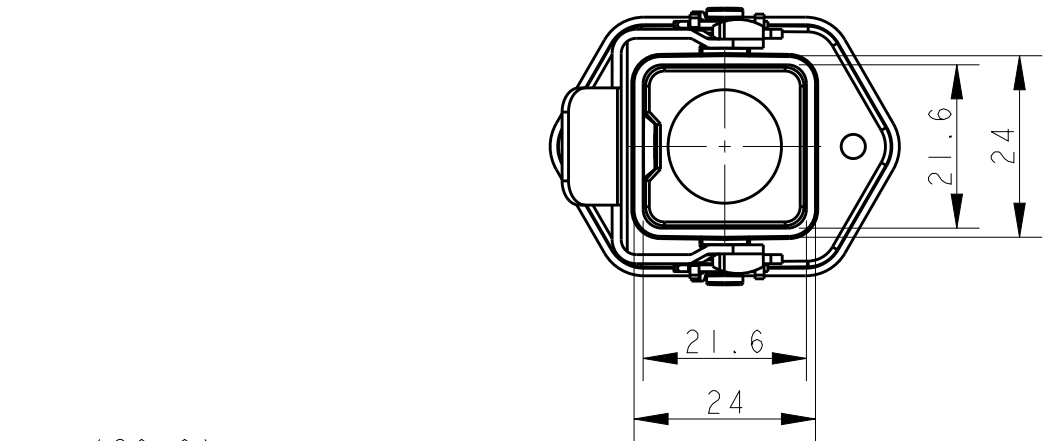



PANNEL CUT OUT

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ZINC ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 锌合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

T1509033111-000	H3A-MAG-PG11 H3A 开孔安装下壳 PG11	PG11
T1509033120-000	H3A-MAG-M20 H3A 开孔安装下壳 M20	M20
PART NUMBER 料号	PART DESCRIPTION 描述	PG/M PG/M螺纹孔

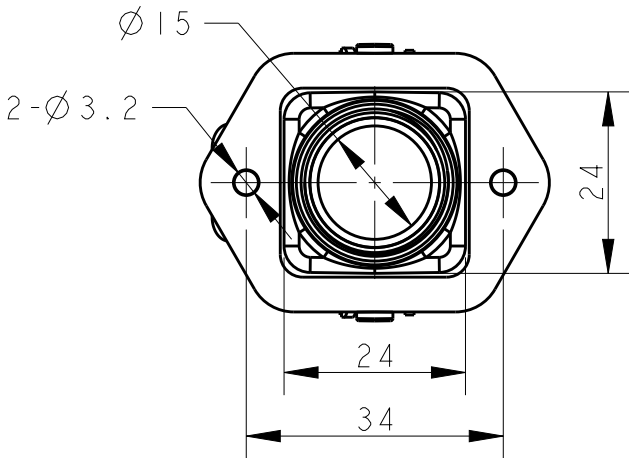

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 14JAN2016	 TE Connectivity		
DIMENSIONS: mm		CHK CHRIS WANG 14JAN2016			
		APVD XU XIANG 14JAN2016			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-137170			
MATERIAL		APPLICATION SPEC 114-137012	NAME H3A-MAG-PG/M		
FINISH		WEIGHT	SIZE A3	CAGE CODE -	DRAWING NO C-T15090331XX000
-		Customer Drawing	SCALE 1:1	SHEET 1	OF 1
-				REV AI	