




TOP VIEW



SIDE VIEW

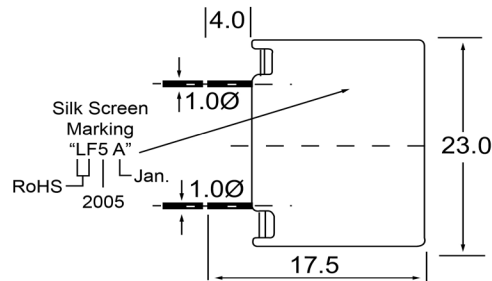

BOTTOM VIEW



Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date	Approved		
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S		
Resonant Frequency	400	(Hz)								
Rated Voltage	12	(V)								
SPL @ 10cm	81	(dBA)								
Tone	Single									
Mount Type	Thru-hole									
Voltage Range	9 ~ 15	(V)								
Max Rated Current	25	(mA)								
Housing Material	ABS									
Operating Temperature	-10 ~ +60	°C								
Storage Temperature	-10 ~ +60	°C								
Weight	10	(g)								
					Drawn by	Date	Checked by	Date	Approved by	Date
					A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
				Electro-Mechanical Indicator			IE230412-1			