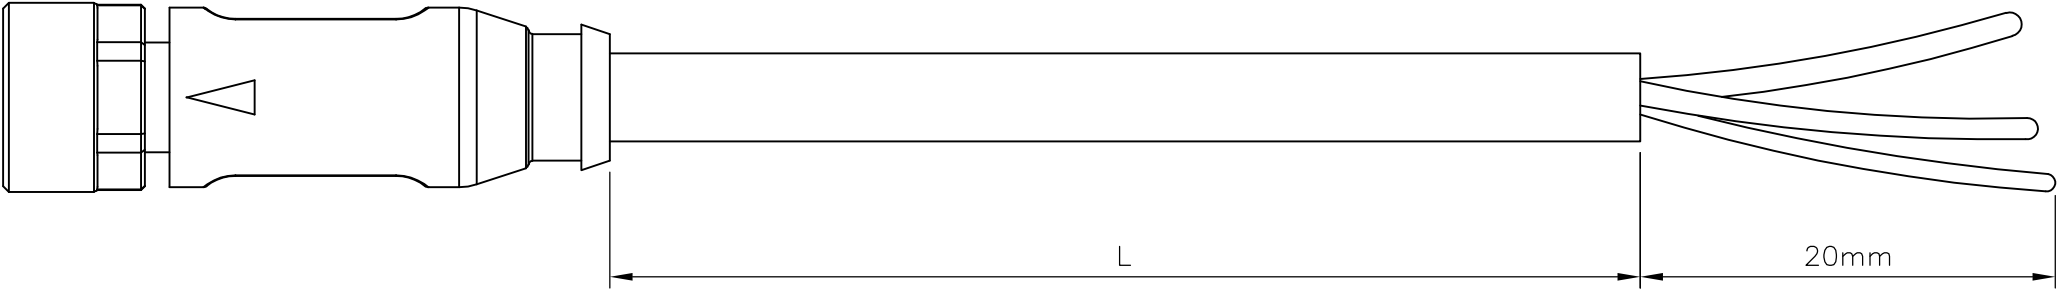


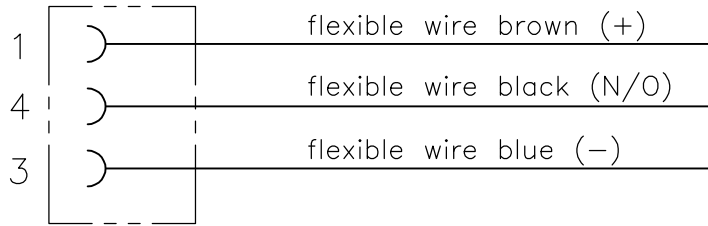



4		3		2		1							
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST		REVISIONS					
© COPYRIGHT — By —		ALL RIGHTS RESERVED.		H		—		P	LTR	DESCRIPTION	DATE	DWN	APVD
NOTES:									A	INITIAL RELEASE	12NOV2013	GSK	BvH
Tolerances cable lengths:									A1	ECR-14-011671	14AUG2014	GSK	BvH
0m to 0.5m +30mm													
0.5m to 1.0m +50mm													
1.0m to 3.0m +100mm													
< 3.0m +1.5%													
A →												VIEW 'A'	
TECHNICAL DATA													
Operating voltage		max. 60 V AC/DC											
Operating current per contact		max. 4 A											
Locking of ports		Screw thread M8 x 1 mm (recommended torque 0.4 Nm) self-securing											
Protection		IP65 and IP67 when plugged and screwed down (EN 60529)											
PUR CABLE													
No./diameter of wires		3 x 0.25 mm²											
Wire isolation		PP (br, bl, bk)											
C-track properties		5 million											
Jacket		PUR (UL/CSA)											
Outer diameter		approx. 4.1 mm											
Bend radius (moving)		10 x outer diameter											
Temperature range (fixed)		-40...+80 °C											
Temperature range (mobile)		-25...+80 °C											
PVC CABLE													
No./diameter of wires		3 x 0.25 mm²											
Wire isolation		PVC (br, bl, bk)											
C-track properties		5 million											
Jacket		PVC (UL/CSA)											
Outer diameter		approx. 4.5 mm											
Bend radius (moving)		10 x outer diameter											
Temperature range (fixed)		-30...+80 °C											
Temperature range (mobile)		-5...+80 °C											
Contact Layout Female													
Schematic diagram													
3 pos		10mtr		PVC		Black		1-2273001-4		3x22AWG PVC 10.0m		8	
3 pos		5mtr		PVC		Black		1-2273001-3		3x22AWG PVC 5.0m		7	
3 pos		3mtr		PVC		Black		1-2273001-2		3x22AWG PVC 3.0m		6	
3 pos		1.5mtr		PVC		Black		1-2273001-1		3x22AWG PVC 1.5m		5	
3 pos		10mtr		PUR		Black		2273001-4		3x22AWG PUR 10.0m		4	
3 pos		5mtr		PUR		Black		2273001-3		3x22AWG PUR 5.0m		3	
3 pos		3mtr		PUR		Black		2273001-2		3x22AWG PUR 3.0m		2	
3 pos		1.5mtr		PUR		Black		2273001-1		3x22AWG PUR 1.5m		1	
LENGTH		MATERIAL		JACKET COLOR		TE PN		DESCRIPTION		ITEM			
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12NOV2013 SATHISH KUMAR .G		CHK 12NOV2013 B.VELDHoven		APVD 12NOV2013 A.VAN ZANDVOORT		NAME		M8 X 1.0 STRAIGHT SOCKET PIGTAIL			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO	
		0 PLC ± -		108-19483		114-32127		A3		00779		C-2273001	
MATERIAL -		FINISH -		WEIGHT -		CUSTOMER DRAWING		SCALE NTS		SHEET 1 OF 1		REV A1	