


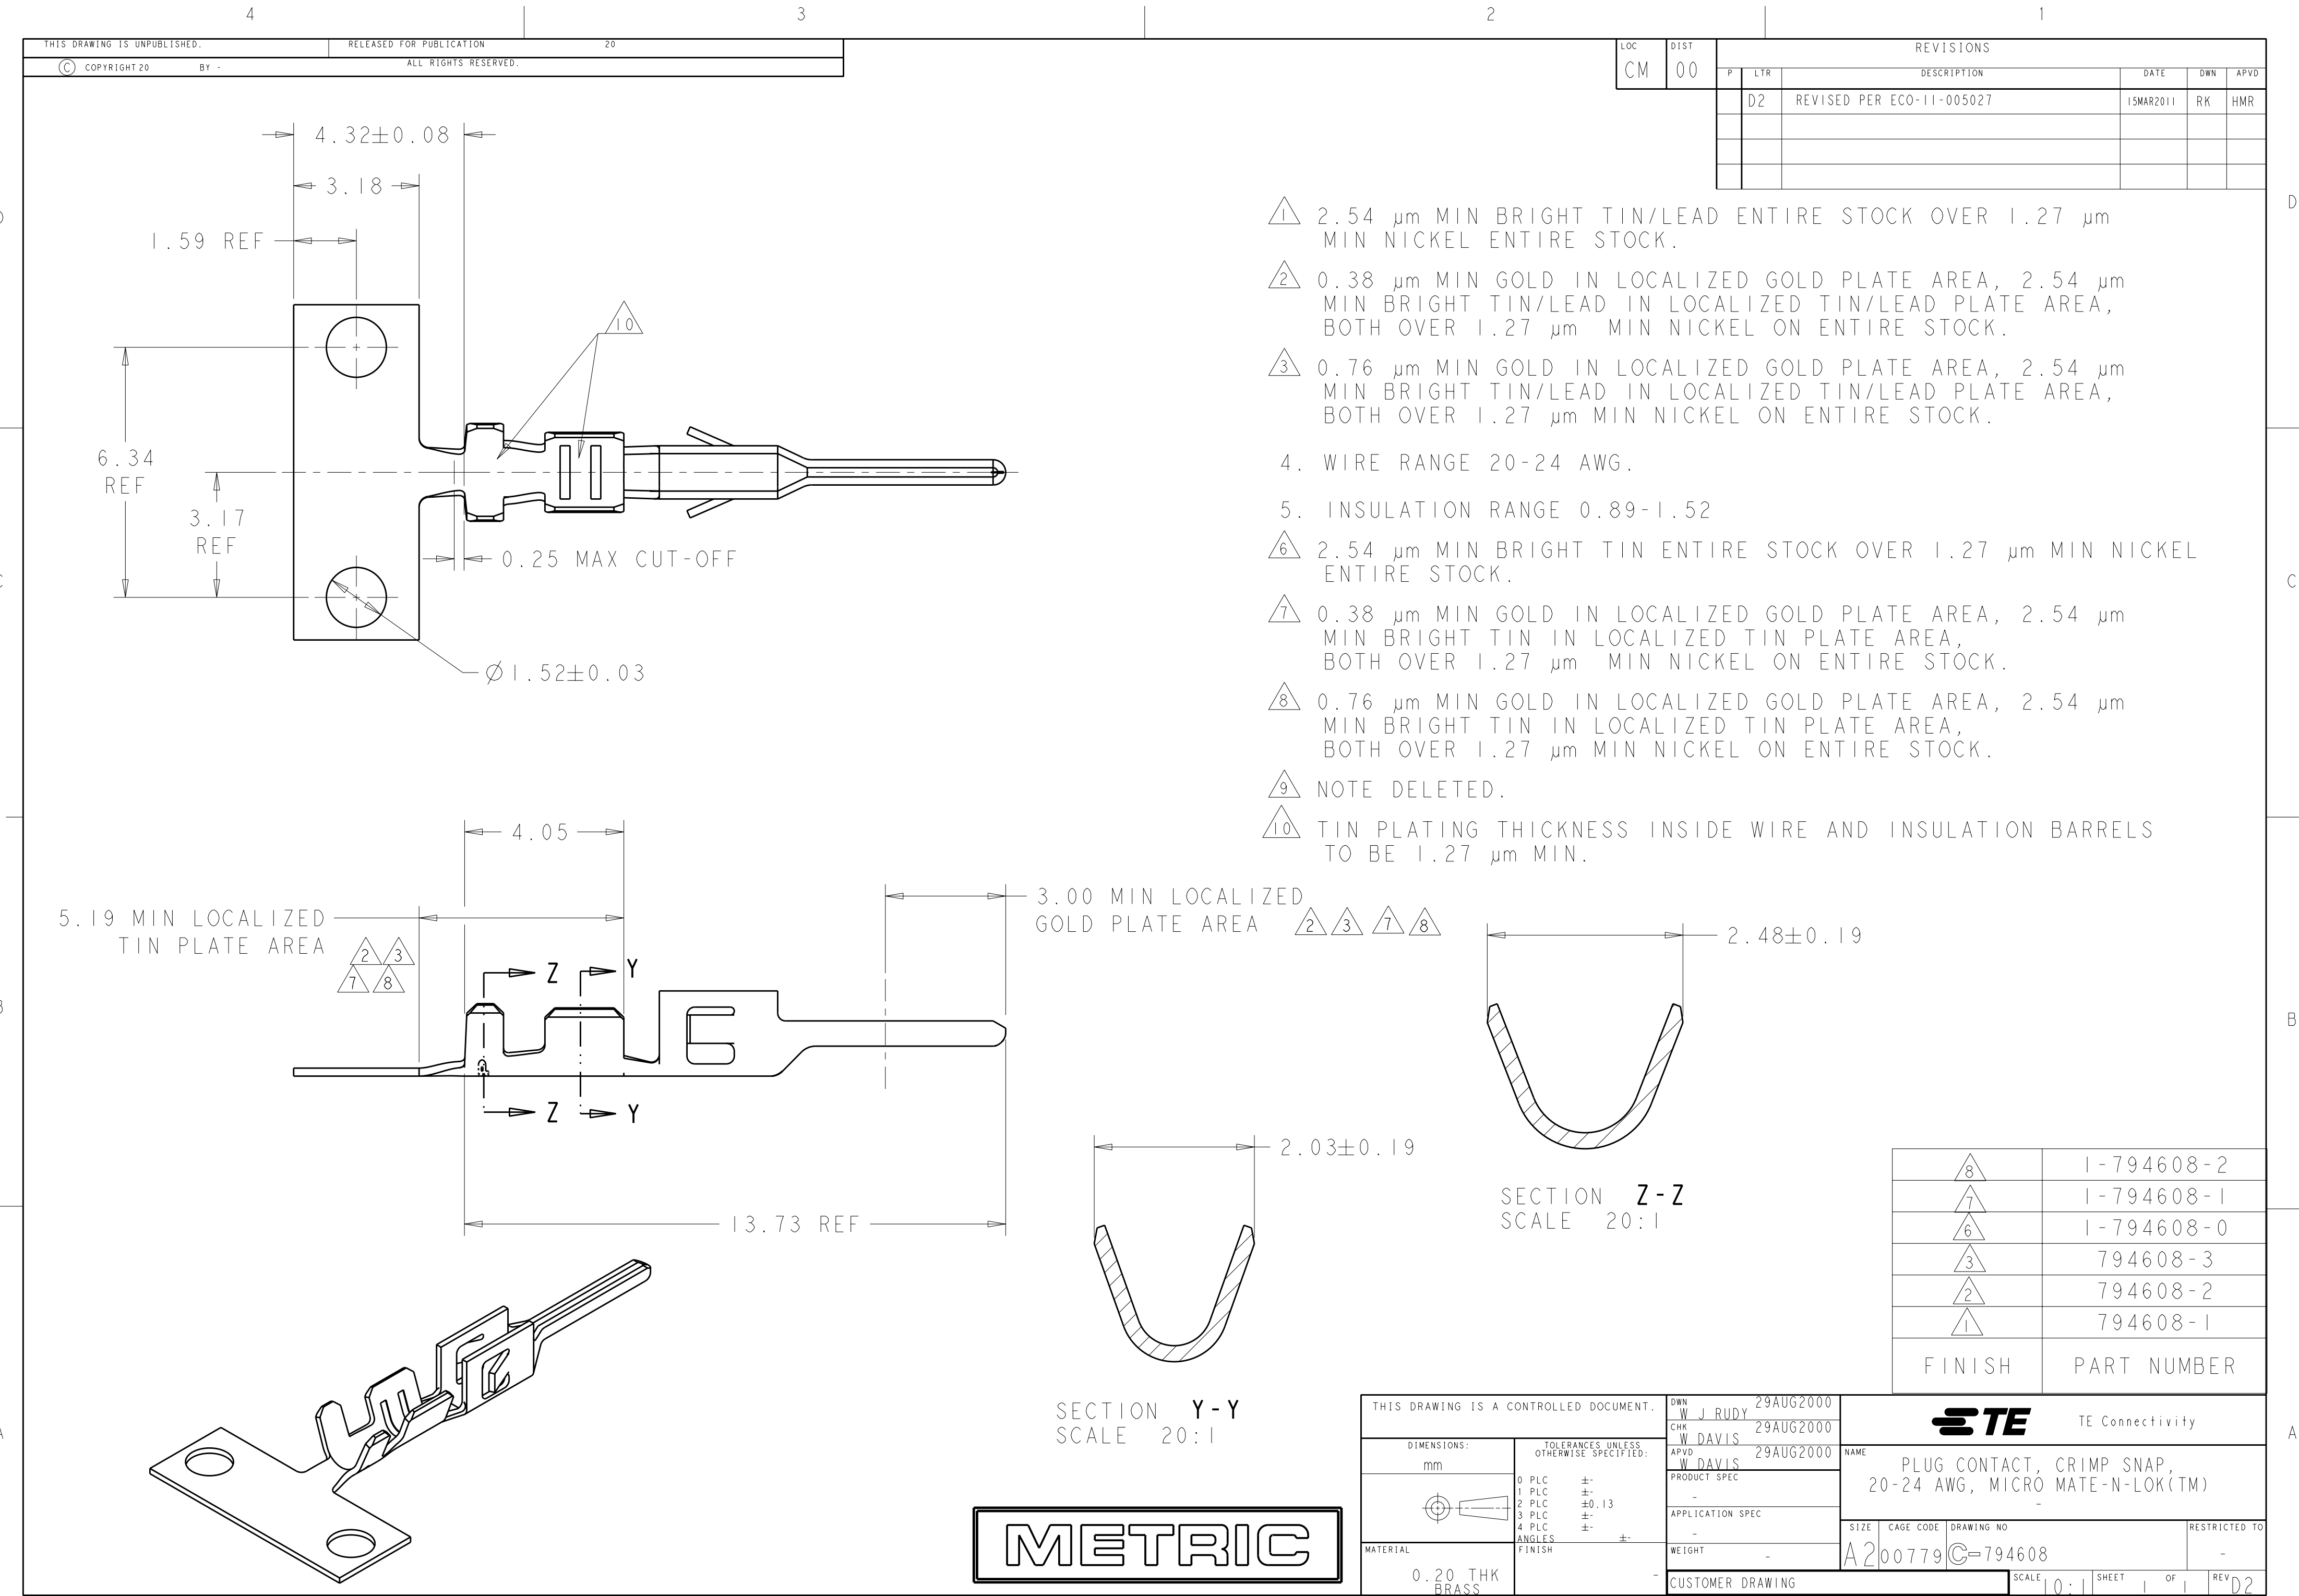

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20	
COPYRIGHT 20		BY -		ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D2	REVISED PER ECO-11-005027	15MAR2011	RK	HMR

1 2.54 μm MIN BRIGHT TIN/LEAD ENTIRE STOCK OVER 1.27 μm MIN NICKEL ENTIRE STOCK.

2 0.38 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54 μm MIN BRIGHT TIN/LEAD IN LOCALIZED TIN/LEAD PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.

3 0.76 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54 μm MIN BRIGHT TIN/LEAD IN LOCALIZED TIN/LEAD PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.

4. WIRE RANGE 20-24 AWG.

5. INSULATION RANGE 0.89-1.52

6 2.54 μm MIN BRIGHT TIN ENTIRE STOCK OVER 1.27 μm MIN NICKEL ENTIRE STOCK.

7 0.38 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54 μm MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.

8 0.76 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54 μm MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.

9 NOTE DELETED.

10 TIN PLATING THICKNESS INSIDE WIRE AND INSULATION BARRELS TO BE 1.27 μm MIN.

8	1-794608-2
7	1-794608-1
6	1-794608-0
3	794608-3
2	794608-2
1	794608-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	W J RUDY	29AUG2000
		CHK	W DAVIS	29AUG2000
		APVD	W DAVIS	29AUG2000
DIMENSIONS:		PRODUCT SPEC		
mm		APPLICATION SPEC		
		WEIGHT		
MATERIAL		CUSTOMER DRAWING		
0.20 THK BRASS				

TE Connectivity		NAME		PLUG CONTACT, CRIMP SNAP, 20-24 AWG, MICRO MATE-N-LOK(TM)	
		SIZE		CAGE CODE	
		DRAWING NO		RESTRICTED TO	
		A200779		C-794608	
		SCALE		SHEET	
		10:1		OF	
				REV	
				D2	

SECTION Y-Y
SCALE 20:1

SECTION Z-Z
SCALE 20:1

METRIC

1471-9 (3/11)

Pro/ENGINEER DRAWING