



Customer drawing

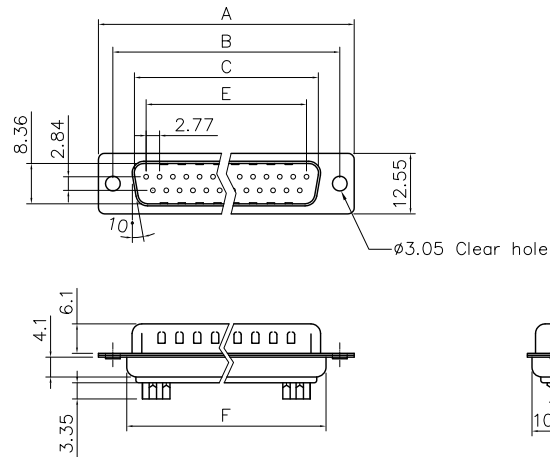

Dimensions

Positions	A	B	C	E	F
9	30.81	24.99	16.92	11.08	19.20
15	39.20	33.30	25.25	19.39	27.70
25	53.04	47.04	38.96	33.24	41.10
37	69.40	63.50	55.42	49.86	57.30

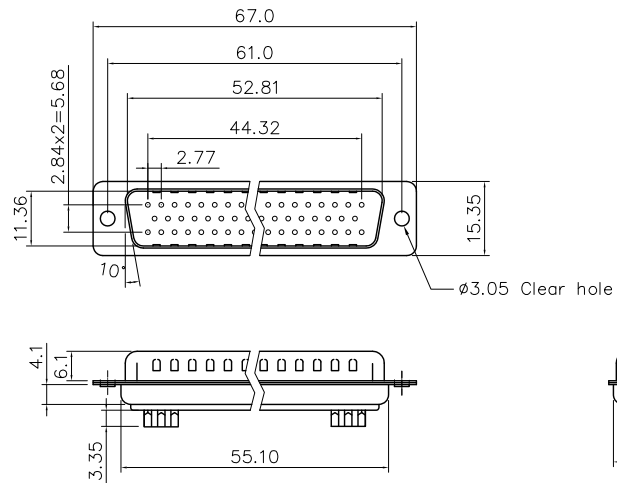

50 Positions



REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	03/20/08	IP
2	HK--	Update the drawing	12/26/11	IP
3	HK--	Update the drawing	04/11/12	IP
4	HK--	Update the drawing	06/20/14	IP

D-SUB TECHNICAL DATA

SHELL : Steel 100u" tin over 50u" min nickel over 50u" min copper
BODY : Glass-Filled Thermoplastic PBT, UL94V-0
CONTACTS : Copper Alloy
Gold flash over 50u" min nickel on mating area
100u" min tin over 50u" min nickel on solder area
ELECTRICAL: Voltage rating : 250 V Rms 60Hz
Current rating : 3A
Withstanding Voltage >1000 V Rms 60Hz for 1 minute
Insulation resistance >1000 M Ohms
Contact resistance 20 mOhms max.
MARKING : Amphenol...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 717 SD X XX P

L: RoHS Compliance

717: Tinned shell
+dimples for plug

SD: Standard density

Contact Type:
P=pin

Configuration:
09,15,25,37,50

Shell Size:
E,A,B,C,D

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE
U.S.	METRIC	DRAWN	Feix.Liu 06/20/14
.X. +/-	0.38	CHECKED	Tony.Tang 06/20/14
.XX +/-	0.25	CHECKED	
.XXX +/-	0.13		
FRACTIONS +/-	3'		
ANGLES +/-			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :	
REMOVE SHARP EDGES		ANGLE OF PROJECTION	
DIMENSIONS			
U.S.	INCHES		
METRIC	MM		

Amphenol

Amphenol East Asia Limited

TITLE

Stamped and formed contact,SD series

SIZE	DRAWING NO.	REV.
A4	L717SDXXXXP	4
SCALE	SHEET 1 OF 1	
NONE		