
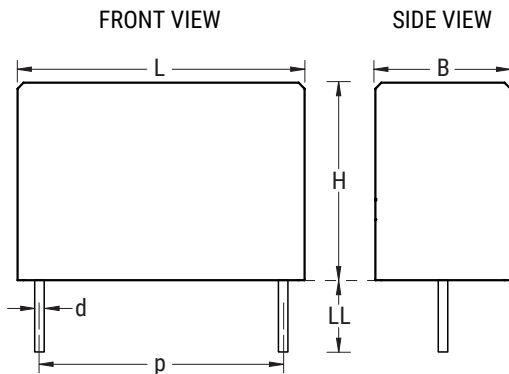


Sample Kit Contents

KEMET Part Number	Capacitance Value (μF)	Dimensions in mm			Lead Spacing (p)	Resistance (Ω)	Quantity
		B	H	L			
P409QM473M275AH470	47	7.3	13.0	18.5	15.2	47	10
P409QM473M275AH101	47	7.3	13.0	18.5	15.2	100	10
P409CE104M275AH220	0.1	7.6	14.0	24.0	20.3	22	10
P409CE104M275AH101	0.1	7.6	14.0	24.0	20.3	100	10
P409CP224M275AH220	0.22	11.3	16.5	24.0	20.3	22	10
P409CP224M275AH101	0.22	11.3	16.5	24.0	20.3	100	10
P409CP224M275AH221	0.22	11.3	16.5	24.0	20.3	220	10
P409EJ224M275AH331	0.22	12.1	19.0	30.5	25.4	330	10
P409EL474M275AH330	0.47	15.3	22.0	30.5	25.4	33	10
P409EL474M275AH221	0.47	15.3	22.0	30.5	25.4	220	10

Dimensions – Millimeters


www.kemet.com/P409

Size Code	p		B		H		L		d	
	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance	Nominal	Tolerance
QM	15.2	+/-0.4	7.3	Maximum	13.0	Maximum	18.5	Maximum	0.8	+/-0.05
CE	20.3	+/-0.4	7.6	Maximum	14.0	Maximum	24.0	Maximum	0.8	+/-0.05
CP	20.3	+/-0.4	11.3	Maximum	16.5	Maximum	24.0	Maximum	0.8	+/-0.05
EJ	25.4	+/-0.4	12.1	Maximum	19.0	Maximum	30.5	Maximum	1.0	+/-0.05
EL	25.4	+/-0.4	15.3	Maximum	22.0	Maximum	30.5	Maximum	1.0	+/-0.05

Note: See Ordering Options Table for lead length (LL) options.