

4



3

2

1

used for:

4-40 UNC

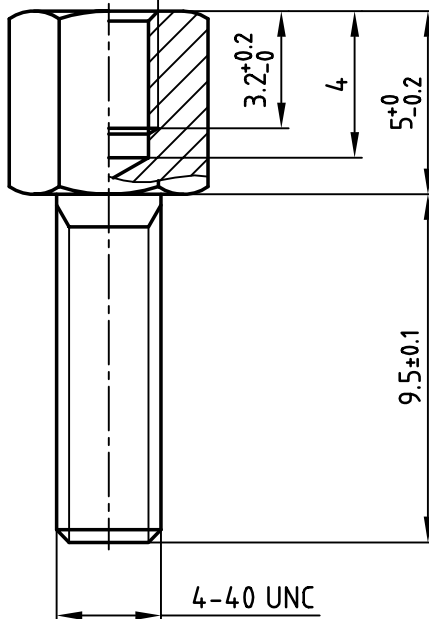

Part-No.

160X10269X-S5

160X00699A

Notes:

1. Part is splint and burrfree
2. Threaded core dimension 4-40 UNC: 2.257 ± 0.1
3. Test equipment measurement: 4-40 UNC-2B (thread inner)
4-40 UNC-2A (thread outer)

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance
ISO 2768-m

scale: 5:1

material: STAINLESS STEEL

title:

HEX BOLT
4-40 UNC / 4-40 UNC
14.5 mm long

dwg no:

CAD/ 2000

DIN-A

740FEL0A

4

sh: 1/1

product no:

SEE TABLE

4

3

2

1