


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT — BY —

REVISIONS					
P	F	ZONE	LTR	DESCRIPTION	DATE
			P1	REVISED PER ECO-11-005294	08APR11
					HMR

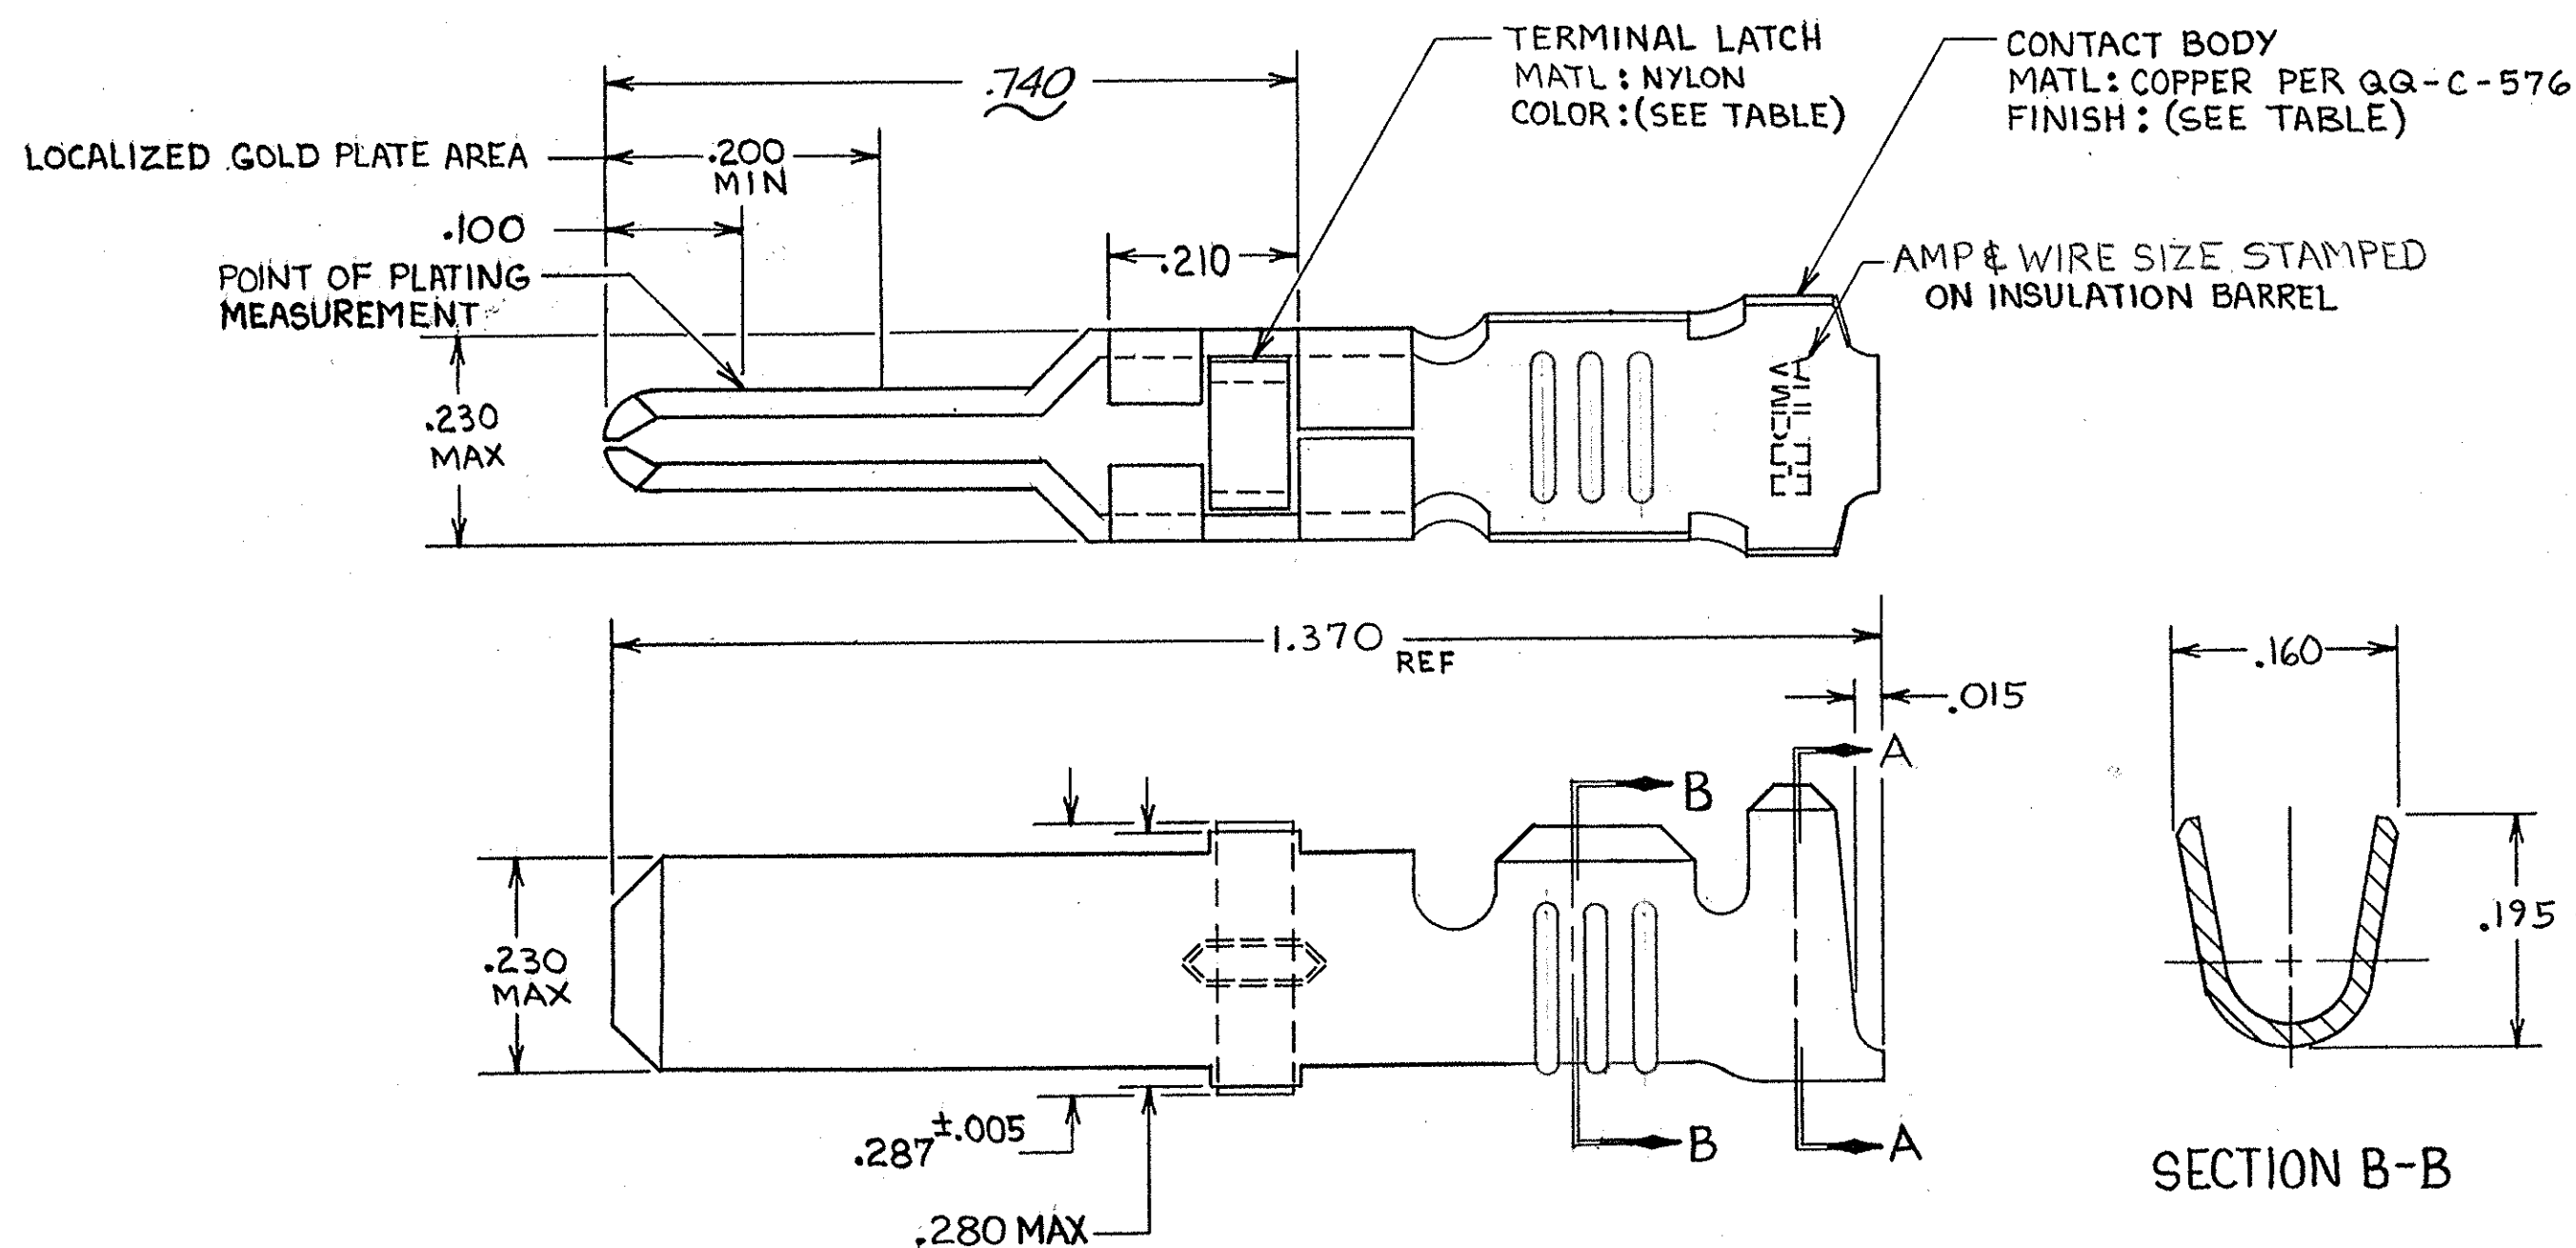

1. REELED FOR USE WITH STANDARD APPLICATORS.
2. REELED FOR USE WITH HEAVY DUTY MINI-APPLICATORS.
3. PLATED WITH .000100 MIN SILVER PER QQ-S-345.
4. PLATED WITH .000015 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA; GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.
5. PLATED WITH .000030 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA; GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.
6. PLATED WITH .000050 MIN 93-7% TIN-LEAD ALLOY OVER .000030 MIN NICKEL PER QQ-N-290.
7. WIRE RANGE = 12-16 AWG.
8. INSULATION RANGE = .140-.165 DIA.
9. PLATED TIN (NO LEAD). 0.000050 MIN THK PER ASTM-B-545 OVER NICKEL. 0.000030 MIN THK PER QQ-N-290.

TERMINAL LATCH COLOR	FINISH	STRIP ASS'Y P/N REF	STRIP ASS'Y P/N REF	LOOSE PIECE P/N REF
BLACK	4	66256-4	66256-8	66262-5
NATURAL	3		66256-6	66262-4
BLACK	4		66256-2	66262-3
BLACK	5	66256-4	66256-2	66262-2
BLACK	6	66256-5	66256-1	66262-1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ±.010 ANGLES ±.010		CONTRACT NO		TE TE Connectivity	
MATERIAL SEE CALLOUT		DR <i>Rick Rohlbaugh</i> 9-27-85			
FINISH SEE DASH NO		CHG <i>Larry G. Lawrence</i> 10-25-85			
		APPD <i>S. J. Boland</i> 10-25-85			
		APPD <i>James E. Smith</i> 10-28-85		NAME MALE TYPE XII GROUND CONTACT LOOSE PIECE ASS'Y	
		DSGN APPD		SIZE C	
		OTHER APPD		FSCM NO 00779	
				DRAWING NO 66262	
				SCALE NTS	
				SHEET	

CUSTOMER DRAWING