
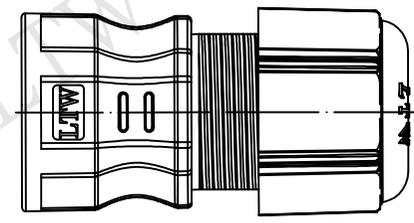
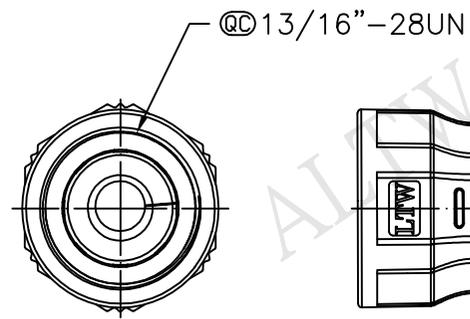
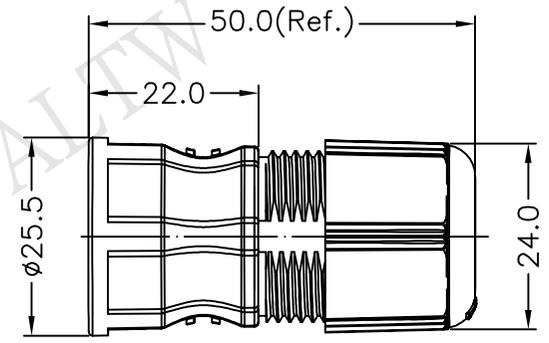
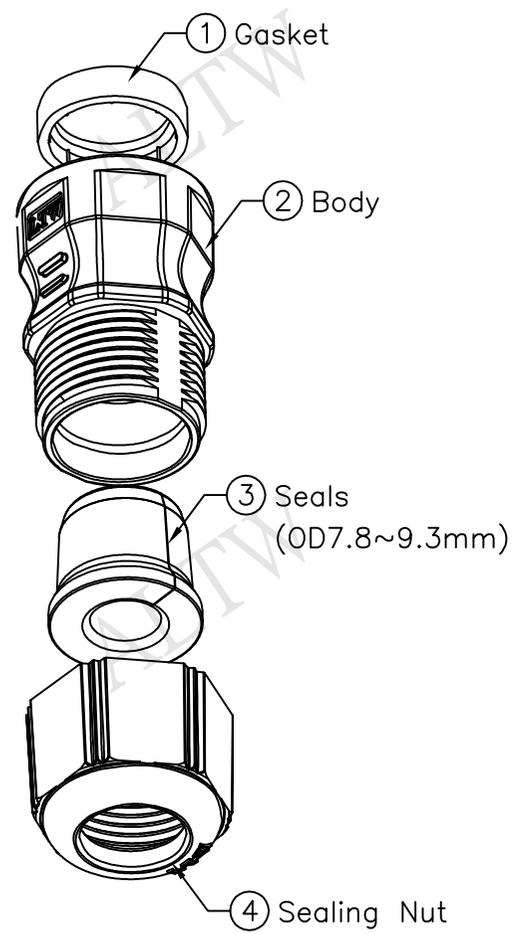


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014/06/28	Tom gu	Change Rev.1 To Rev.A



- Note:
- \* @C Important Dimension.
  - \* Waterproof Rate:IP67.
  - \* Cable OD:φ7.8~φ9.3mm.
  - \* Gasket:Silicone,Gray.
  - \* Seals:Silicone,Gray.
  - \* Body & Sealing Nut:ZDC-3,Silver.
  - \* ①②③④ 組裝後放入一個氣泡袋
  - \* ④ 零件只需鎖 2~3 牙
- (Assembly Put In One Bubble Bag)

UNIT:mm TOLERANCE ±0.5 mm	TITLE 13/16"-28UN Ass'y Metal (After Plug In)OD 7.8~9.3mm	<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司		ITEM NO CSG-CSP005	DRAWN BY Tom	DATE 2014/06/28
	SCALE Free	SHEET 1 OF 1		DWG NO CSG-CSP005	CHECKED BY Ludi	DATE 2014/06/28
REV. A	SIZE A4	@C :Inspection Item		CUSTOMER ALTW	APPROVED BY Victor	DATE 2014/06/28

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.