

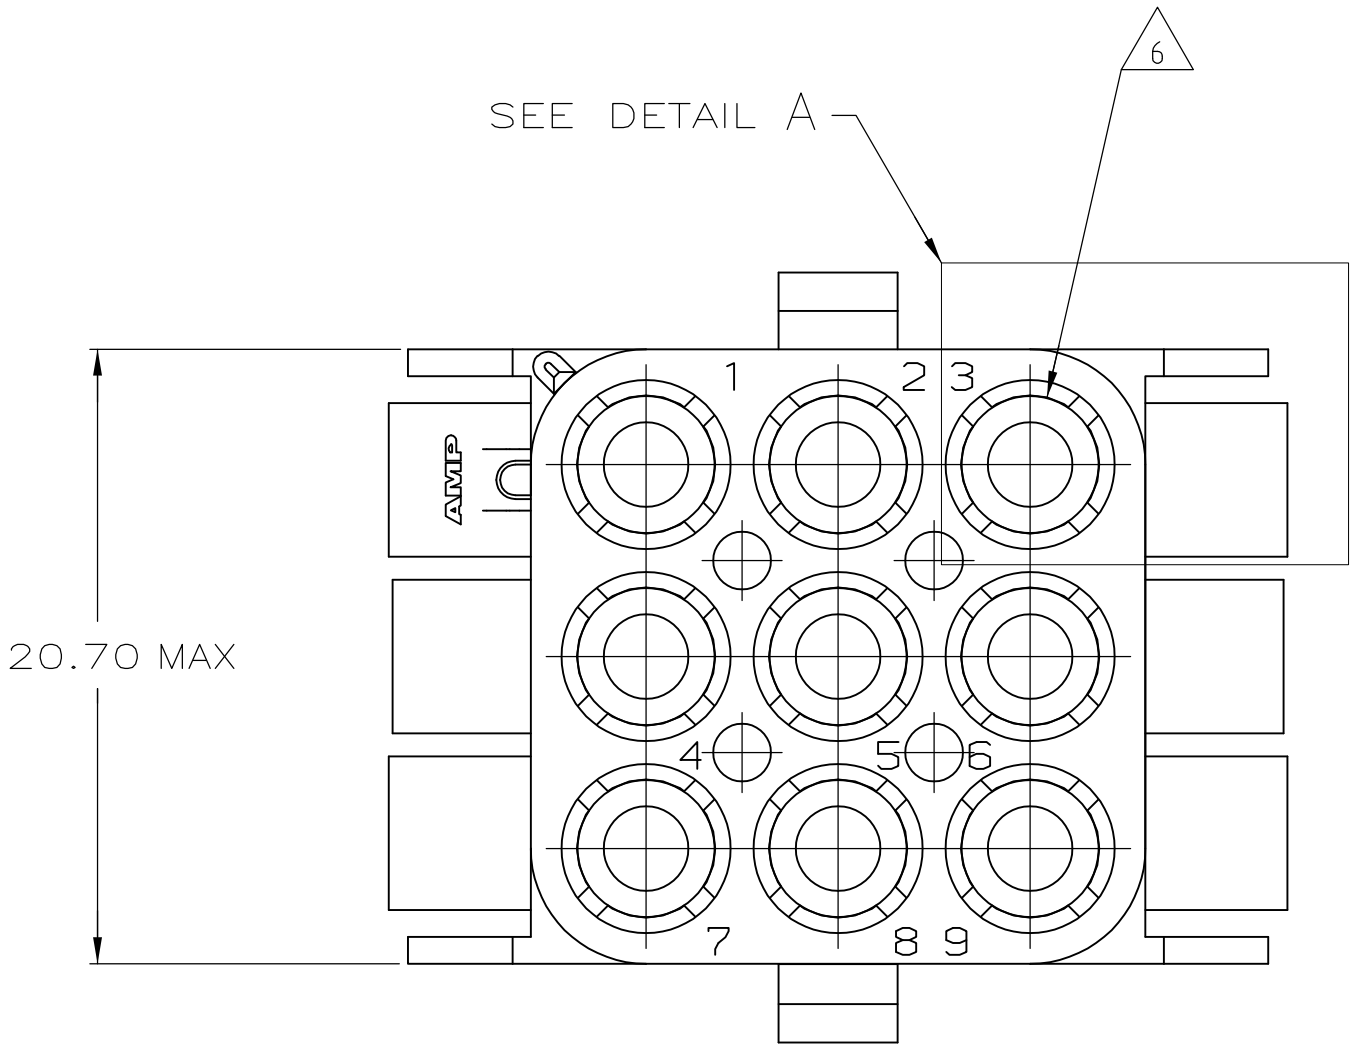
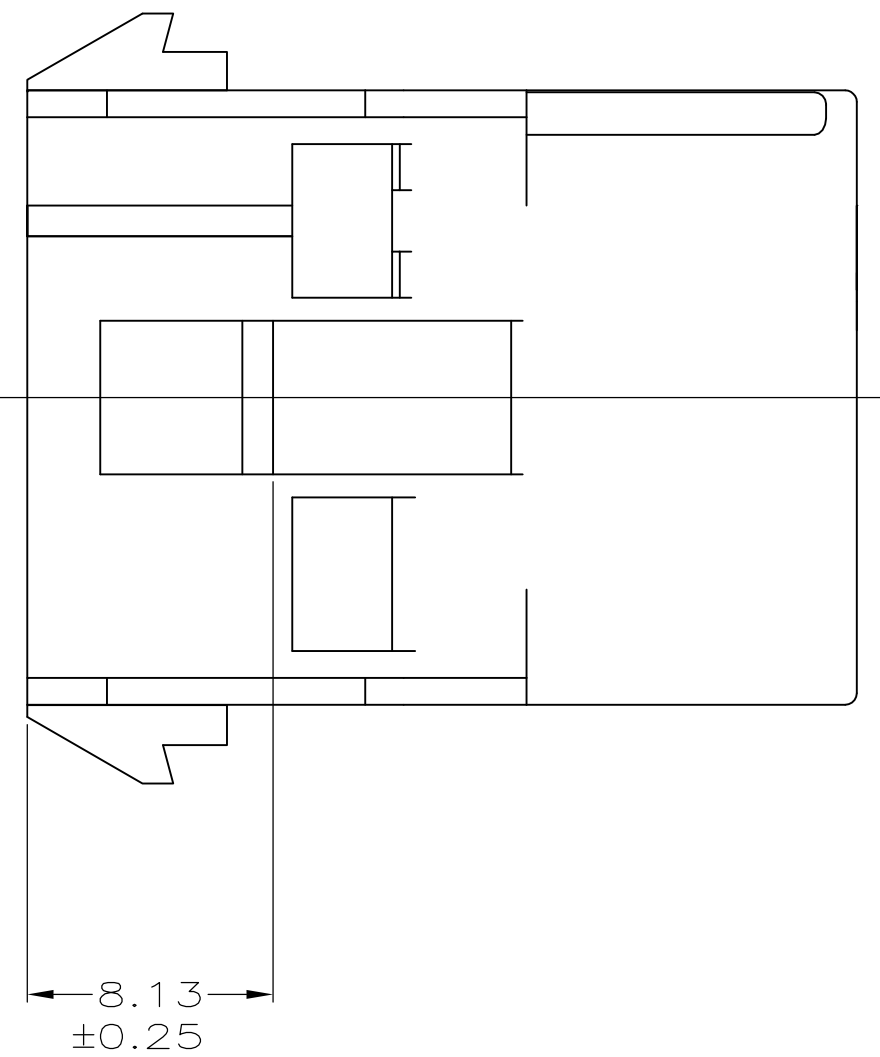
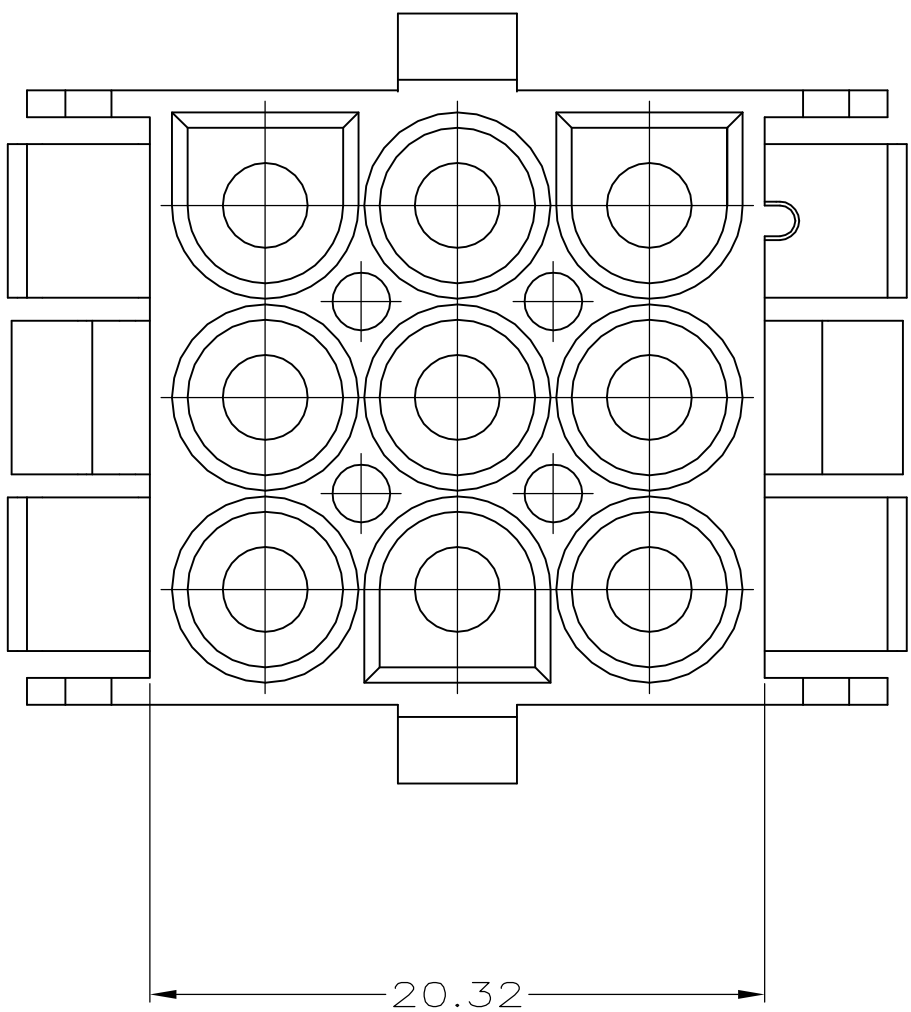
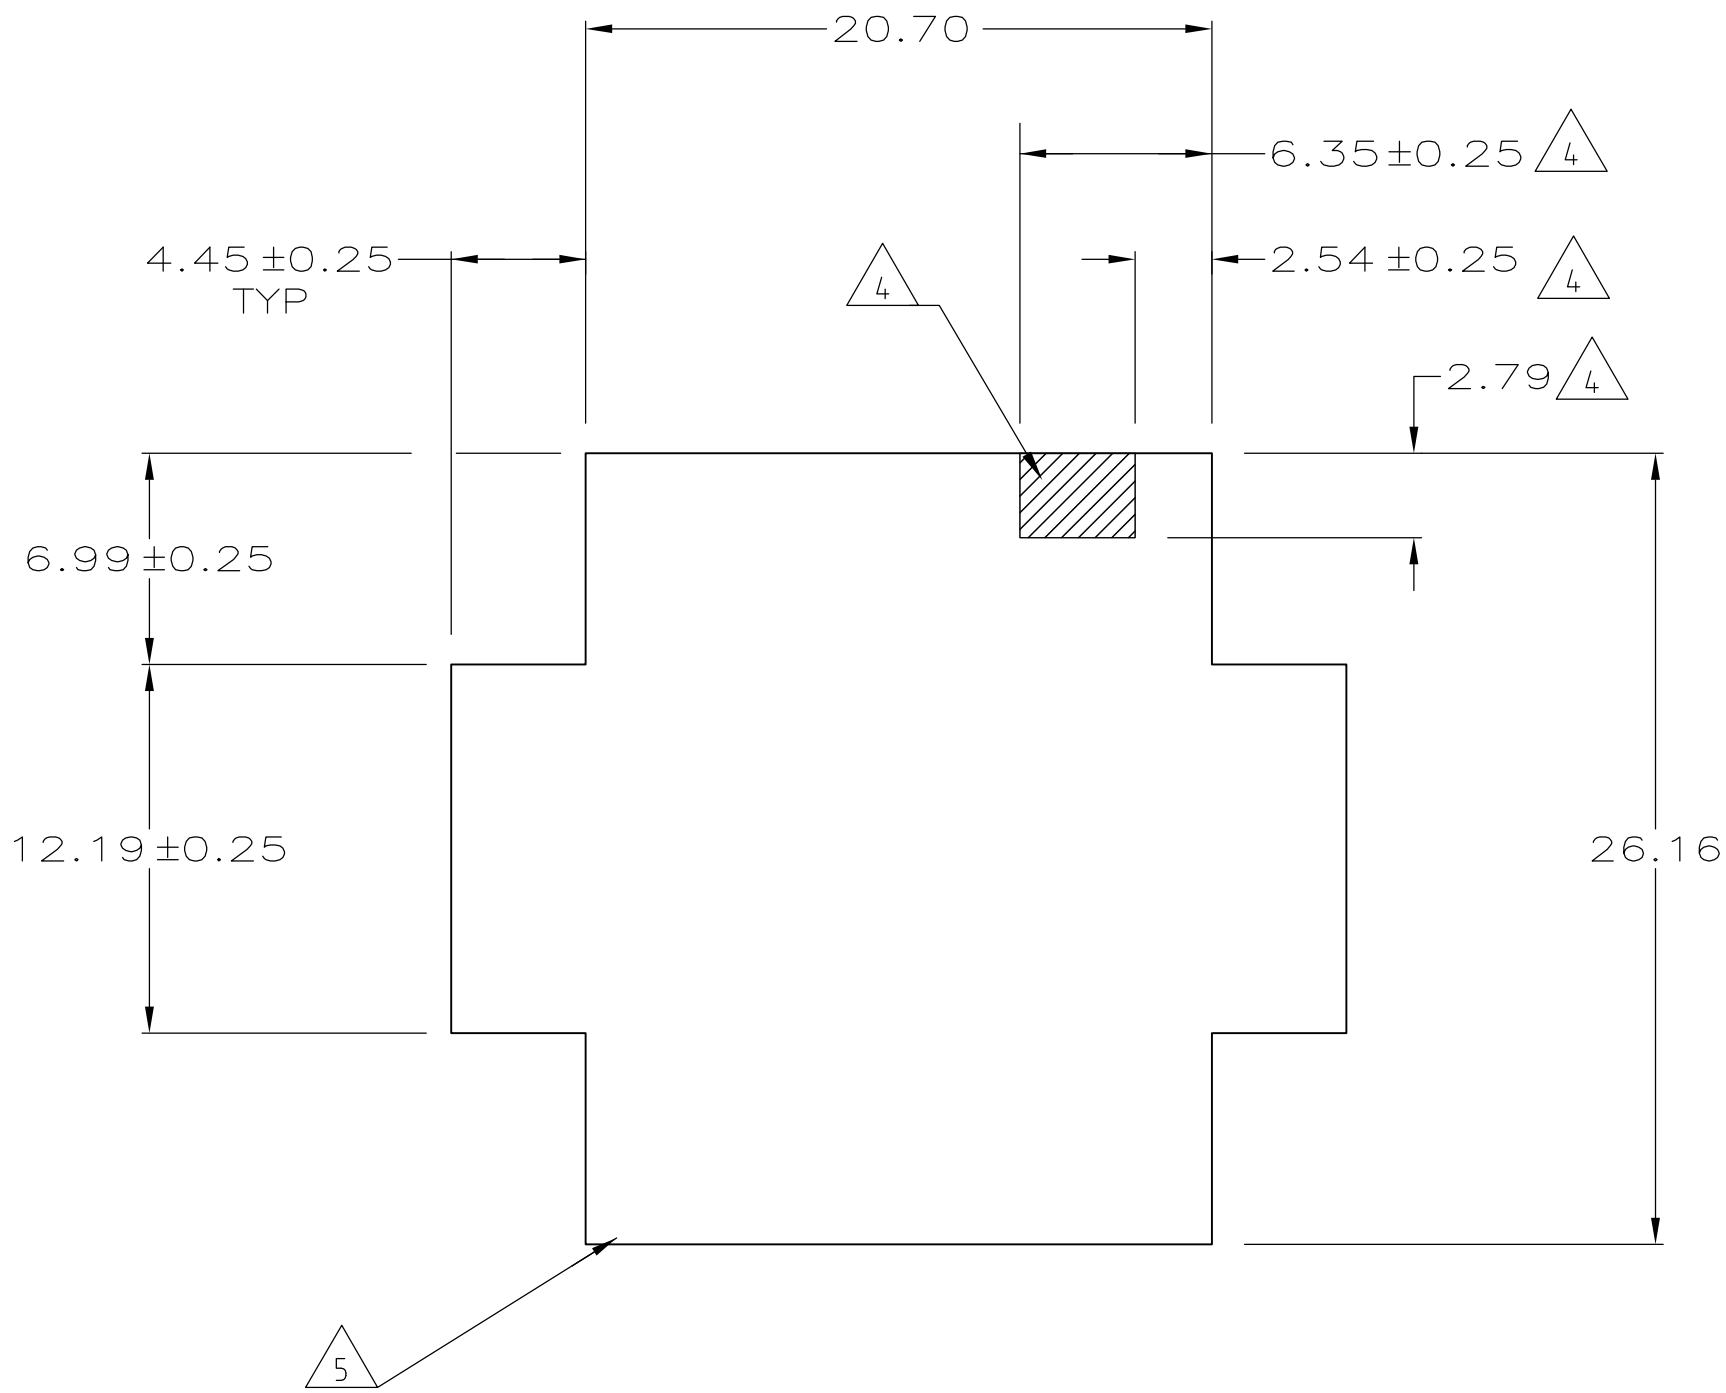



LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	DWN APVD
CM	53	A1		REVISED PER ECR-17-015922	06NOV2017	BDA KR

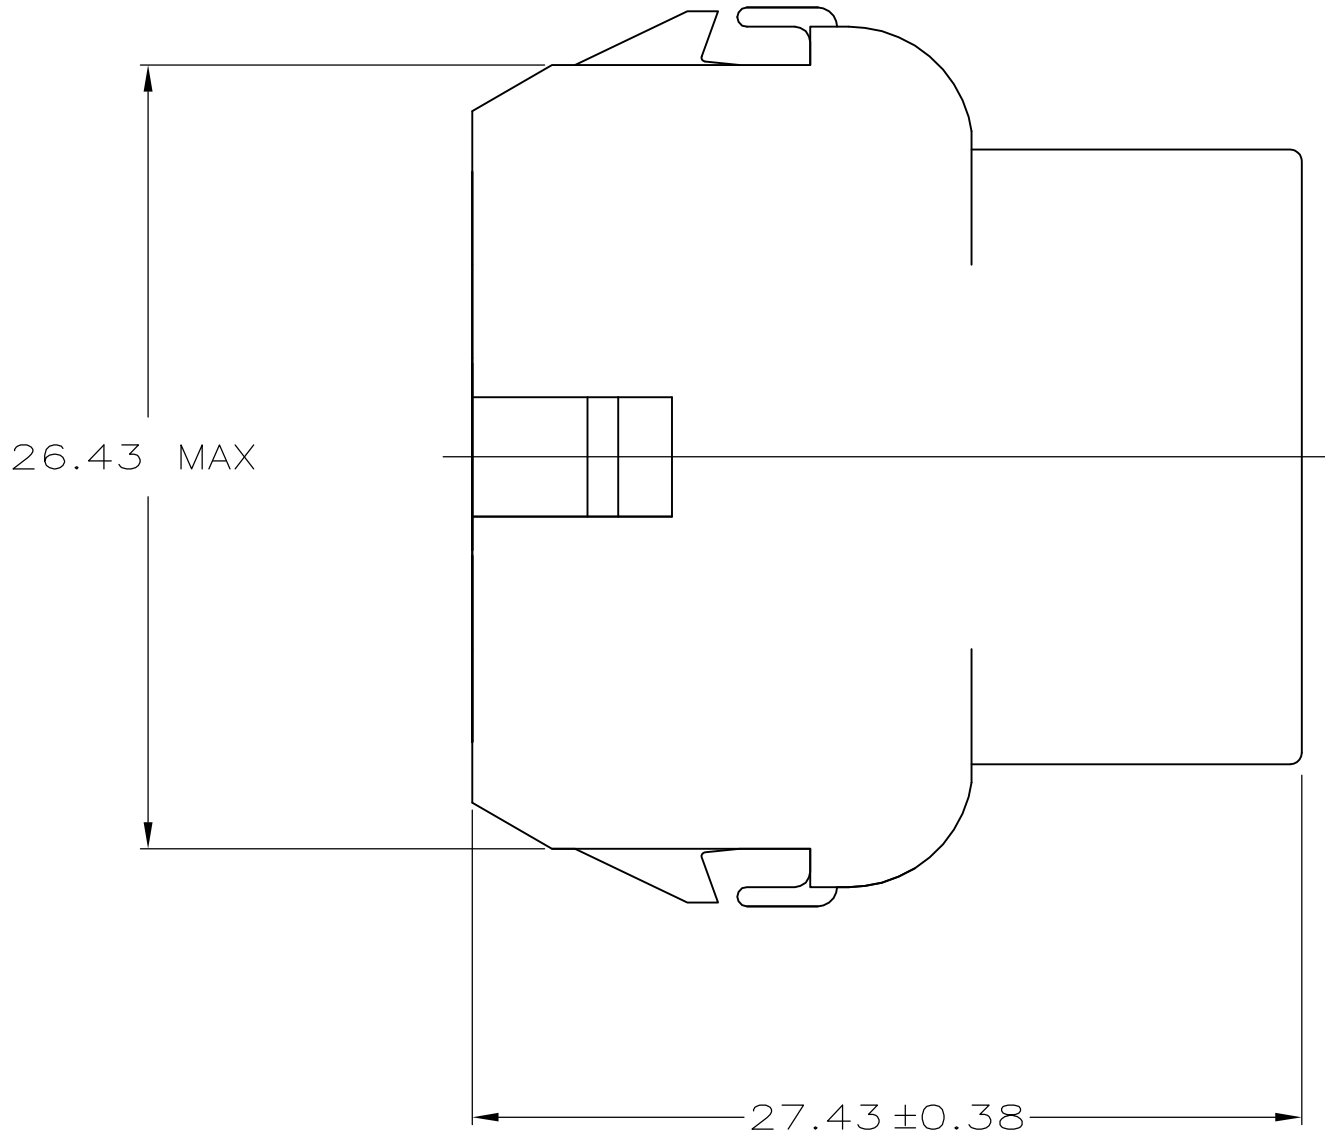

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- CIRCUIT NUMBER 1 LOCATION.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION.
SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 150° C TEMPERATURE RATING FOR THIS HOUSING IS FOR SHORT TERM DURATION.
MAX OPERATING TEMPERATURE REMAINS 125° C.
- PHOSPHOR BRONZE CONTACTS SHOULD ALWAYS BE USED WITH THIS HOUSING.
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION.
ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

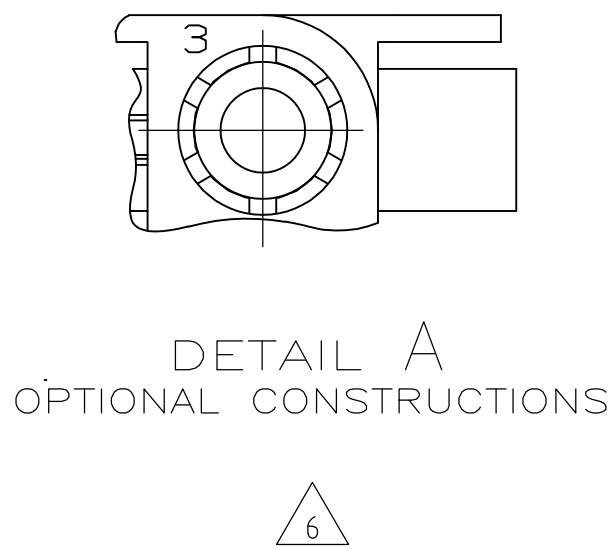

RECOMMENDED PANEL CUT OUT

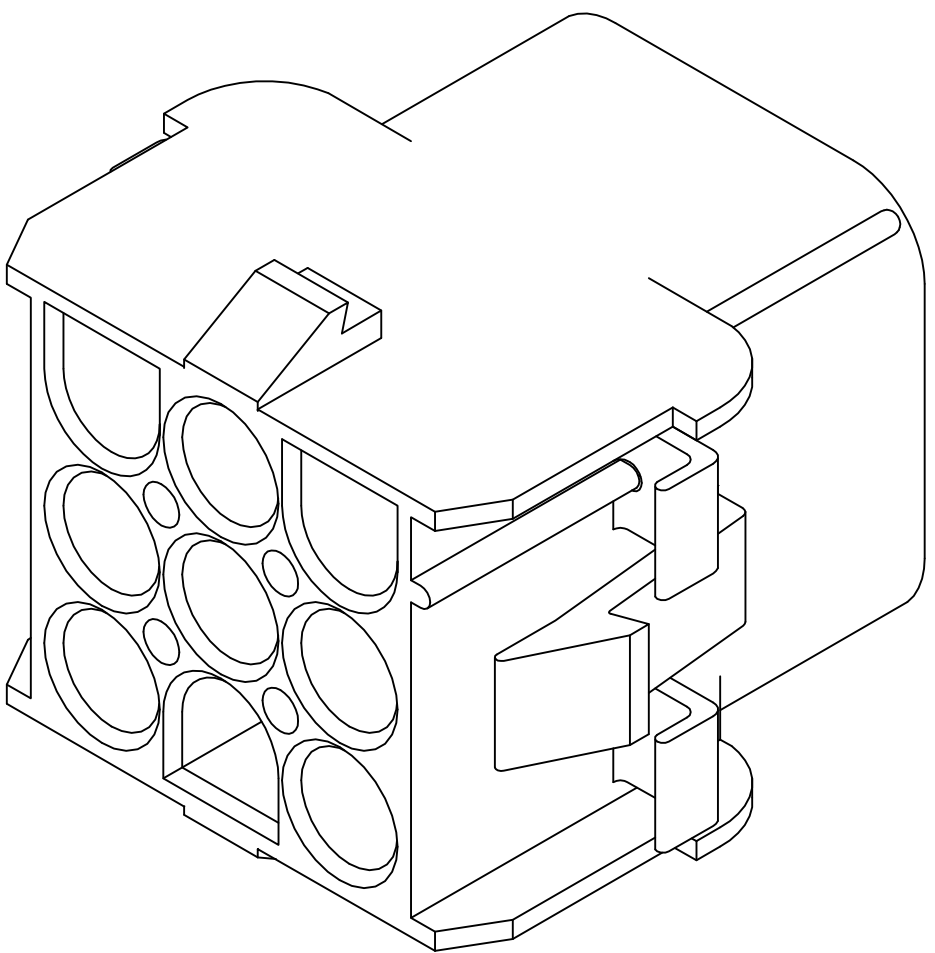

3-DIMENSIONAL MODEL
NTS

6.35	.250	—	—
4.45	.175	27.43	1.080
2.79	.110	26.43	1.041
2.54	.100	26.16	1.030
2.29	.090	20.70	.815
0.76	.030	20.32	.800
0.38	.015	12.19	.480
0.25	.010	8.13	.320
0.13	.005	6.99	.275
MM	IN	MM	IN
CONVERSION TABLE			

RED	2029315-1
COLOR	PART NUMBER

TE Connectivity

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR_RUTH	27SEPT10	CAP, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™	
		CHK TOM_MICHELUTTI	27SEPT10		
DIMENSIONS: mm		APVD TOM_MICHELUTTI		NAME	
		PRODUCT SPEC			
		APPLICATION SPEC			
		WEIGHT			
MATERIAL NYLON, UL 94V-2		FINISH —		SIZE A1	CAGE CODE 00779
				DRAWING NO C=2029315	RESTRICTED TO —
				CUSTOMER DRAWING	
				SCALE 4:1	SHEET 1 OF 1
				REV A1	