
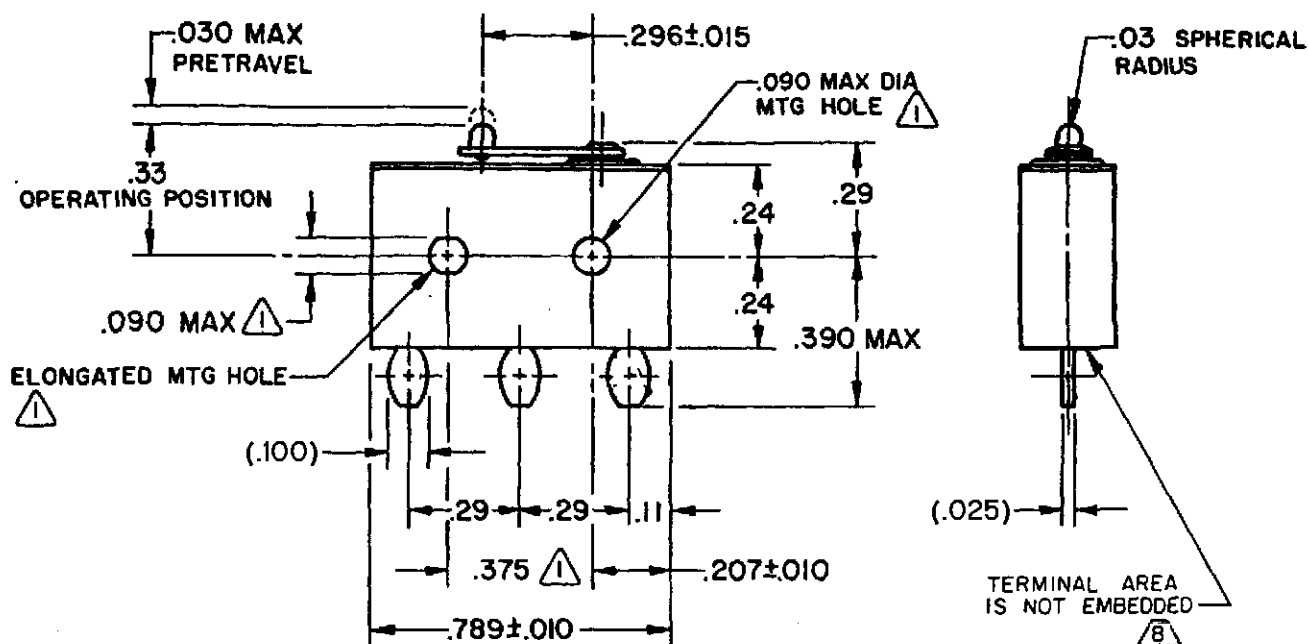


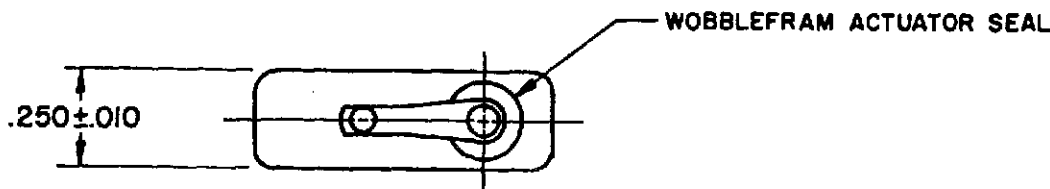


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS
- 2 - FOR USE IN TEMPERATURE RANGE -300°F TO $+500^{\circ}\text{F}$
- 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
- 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS EXCEPT NICKEL PLATED COLD ROLLED STEEL HEADER
- 5 - DO NOT APPLY MORE THAN $1 \frac{1}{2}$ INCH-POUNDS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS
- 6 - GOLD ALLOY STATIONARY CONTACTS
- 7 - 24K GOLD MOVABLE CONTACT
- 8 MICRO SWITCH RECOMMENDS POTTING TERMINAL AREA AFTER LEAD WIRES ARE ATTACHED

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE 2:1	DO NOT SCALE PRINT
OPERATING FORCE ----- 7 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) $\pm .030$ TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$ ANGLES $\pm$	
RELEASE FORCE ----- 1 OZ MIN	28 VOLTS DC RATING		
DIFFERENTIAL TRAVEL ---- .0003-.0040	INDUCTIVE-----SEA LEVEL --1/4 AMP 70,000 FT-- 1/4 AMP	WEIGHT .014 LB MAX	
OVERTRAVEL ----- .003 MIN	RESISTIVE-----SEA LEVEL--- 1 AMP 70,000 FT--- 1 AMP		

CATALOG LISTING
17HM6
PAGE 1 OF 1
RELEASE NO. CO-92283
ISSUE 4
CHECK
REVISIONS
A CO 92283
LJK
28 JAN 98
CHECK
FORMTEK
DRAWN
LJK 28 JAN 98
CHECK