

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	02MAR2016	N.P	X.X
	A1	PER ECR-16-010253	21JUL2016	N.P	X.X
	A2	PER ECR-16-016206	16NOV2016	G.W	C.W

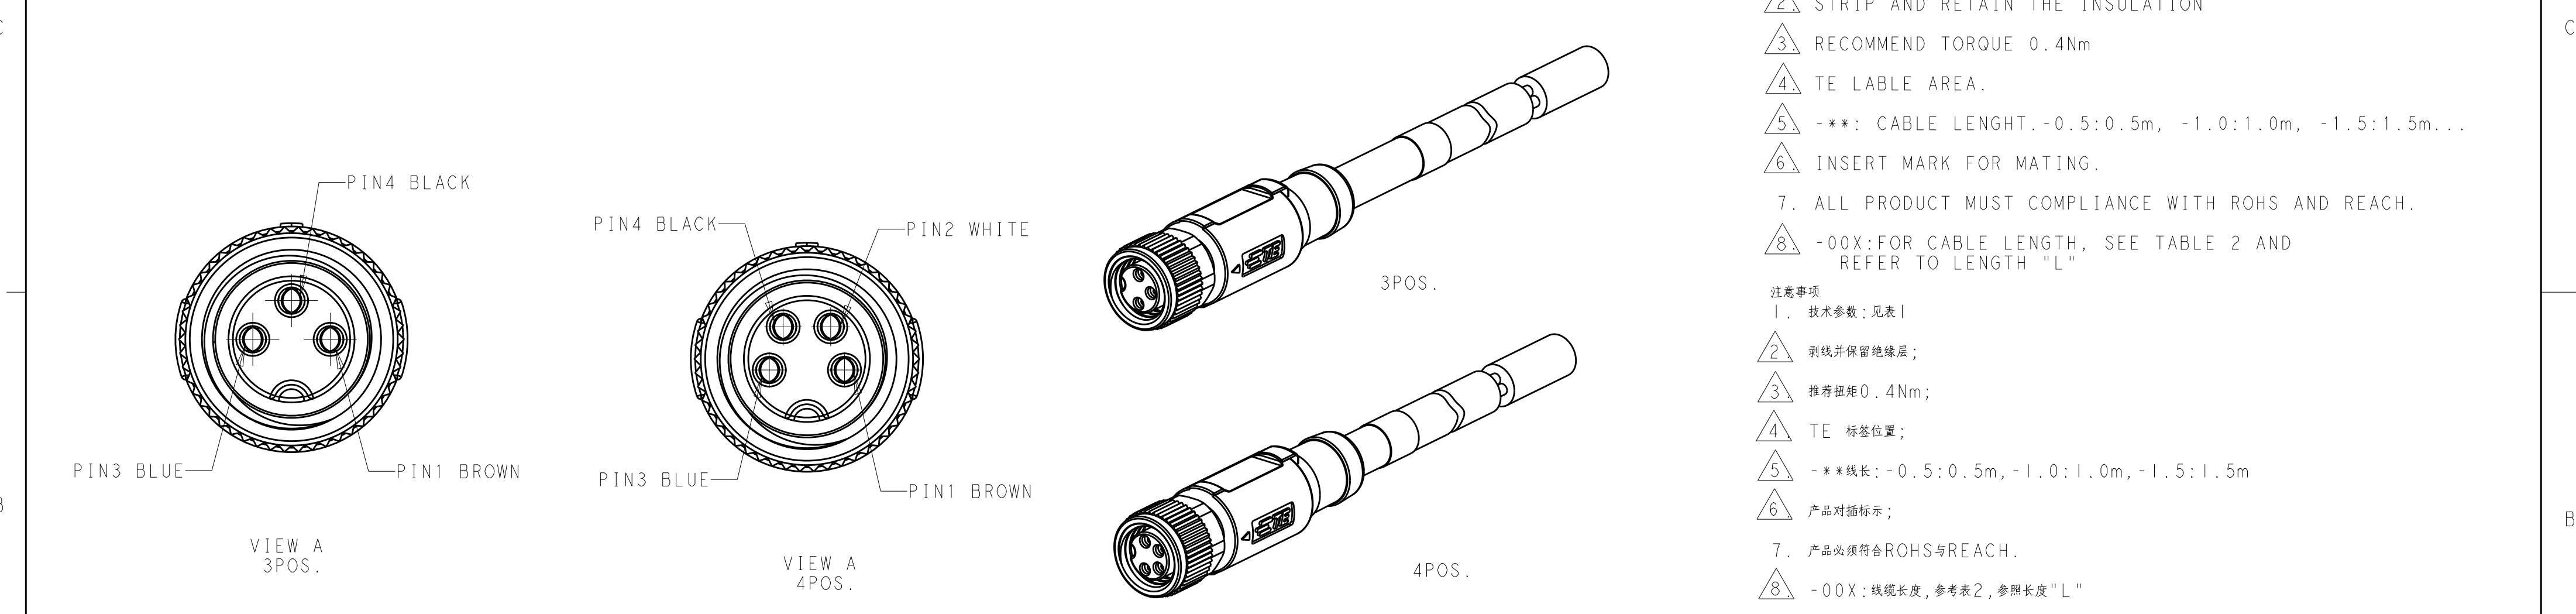
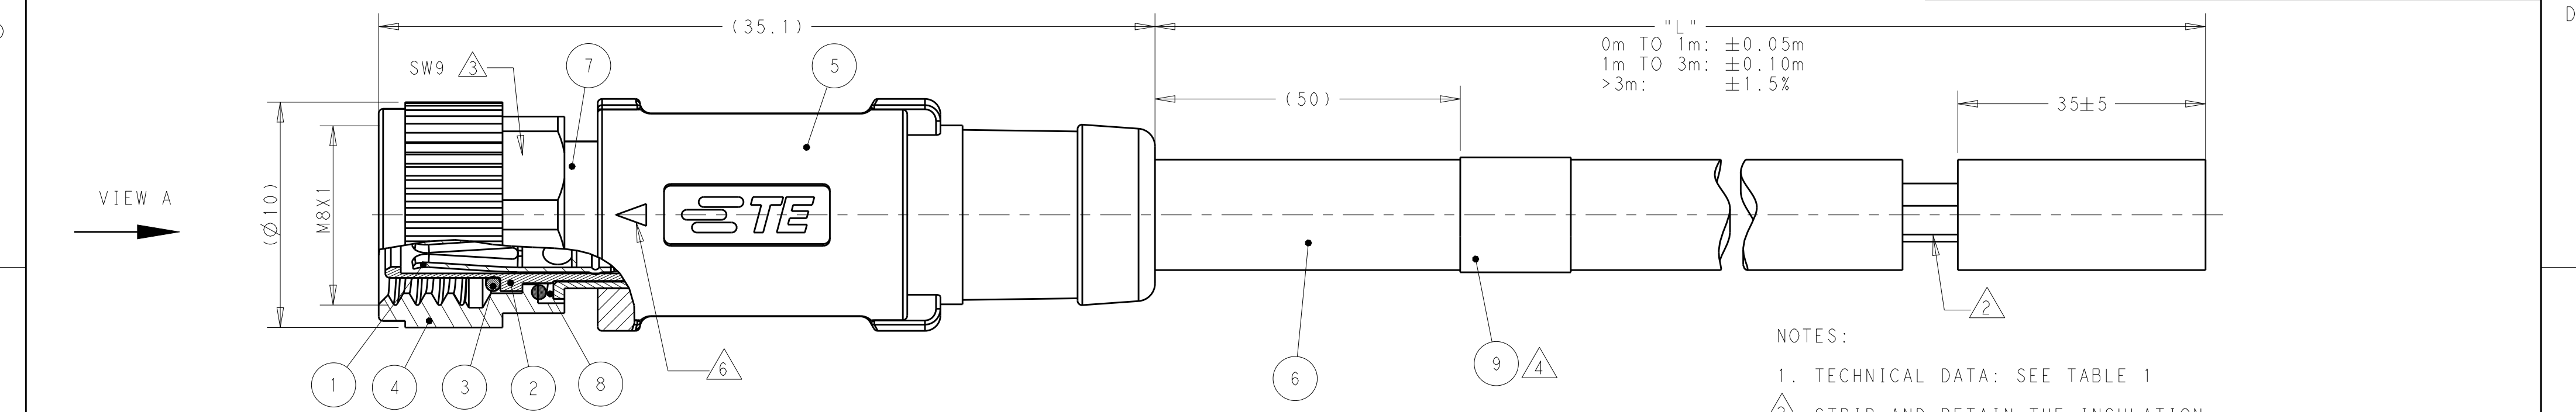



TABLE 1				TABLE 2			
TECHNICAL DATA	T40613X0003-00X	T40613X0004-00X		WIRE	TEMP.	LENGTH	
RATED VOLTAGE	60V	30V		0.34mm ² (22AWG)	-40°C~80°C	0.5m	
RATED CURRENT	3A			0.25mm ² (24AWG)	-10°C~80°C	1.0m	
POLLETION DEGREE	3				-5°C~80°C	1.5m	
OVERVOLTAGE CATEGORY	II					5.0m	
MATERIAL GROUP	II					7.0m	
DEGREE OF PROTECTION	IP67					10.0m	

WIRES: 0.34mm ² (22AWG)	STANDARD: -001: 0.5m -002: 1.0m -003: 1.5m -004: 3.0m -005: 5.0m -006: 7.0m -007: 10.0m CUSTOMIZATION: -**0: 00.0m -001: **.5m	FIXED: -40°C~80°C FLXIBLE: -25°C~80°C	GRAY	PUR (UL)	RPC-M8-FS-4CON-PUR-**SHS0.34	4	T4061340004-00X	
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-FS-3CON-PUR-**SHS0.34	3	T4061340003-00X	
		FIXED: -40°C~80°C FLXIBLE: -25°C~80°C	GRAY	PUR (UL)	RPC-M8-FS-4CON-PVC-**SHS0.34	4	T4061330004-00X	
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-FS-3CON-PVC-**SHS0.34	3	T4061330003-00X	
WIRES: 0.25mm ² (24AWG)	STANDARD: -001: 0.5m -002: 1.0m -003: 1.5m -004: 3.0m -005: 5.0m -006: 7.0m -007: 10.0m CUSTOMIZATION: -**0: 00.0m -001: **.5m	FIXED: -40°C~80°C FLXIBLE: -25°C~80°C	GRAY	PUR (UL)	RPC-M8-FS-4CON-PUR-**SH	4	T4061320004-00X	
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-FS-3CON-PUR-**SH	3	T4061320003-00X	
		FIXED: -40°C~80°C FLXIBLE: -25°C~80°C	GRAY	PUR (UL)	RPC-M8-FS-4CON-PVC-**SH	4	T4061310004-00X	
		FIXED: -10°C~80°C FLXIBLE: -5°C~80°C	BLACK	PVC (UL)	RPC-M8-FS-3CON-PVC-**SH	3	T4061310003-00X	
CABLE CHARACTERISTIC	LENGTH "L"	CABLE TEMP. RANGE	JACKET COLOR	JACKET MATERIAL	TYPE		POS.	TABLE 2 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN Nick Pan 29JAN2016	 TE Connectivity			
DIMENSIONS:				CHK Kobby Zhao 29JAN2016				
TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD Xiang Xu 29JAN2016				
PRODUCT SPEC				NAME M8 CABLE ASSEMBLY STRAIGHT FEMALE, SHIELDED, SINGLE ENDED				
APPLICATION SPEC				SIZE 108-106140	DRAWING NO			
MATERIAL				WEIGHT	RESTRICTED TO			
CUSTOMER DRAWING				SCALE	REV			

M8 CABLE ASSEMBLY STRAIGHT FEMALE, SHIELDED, SINGLE ENDED			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			
-			