

**ALL NEW
PRODUCT!**



Heyco®-Tite Brass Profile™ Liquid Tight Cordgrips

Metric Hubs

The Ultimate in Liquid Tight Strain Relief Protection

CABLE DIAMETER RANGE		PART NO.	THREAD SIZE	PART DIMENSIONS		C	D
Minimum	Maximum			A Clearance Hole Dia. in. mm.	B Head Height in. mm.		

Standard Gland

.197	5,0	.256	6,5	14800	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.71	18,0
.256	6,5	.315	8,0	14801									
.236	6,0	.315	8,0	14802									
.315	8,0	.413	10,5	14803									
.315	8,0	.433	11,0	14804									
.433	11,0	.591	15,0	14805									
.492	12,5	.630	16,0	14806									
.630	16,0	.806	20,5	14807									


High Temperature Gland *

.197	5,0	.256	6,5	14810	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.71	18,0
.256	6,5	.315	8,0	14811									
.236	6,0	.315	8,0	14812									
.315	8,0	.413	10,5	14813									
.315	8,0	.433	11,0	14814									
.433	11,0	.591	15,0	14815									
.492	12,5	.630	16,0	14816									
.630	16,0	.806	20,5	14817									

FDA Approved Gland *

.197	5,0	.256	6,5	14820	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.71	18,0
.256	6,5	.315	8,0	14821									
.236	6,0	.315	8,0	14822									
.315	8,0	.413	10,5	14823									
.315	8,0	.433	11,0	14824									
.433	11,0	.591	15,0	14825									
.492	12,5	.630	16,0	14826									
.630	16,0	.806	20,5	14827									

* Special order - consult Heyco

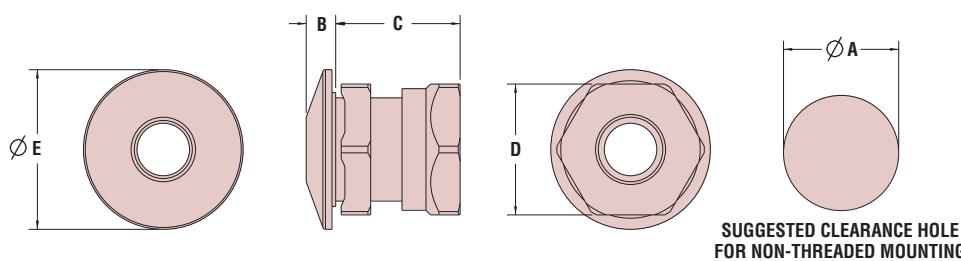

Material
Temperature Range
IP Rating

Nickel-Plated Brass w/TPE Sealing Gland and FPM Sealing Washer
-40°F (-40°C) to 212°F (100°C)
IP 68, IP 69K

*Quick
Specs*