


SPECIFICATIONS

1. CASE:
22 GA. (.030) CRS, TIN PLATED
2. RATED CURRENT:
20A
3. RATED VOLTAGE:
250VAC, 50/60Hz
4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
2.4mA @ 250VAC, 50Hz
6. WEIGHT: 5.7LB


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06-18-02	LE
B	ADD WGT	07-09-10	LE
C	SHOW TERM LOCATION	03-12-12	LE

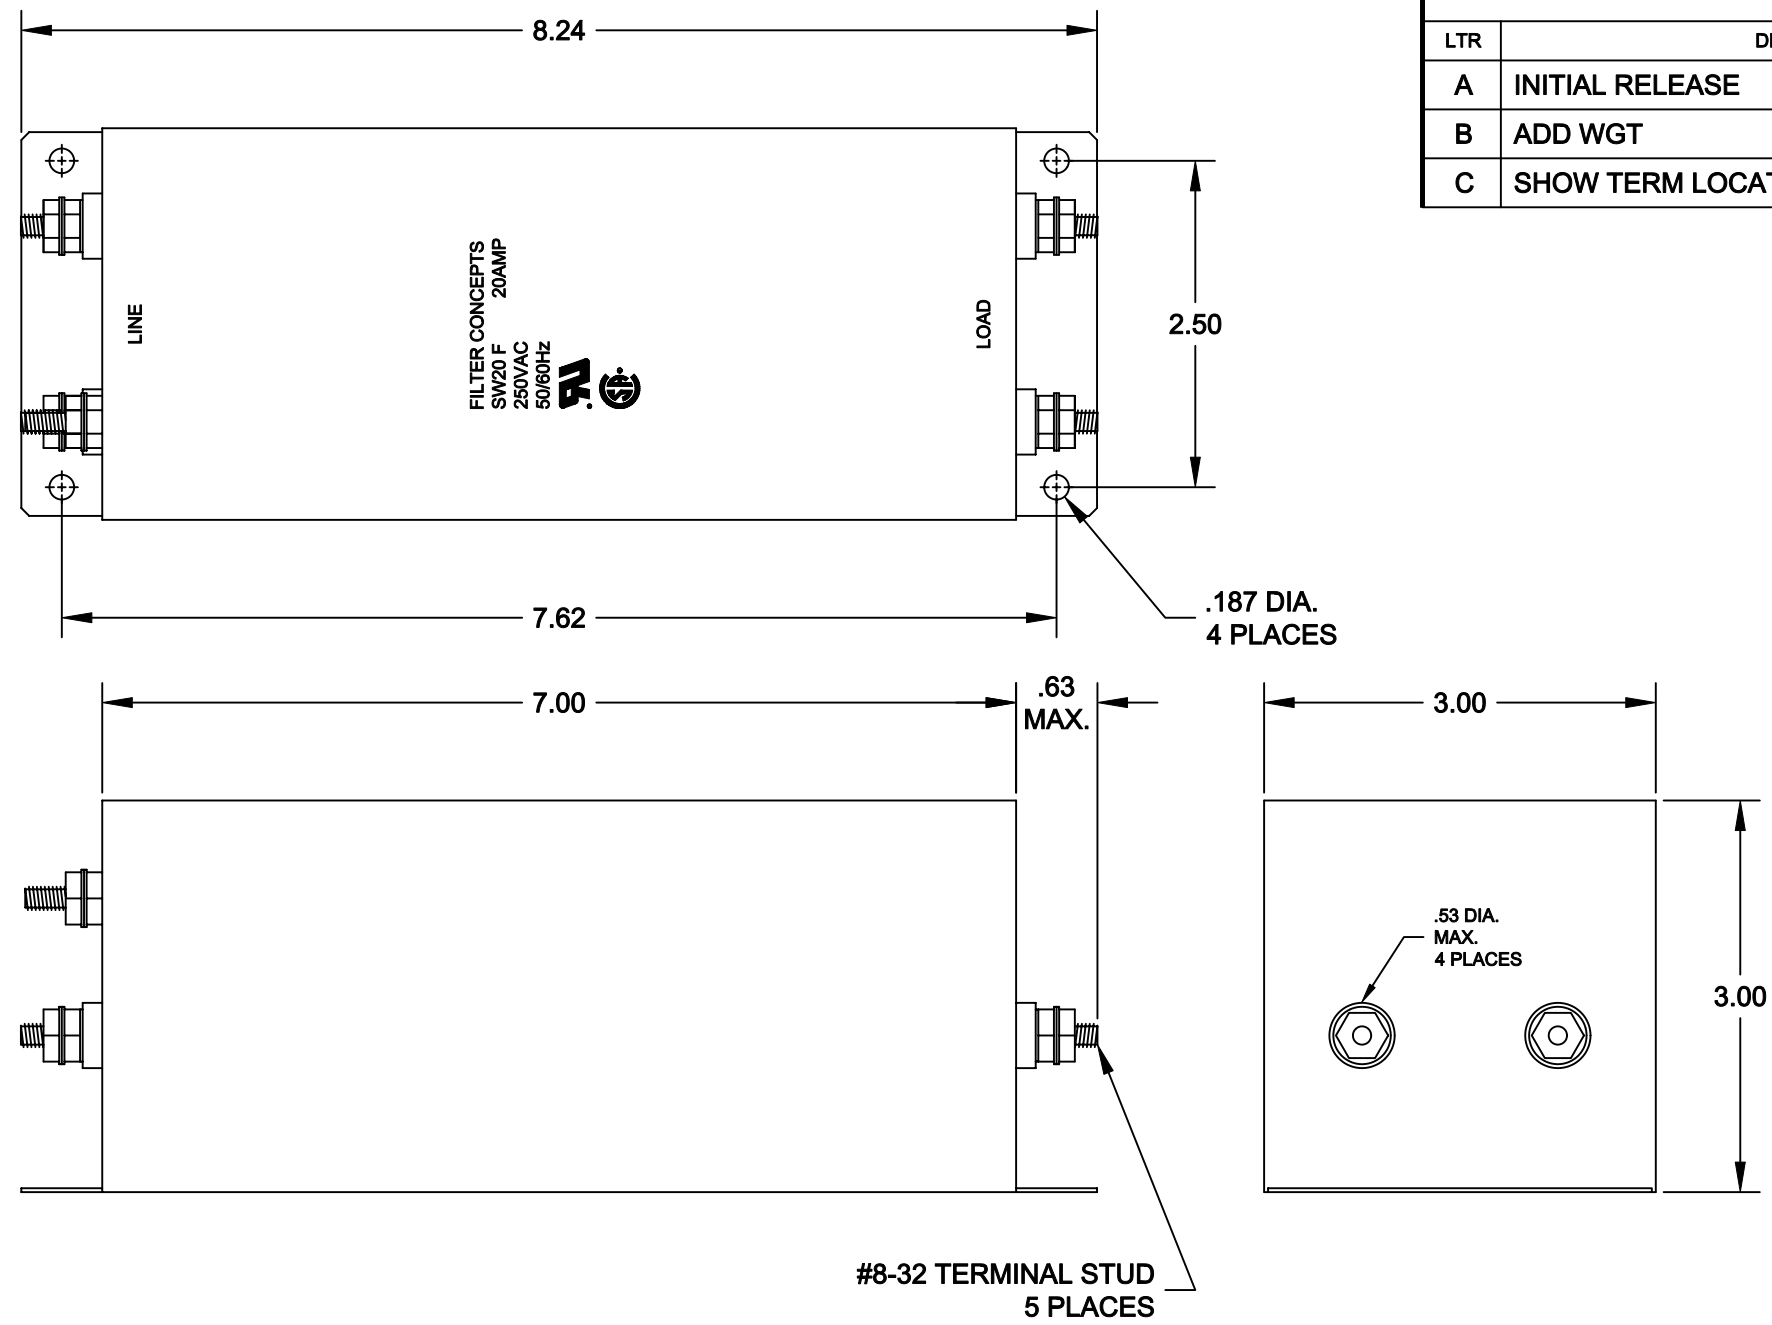

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.50 MHz	1.5 MHz	5 MHz	50 MHz	.1 GHz
L/L	55 db	65 db	65 db	65 db	65 db	50 db
L/G	35 db	65 db	65 db	65 db	55 db	50 db

SCHEMATIC

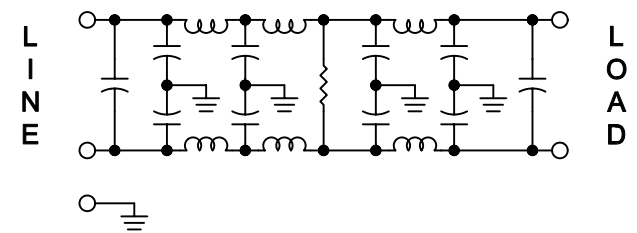

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.	
	APPROVALS	DATE
MATERIAL	DRAWN	GIANG TRINH 06-18-02
	CHECKED	DANNIEL VUONG 06-18-02
FINISH		

FILTER CONCEPTS INC.

APPLICATION DRAWING
SW20 F FILTER

SIZE	CODE IDENT NO.	DRAWING NO.
B		7375
SCALE	2/3	SHEET 1 OF 1