

TYPE  
-AM

CONFIGURATION  
-S: SINGLE

ELOPTION  
-R: RoHS COMPLIANT -  
LEAD FREE




RA TERMINATION  
-TH: THROUGH HOLE

1.  REPRESENTS A CRITICAL DIMENSION.
2. VERIFY -S PLATING, VISUALLY CHECK -F ONLY.
3. ALL PARTS ARE RoHS COMPLIANT WITH OR WITHOUT -R.

-F: GOLD FLASH ON MATING AREA,  
BRIGHT ACID TIN ON TAILS (100U" MIN)  
W/ NICKEL UNDERPLATE (SEE NOTE 3 FOR -RC)  
-S: .000030" GOLD ON MATING AREA,  
BRIGHT ACID TIN ON TAILS (100U" MIN)  
W/ NICKEL UNDERPLATE (SEE NOTE 3 FOR -RC)

Diagram of a 4-wire PA cable. The cable has four conductors. The dimensions and tolerances are as follows:

- Overall diameter: .024 [0.62]
- Conductor diameter: .276 [7.00]
- Conductor diameter: .079 [2.00]

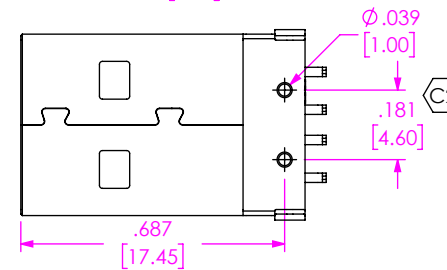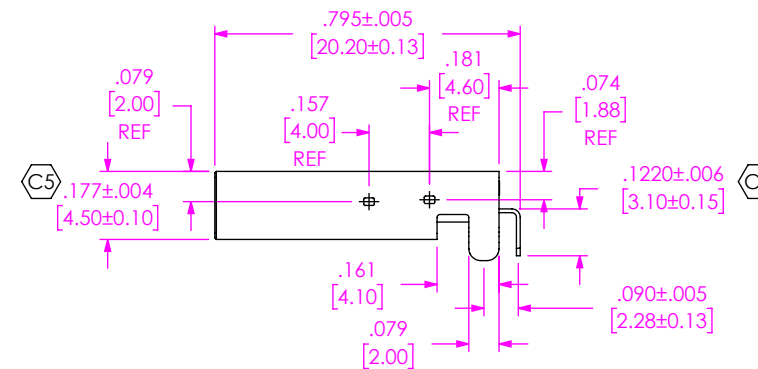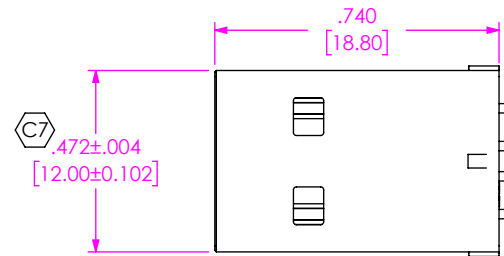

|             |          |              |
|-------------|----------|--------------|
| BY: LENNY K | 10/19/06 | SHEET 1 OF 1 |
|-------------|----------|--------------|