

HEYCO

Heyco® -Tite Snap-In-2® Liquid Tight Cordgrips

Pigtail™, Snap-In Hubs

For Panels from .062" (1,6 mm) to .125" (3,2 mm) Thick


The Ultimate in Liquid Tight Strain Relief Protection

**NO LOCKNUT
REQUIRED!**




CABLE DIA. RANGE				PART NO.	DESCRIPTION	<div>UL</div> or <div>RV</div>	PANEL DIMENSIONS						
Minimum		Maximum					Black	A Mounting Hole Dia.		B To Prevent Rotation		C Max. O.A. Length	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.
.065 .115	1,7 2,9	.210 .250	5,3 6,4	M3862 M3860	Flex LTRSCG 500 Flex LTSCG 500	<div>RV</div>	.500	12,7	.450	11,4	2.50	63,5	
.065 .105	1,7 2,7	.230 .315	5,8 8,0	M3868 M3866	Flex LTRSCG 625 Flex LTSCG 625		<div>RV</div>	.625	15,9	.550	14,0	2.83	71,9
.069 .230	1,8 5,8	.250 .395	6,4 10,0	M3874 M3872	Flex LTRSCG 750 Flex LTSCG 750	<div>RV</div>	.750	19,1	.660	16,8	3.46	87,9	
.095 .170	2,4 4,3	.260 .450	6,6 11,4	M3880 M3878	Flex LTRSCG 875 Flex LTSCG 875		<div>RV</div>	.875	22,2	.770	19,6	3.86	98,0
.180 .260	4,6 6,6	.440 .546	11,2 13,9	M3886 M3884	Flex LTRSCG 1000 Flex LTSCG 1000	<div>RV</div>	1.000	25,4	.875	22,2	4.32	109,7	
.485	12,3	.709	18,0	M3896	Flex LTSCG 1125		<div>RV</div>	1.125	28,6	1.000	25,4	4.90	124,5

Standard color black.

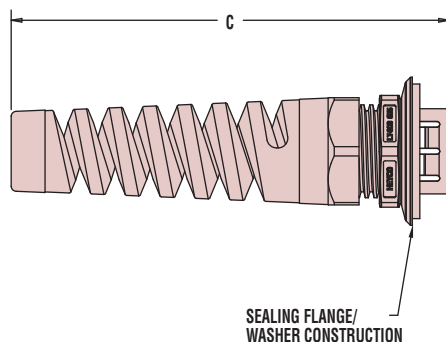

SEALING FLANGE/
WASHER CONSTRUCTION



SUGGESTED
CLEARANCE HOLE
FOR NONTHREADED
MOUNTING

- Integral nylon spring eases the cable into a lazy bend; prevents kinking and assures longest cable and product life.
- Easy installation—unique fingers securely snap into a range of panel thicknesses – up to .125" (3,2 mm) – with no tools or locknuts required.
- Sealing flange prevents sealing washer displacement due to water velocity to ensure a liquid tight IP 65 seal.
- Eliminate need for locknut or threaded hole to achieve liquid tight seal at panel; perfect for low clearance installation where locking nut access is limited.
- Ratchet design of sealing nut assembly provides superior anti-vibration and ensures a firm grip on the cable.
- Foam washer included.
- Rotation prevented when used in "Double D" mounting holes.
- Available in multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Consult Heyco for cordgrips molded in other colors.

Material
Certifications

Nylon 6/6 w/Buna N or TPE Sealing Gland
RV Recognized under Components Program of Underwriters' Laboratories File E51579

Flammability Rating
Temperature Range

CS Certified by Canadian Standard Association File 93876C
94V-2
Static -40°F (-40°C) to 239°F (115°C)
Dynamic -4°F (-20°C) to 212°F (100°C)
IP 65

IP Rating

*Quick
Specs*