

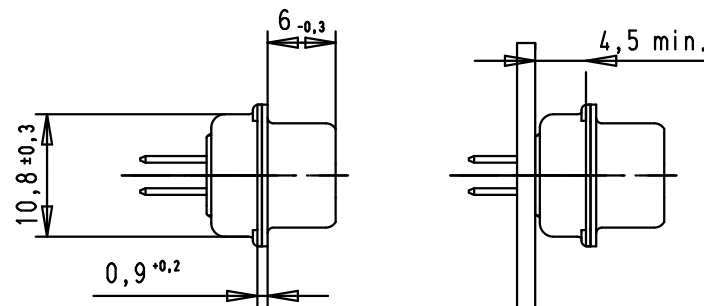


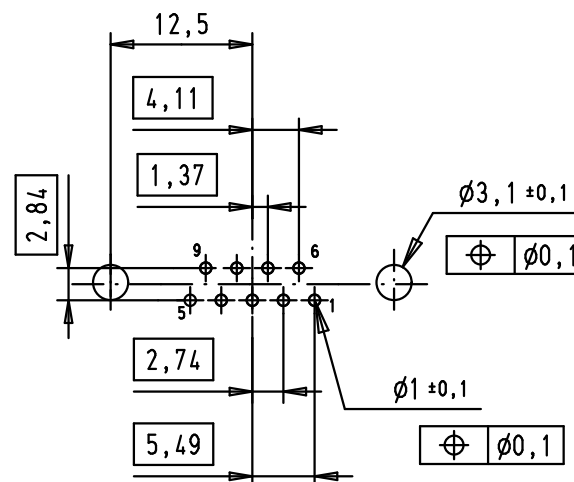

Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	—
10	—
50	—
100	—
500	30dB
1000	35dB

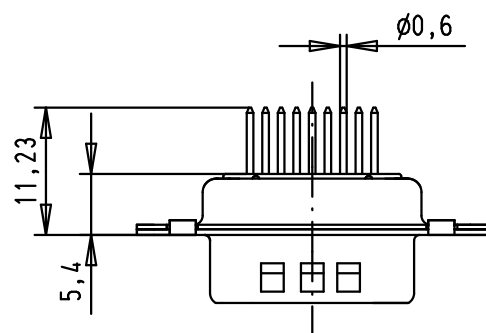

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 9 Poles, with turned solder pin, fixing hole	Ma?Mstab/ Scale 1.5:1
			Detail.	8-JUL-02	CV			
			Insp.	09/12/11	JB			
36283	09/12/11	SD	Stand.					
32802	11/07/05	JMDR	HARTING EURL F-95972 Paris				TB 09641227210	Blatt/ Page 1 / 1
31058	8-JUL-02	CV						
Mod.	Dat.	Name				Sub.		