

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		A	REVISED PER ECO-07-023317	12/17/07	SS	MS

SPECIFICATIONS:




MATERIALS:
FIXED CONTACT: BRASS, SILVER OVER NICKEL PLATED.
FRAME: STEEL, TIN PLATED.
MOVABLE CONTACT: PHOS. BRONZE, SILVER PLATED.
TERMINAL BOARD: BAKELITE.

ELECTRICAL:
CONTACT RATING: 0.3A @ 125VAC.
INITIAL CONTACT RESISTANCE: 20 MILLIOHMS MAX.
INSULATION RESISTANCE: 100 MEGAOHMS MIN @ 500VDC.
DIELECTRIC STRENGTH: 500VAC.

MECHANICAL:
ACTUATOR TRAVEL: .079" PER POSITION.
ACTUATOR FORCE: 100 TO 700 GF.


ENVIRONMENTAL:
OPERATING & STORAGE TEMP.: -10°C TO +60°C.
MECHANICAL LIFE: 10,000 CYCLES MIN.

1. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).

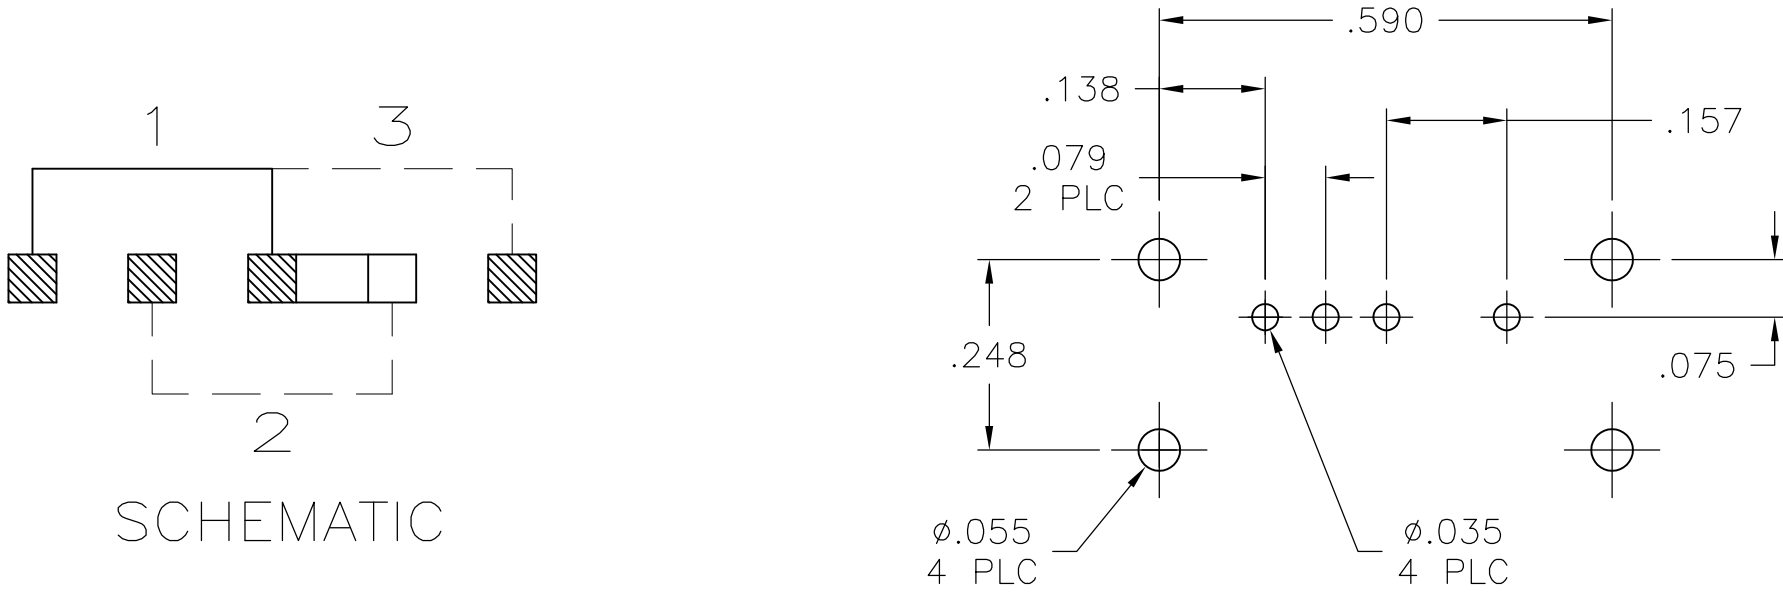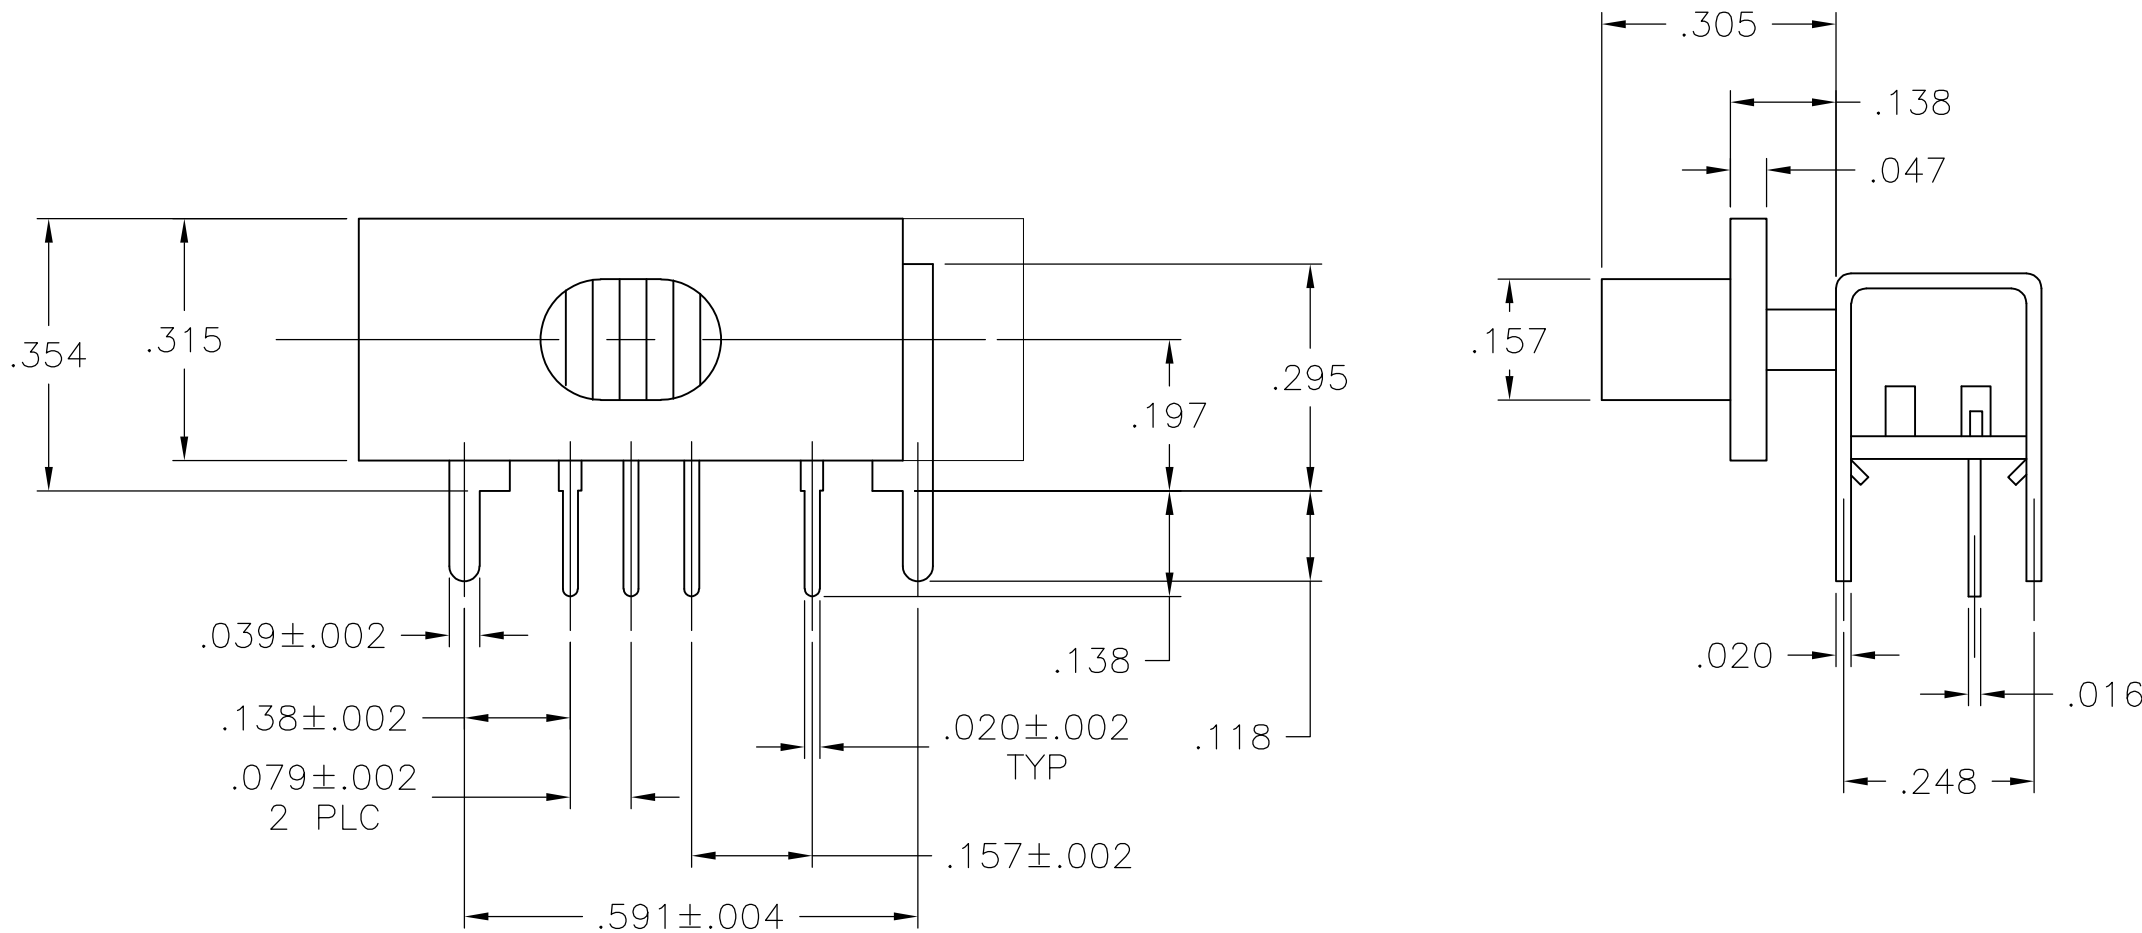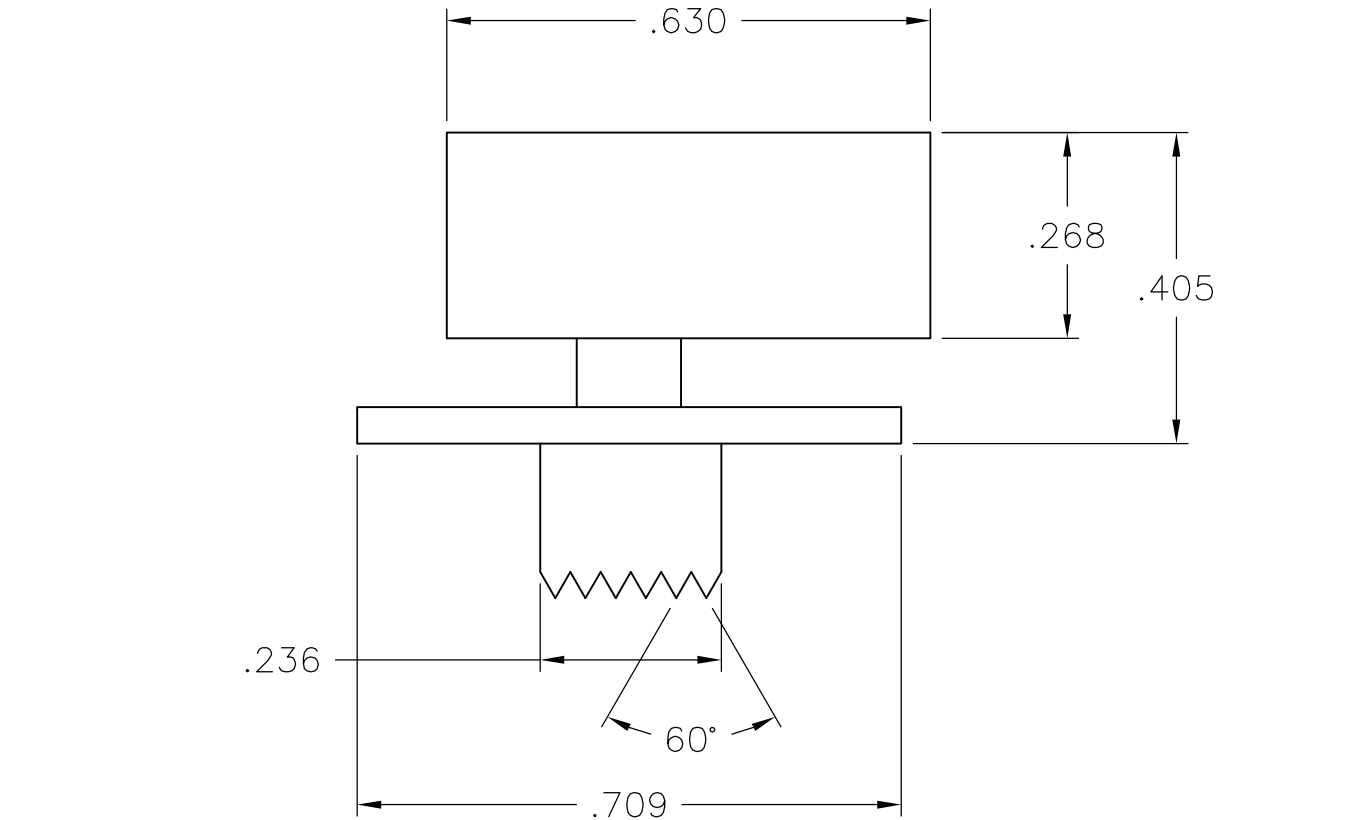

SCHEMATIC

P.C.B. LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL CHK M SARVER APVD M SARVER PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	17DEC2007 12/17/07 12/17/07	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME SDS1340RAX, SLIDE SWITCH —			
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .008 4 PLC ± — ANGLES ± 1°		SIZE A2			
MATERIAL —		FINISH —		CAGE CODE 00779		DRAWING NO C=1437577-4	
				RESTRICTED TO —			
CUSTOMER DRAWING				SCALE 4:1		SHEET 1 of 1	
				REV A			