
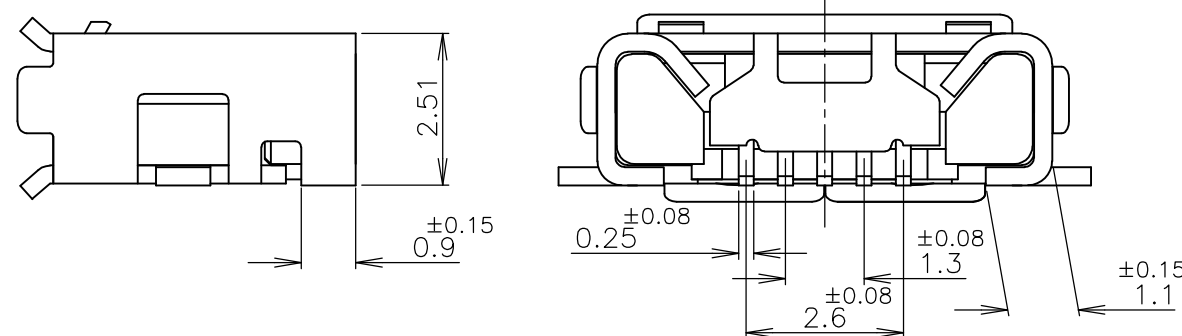


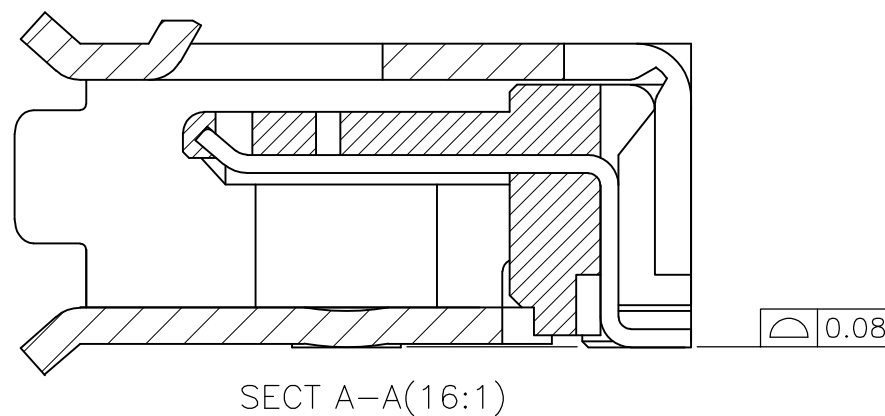

- | | | | | | | |
|----|-----|--|--|-----|--|----|
| 大度 | 0.1 | | | 0.2 | | DZ |
|----|-----|--|--|-----|--|----|

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN ,2007.
© COPYRIGHT 2007 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
J				SEE SHEET 1	

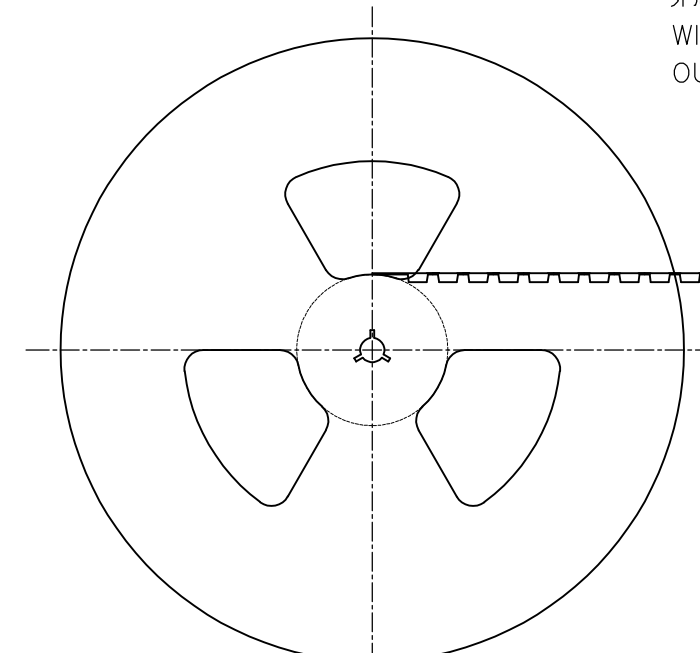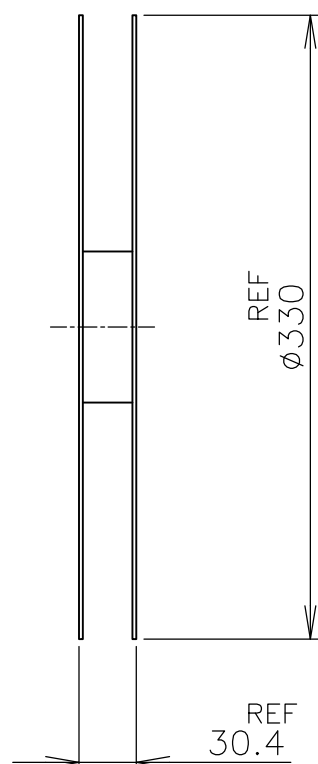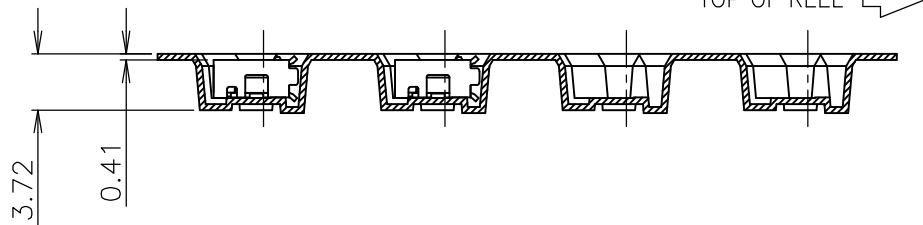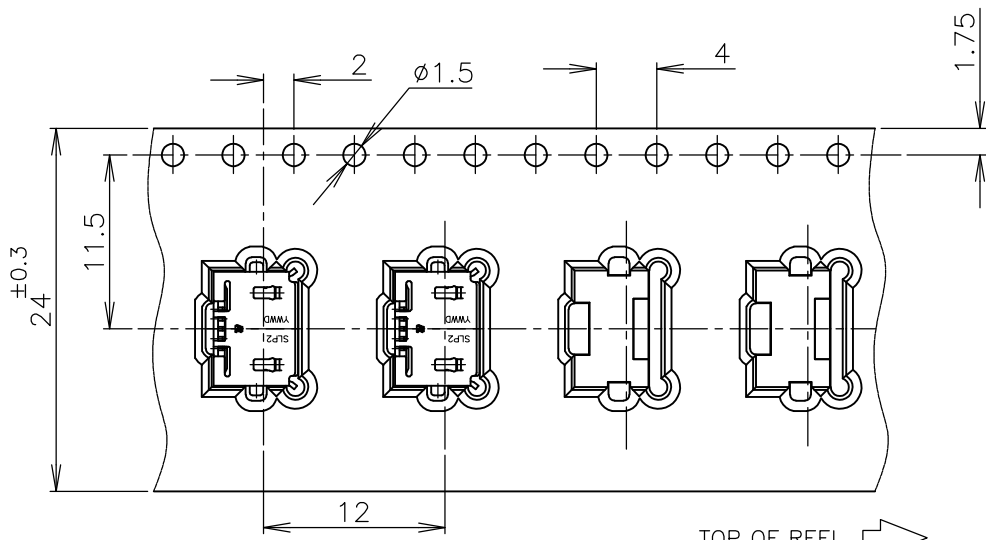

カバートープリーダー部
外周1巻
WIDE COVER TAPE AROUND
OUT PERIPHERY 1 TURN

剥離強度 0.1-1.3N MAX(300±10mm/min)
PEELING STRENGTH
剥離強度 165~180°
PEELING ANGLE

引き出し方向
TOP OF REEL


1000個/リール
1000EA/REEL

HOLES
8穴

空 部
WITHOUT CHARGE
300mm程度
APPROX

製品装填部
WITH PRODUCT CHARGE

空 部
WITHOUT CHARGE
600mm程度
APPROX

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity			
		CHK				
		APVD				
DIMENSIONS: 単位: 耗 MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	PRODUCT SPEC 製品規格		NAME 名称 MICRO USB RECEPTACLE STANDARD TYPE AB ASSY		
	0 PLC ± -	APPLICATION SPEC 取付適用規格		SIZE	CAGE CODE	DRAWING NO 番号
	1 PLC ± -			A3	00779	C-1981584
MATERIAL 材料	FINISH 仕上	WEIGHT		RESTRICTED TO		
		CUSTOMER DRAWING		SCALE 尺度	SHEET	REV
				2:1	2 OF 2	D2