


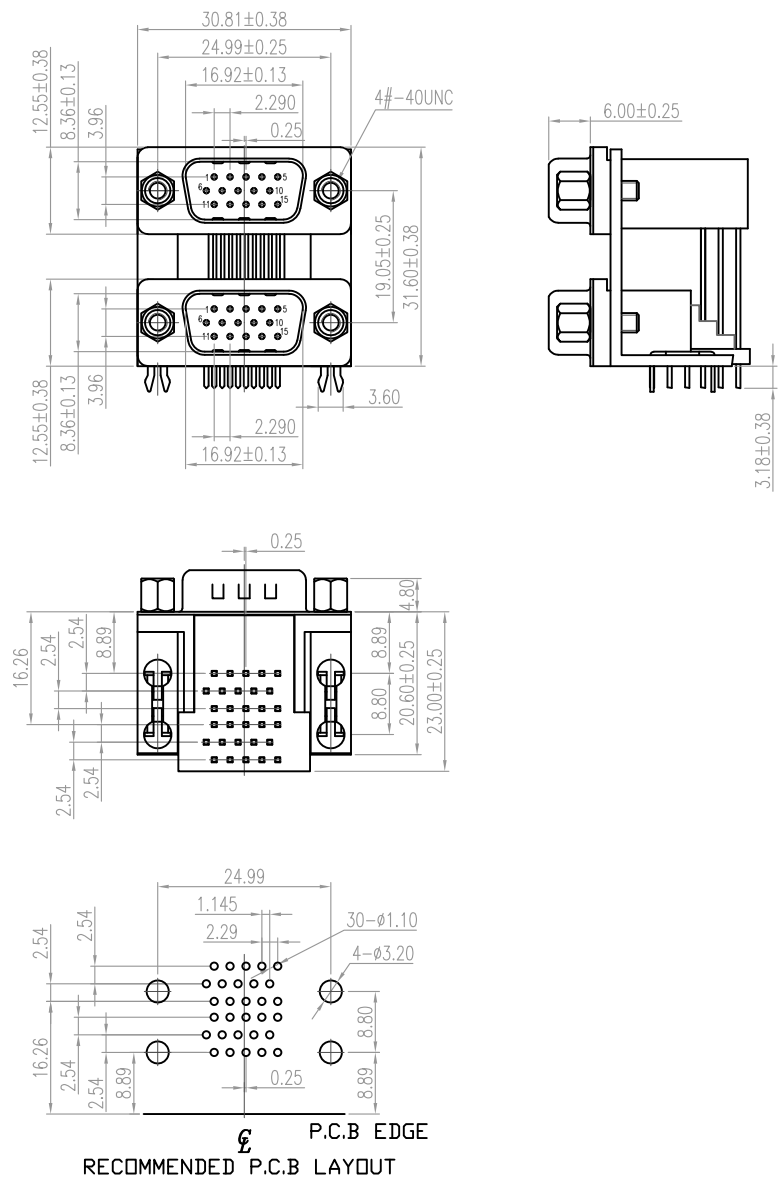

ELECTRICAL CHARACTERISTICS

VOLTAGE: 250 VAC (rms) Max.
CURRENT RATING: 3 AMPS PER CONTACT
CONTACT RESISTANCE: 25 mOhms Max.
INSULATION RESISTANCE: 5000 MOhms Min.
dieLECTRIC WITHSTANDING: 1000 VAC (rms)
TOTAL MATING FORCE: 6.0 Kgf Max.
TOTAL UNMATING FORCE: 1.2 Kgf Min.
OPERATING TEMPERATURE: -55°C TO +85°C

MATERIAL CHARACTERISTICS

HOUSING: PA9T, UL94V-0, BLACK
CONTACTS: COPPER ALLOY
SHELL: SPCC
BOARDLOCK: COPPER ALLOY
BRACKET: ZINC ALLOY
SCREWLOCK: COPPER ALLOY

PLATING CHARACTERISTICS

CONTACTS: GOLD FLASH OVER NICKEL AT CONTACT AREA
TIN PLATED OVER NICKEL AT THE SOLDER AREA
SHELL: NICKEL PLATED
BOARDLOCK: TIN PLATED
BRACKET: NICKEL PLATED
SCREWLOCK: NICKEL PLATED

178-YYY-613R577

SERIES _____
POSITIONS _____
H15 _____
GENDER _____
61 = MALE OVER MALE
SHELL PLATING _____
3 = NICKEL
RoHS COMPLIANT (HIGH TEMP. PROCESS) _____
HARDWARE OPTIONS _____
57 = 4-40 STAND OFFS/BOARD LOCKS
PLATING OPTIONS _____
7 = GOLD FLASH MATING AREA WITH TIN TAILS

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: J. KADEL
		DATE: 07/05/2018

UNITS = mm	DO NOT SCALE FROM DRAWING			
	SCALE: NTS	SHEET 1	OF 1	REV 3
	DWG NO. 178-H15-613R577			

NorComp	
---------	--