
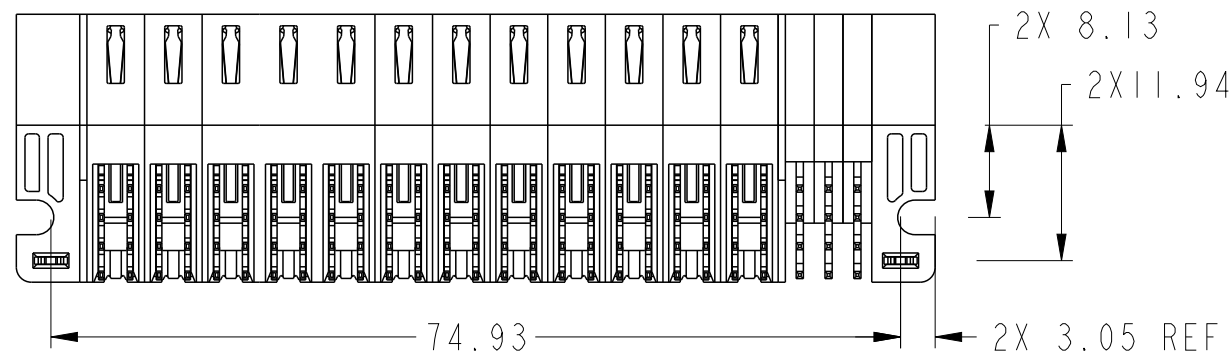
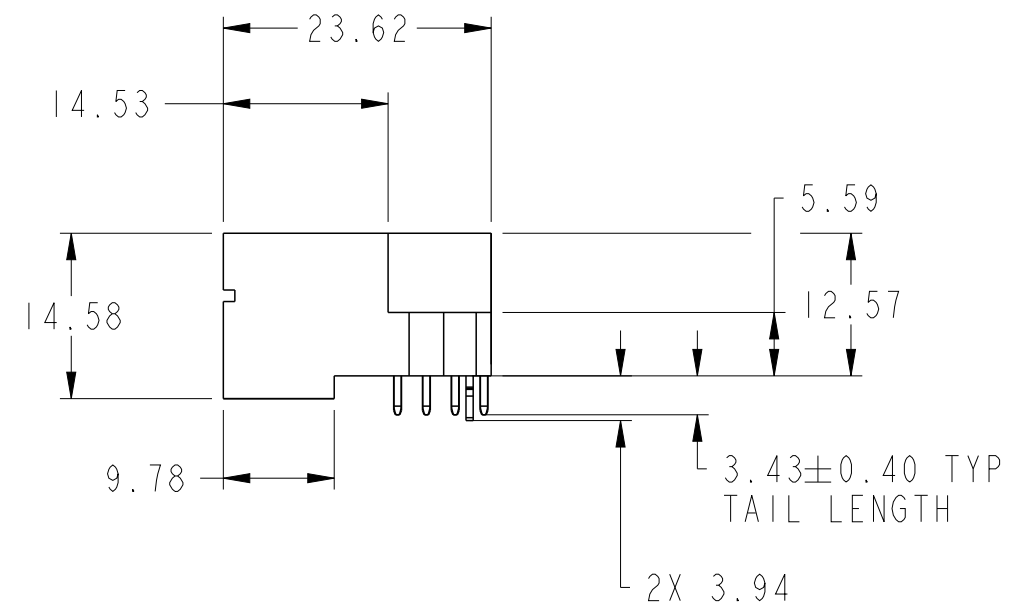
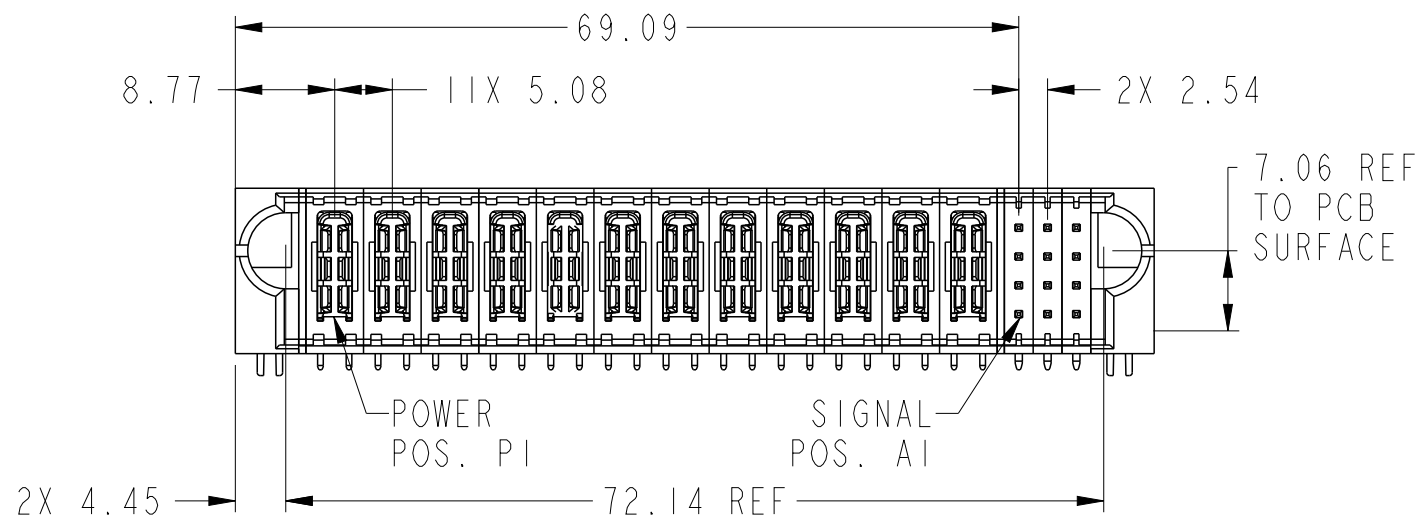












PRODUCT NUMBER

SEE SHEET 2

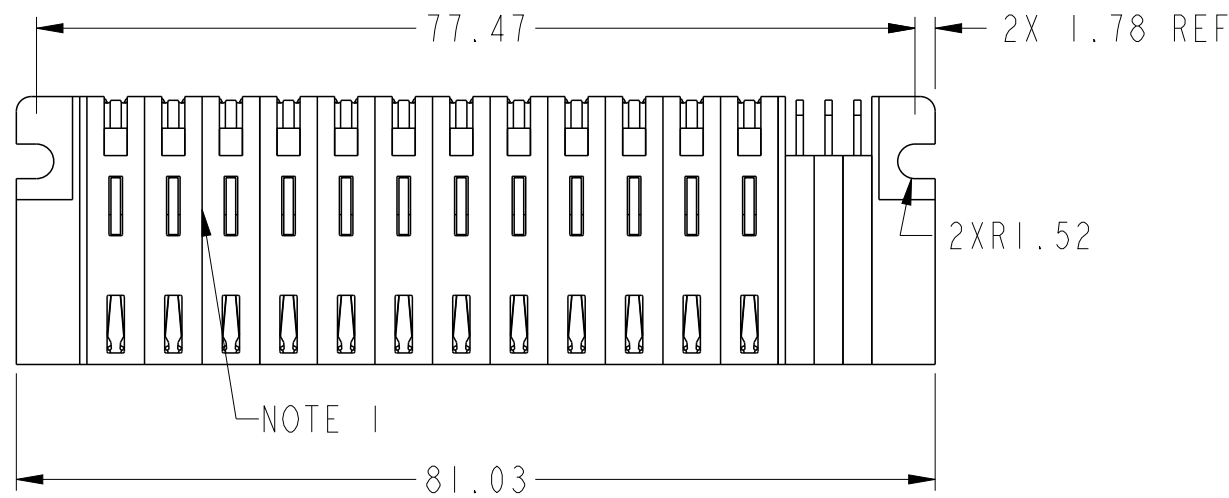

spec ref				dr	Sunny2 Liu	2017/06/12	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/08/11			ecn no -			
				chr	Kaka Zhang	2017/08/11			rel level Released			
				appr	Pei-Ming Zheng	2017/08/11			product family PwrBlade+			
surface ISO 1302	linear	0.X	±0.5	Amphenol FCI	title 12HDP + 12S RA STB PLUG				dwg no 10106132-C003001	rev A		
		0.XX	±0.25									
		0.XXX	±0.10									
	angular	0°	±2°	cat. no.		Product - Customer Drw					sheet 1 of 3	

PRODUCT NO.	ROWS		HIGH POWER												S				
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	1	2	3	E2	
10106132-C003001LF	DCBA		H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1		UU	UU	UU	
																TT	TT	TT	
																SS	SS	SS	
																RR	RR	RR	

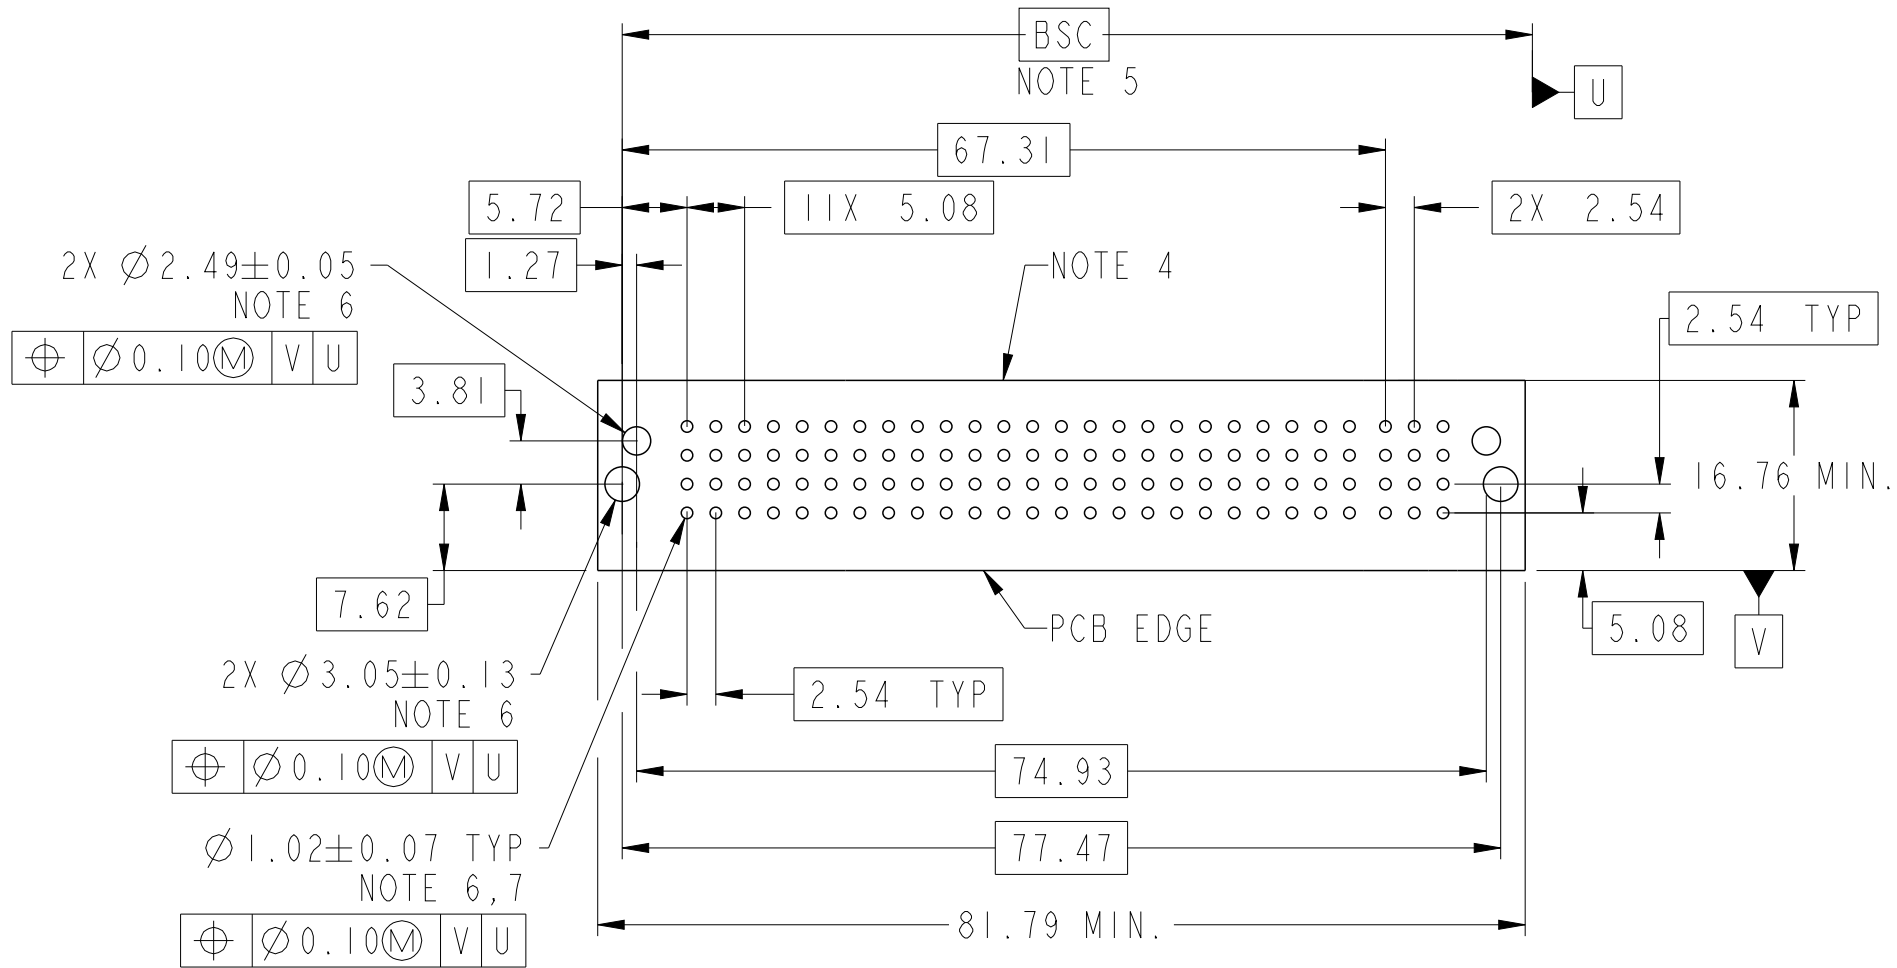



CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

spec ref				dr		Sunny2 Liu	2017/06/12	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		Sunny2 Liu	2017/08/11			ecn no -			
				chr		Kaka Zhang	2017/08/11						
				appr		Pei-Ming Zheng				2017/08/11	product family		
surface	linear	0.X		±0.5		Amphenol FCi	title 12HDP + 12S RA STB PLUG				dwg no 10106132-C003001		rev A
		0.XX		±0.25									
		0.XXX		±0.10									
	ISO 1302		angular	0°		±2°		cat. no.				Product - Customer Drw	

NOTES:

- 1) PRODUCT MARK:  
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.  
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.  
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN  
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE  
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY  
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.  
APPLICATION SPECIFICATION : GS-20-141.  
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Sunny2 Liu	2017/06/12	projection			MM	size		A3	scale		3:2										
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sunny2 Liu	2017/08/11			ecn no -															
ISO 406						chr		Kaka Zhang	2017/08/11			rel level Released															
ISO 1101						appr		Pei-Ming Zheng	2017/08/11																		
								product family				PwrBlade+															
surface  ISO 1302		linear		0.X		±0.5		Amphenol FCi				title		12HDP + 12S				dwg no		10106132-C003001				rev		A	
				0.XX		±0.25																					
				0.XXX		±0.10																					
				angular		0°		±2°						cat. no.		Product - Customer Drw				sheet 3 of 3							