


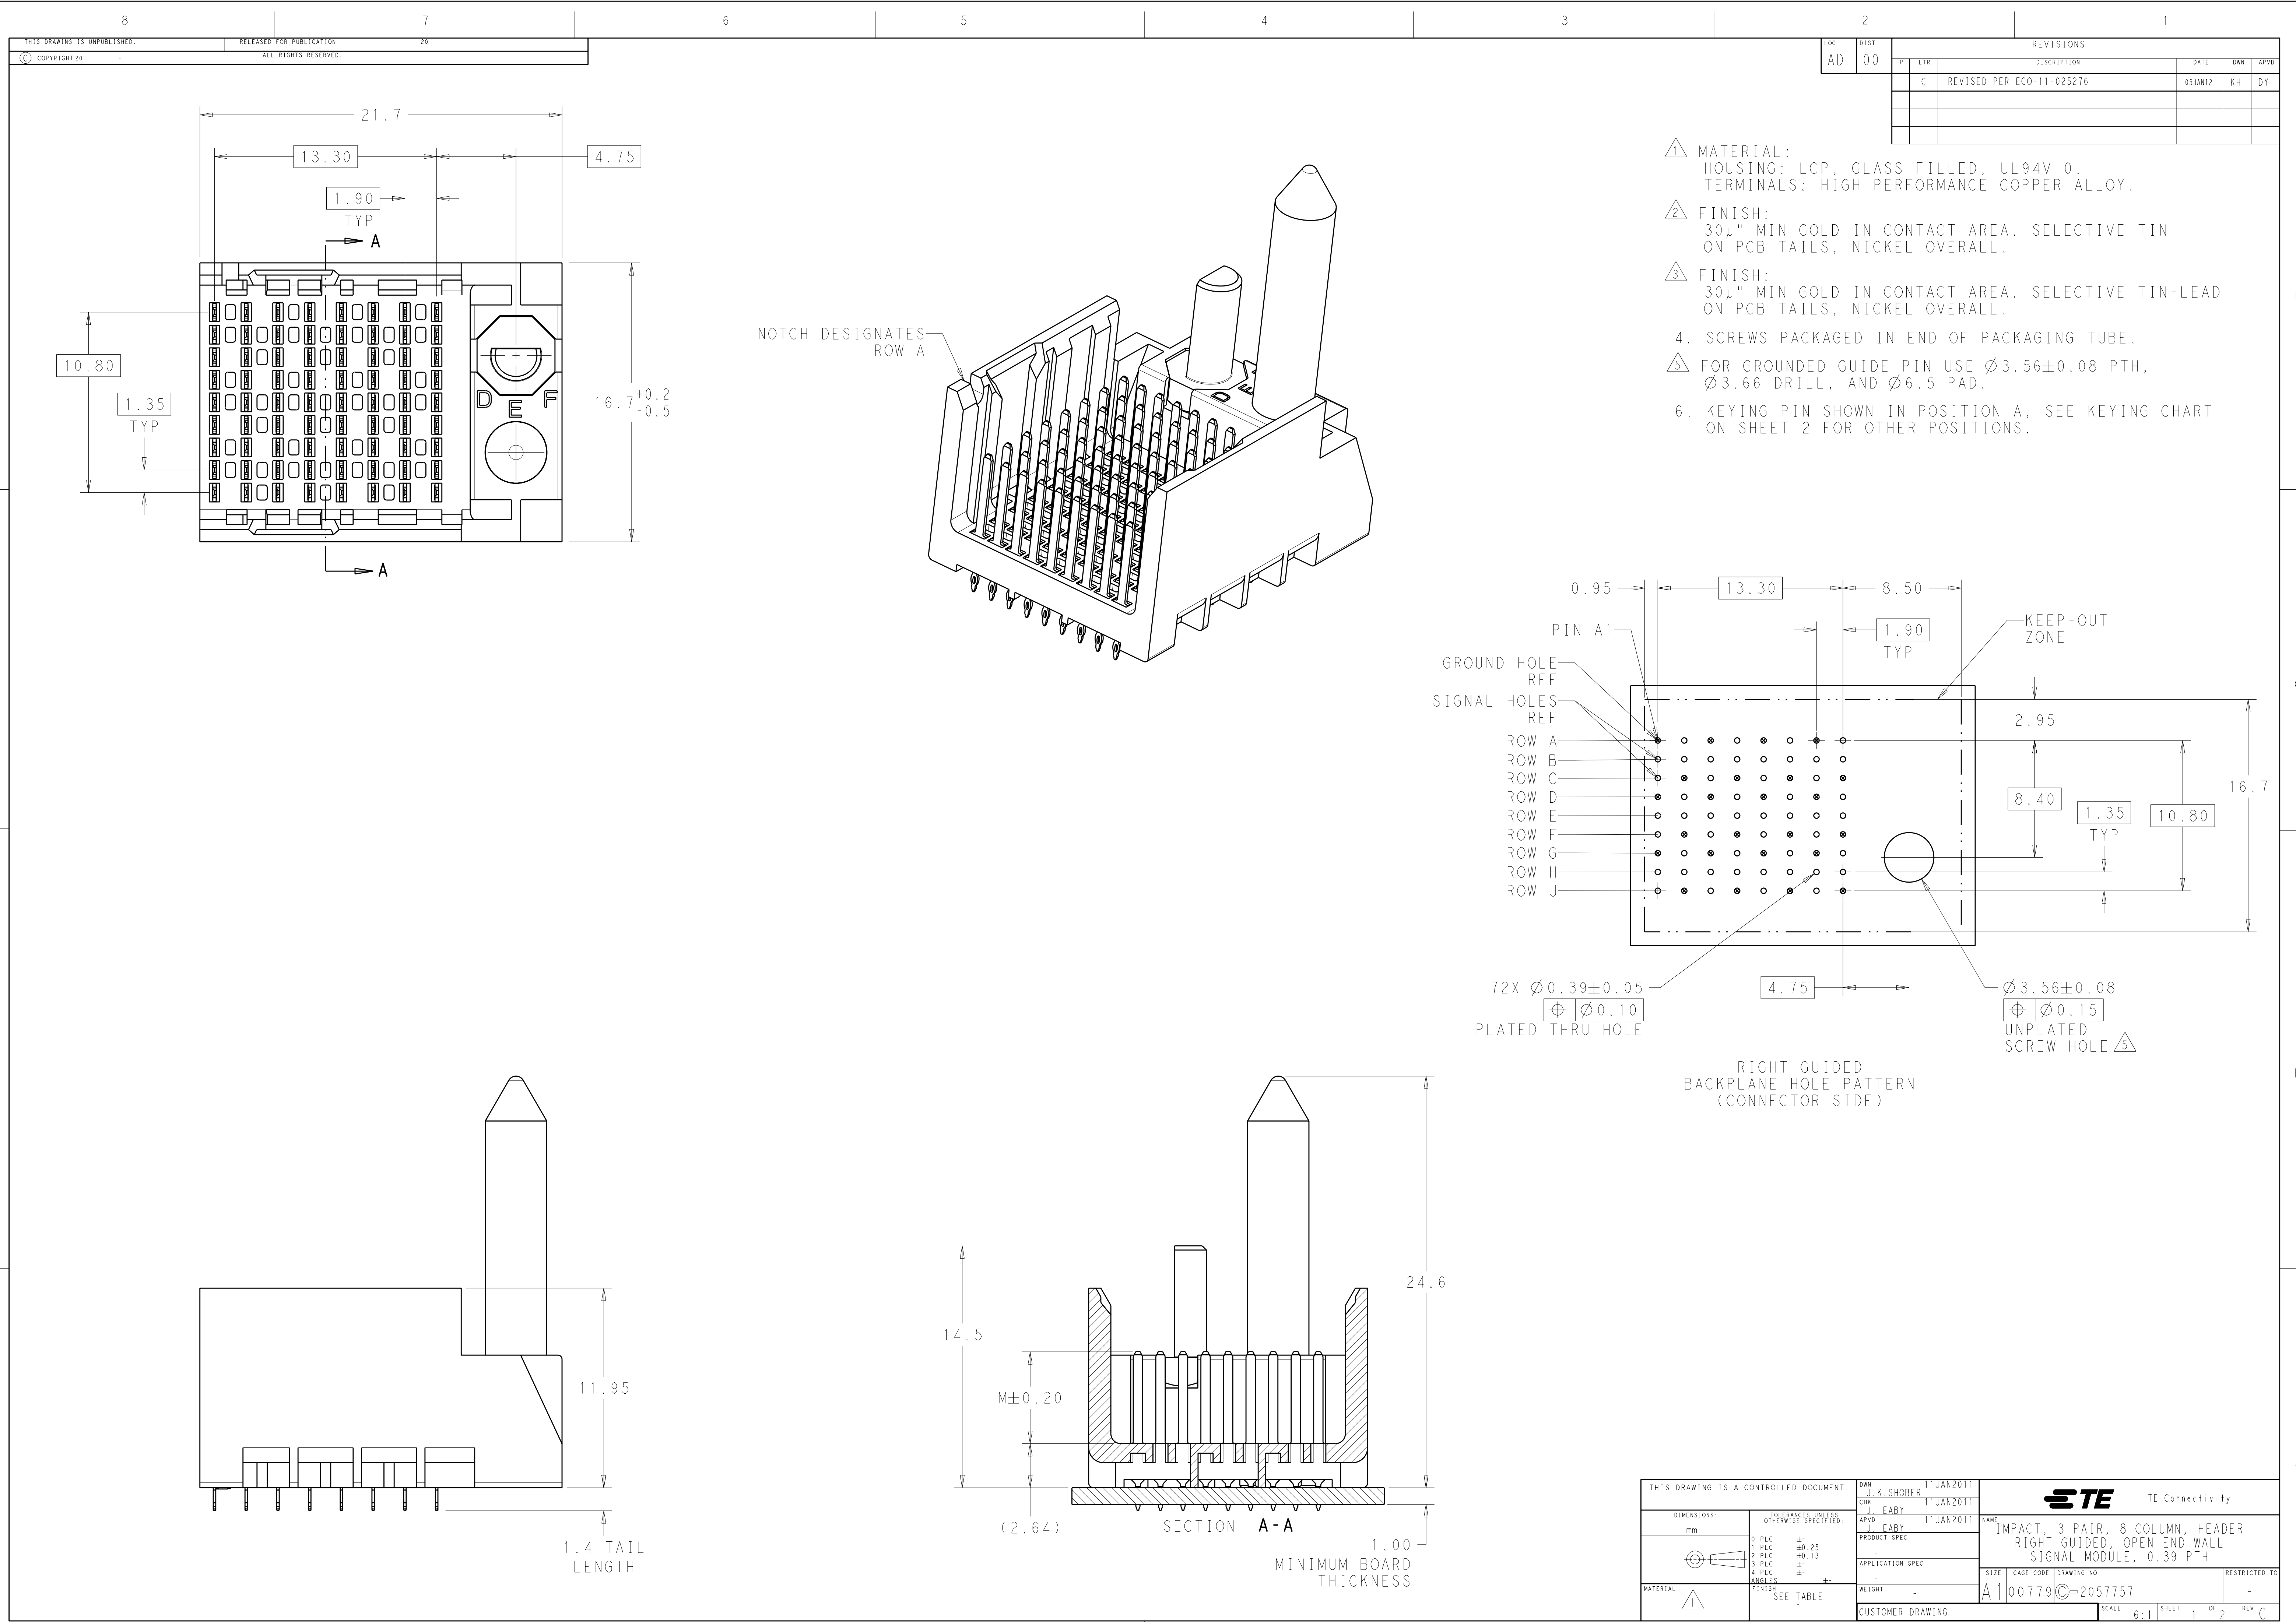

LOC		DIST		REVISIONS				
AD	00	P	LYR	DESCRIPTION	DATE	OWN	APVD	
			C	REVISED PER ECO-11-025276	05JAN12	KH	DY	

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.
- 3 FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD
ON PCB TAILS, NICKEL OVERALL.
4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH,
Ø3.66 DRILL, AND Ø6.5 PAD.
6. KEYING PIN SHOWN IN POSITION A. SEE KEYING CHART
ON SHEET 2 FOR OTHER POSITIONS.

RIGHT GUIDED
BACKPLANE HOLE PATTERN
(CONNECTOR SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN	J. K. SHOBER	11JAN2011	 TE Connectivity			
DIMENSIONS:		CHK	J. EABY	11JAN2011				
mm		APVD	J. EABY	11JAN2011	NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			IMPACT, 3 PAIR, 8 COLUMN, HEADER			
9 PLC ±		APPLICATION SPEC			RIGHT GUIDED, OPEN END WALL			
1 PLC ±0.25		WEIGHT			SIGNAL MODULE, 0.39 PTH			
2 PLC ±0.13		SIZE			CAGE CODE			
3 PLC ±		DRAWING NO			RESTRICTED TO			
4 PLC ±		A100779			C=2057757			
ANGLES		CUSTOMER DRAWING			SCALE			
FINISH		SEE TABLE			6:1			
MATERIAL		SHEET			1 OF 2			
SEE TABLE		REV			C			

LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

	H	5.5	8-2057757-6
	H	4.9	8-2057757-5
	H	4.5	8-2057757-4
	H	5.5	8-2057757-3
	H	4.9	8-2057757-2
	H	4.5	8-2057757-1
	G	5.5	7-2057757-6
	G	4.9	7-2057757-5
	G	4.5	7-2057757-4
	G	5.5	7-2057757-3
	G	4.9	7-2057757-2
	G	4.5	7-2057757-1
	F	5.5	6-2057757-6
	F	4.9	6-2057757-5
	F	4.5	6-2057757-4
	F	5.5	6-2057757-3
	F	4.9	6-2057757-2
	F	4.5	6-2057757-1
	E	5.5	5-2057757-6
	E	4.9	5-2057757-5
	E	4.5	5-2057757-4
	E	5.5	5-2057757-3
	E	4.9	5-2057757-2
	E	4.5	5-2057757-1
	D	5.5	4-2057757-6
	D	4.9	4-2057757-5
	D	4.5	4-2057757-4
	D	5.5	4-2057757-3
	D	4.9	4-2057757-2
	D	4.5	4-2057757-1
	C	5.5	3-2057757-6
	C	4.9	3-2057757-5
	C	4.5	3-2057757-4
	C	5.5	3-2057757-3
	C	4.9	3-2057757-2
	C	4.5	3-2057757-1
	B	5.5	2-2057757-6
	B	4.9	2-2057757-5
	B	4.5	2-2057757-4
	B	5.5	2-2057757-3
	B	4.9	2-2057757-2
	B	4.5	2-2057757-1
	A	5.5	1-2057757-6
	A	4.9	1-2057757-5
	A	4.5	1-2057757-4
	A	5.5	1-2057757-3
	A	4.9	1-2057757-2
	A	4.5	1-2057757-1
	-	5.5	2057757-6
	-	4.9	2057757-5
	-	4.5	2057757-4
	-	5.5	2057757-3
	-	4.9	2057757-2
	-	4.5	2057757-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

KEY POSITION
CHART

NONE

A

E

B

F

C

G

D

H

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	J. K. SHOBER	11JAN2011	TE Connectivity		
			CHK	J. EABY	11JAN2011			
DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME		
mm						IMPACT, 3 PAIR, 8 COLUMN, HEADER		
			9 PLC	±		PRODUCT SPEC		
			3 PLC	±0.25		APPLICATION SPEC		
			5 PLC	±0.13				
			4 PLC	±				
MATERIAL			ANGLES	±		SIZE		
-			FINISH	±		CAGE CODE		
-			SEE TABLE			DRAWING NO		
						RESTRICTED TO		
						A100779C=2057757		
						CUSTOMER DRAWING		
						SCALE		
						5:1		
						SHEET		
						2		
						OF		
						2		
						REV		
						C		