



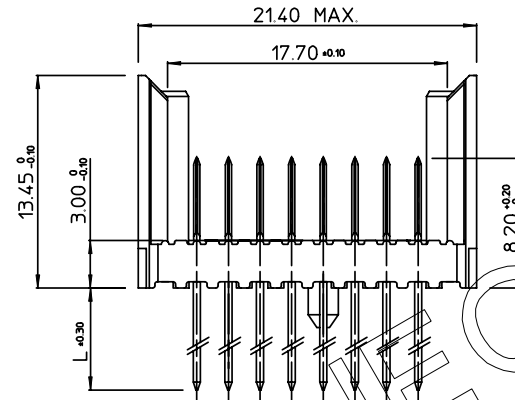

CURRENT RATING : 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT / CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE : 20 mΩ MAX
INSERTION FORCE : 0.60 N MAX / CONT
EXTRACTION FORCE : 0.15 N MIN / CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

LAY-OUT
P.C.B. - HOLE



DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS TERUGZENDING VERPLICHT.

1. *HM2P89P#8110

PERFORMANCE LEVEL INDICATOR
(REFER DWG No. BS,C ,201844 ,003)

LEAD FREE INDICATOR : LF=LEAD FREE
(DIGIT 15&16)

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS,A ,201572,001

4. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

MALE SIGNAL STRAIGHT PRESS-FIT-TO-BOARD CONNECTOR									
EXTENSION MODULE (WIDE BODY)									
1DEC ± 0.2 2DEC ± 0.1 ANGLES $\pm 1^\circ$		APPR.	DATE	SIGN.	MILLIPACS 2 / TYPE F (8 ROW) / NO SHIELDING				
		DRAFT	1996-04-30	W. Panis	CAT. No. HM2P89P#8110----				
		CHECKED			SCALE				
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.		PROD. MGR.			 www.fciconnect.com				3/1
ALL DIMENSIONS IN MM		PR.ENG. MGR.							
		PR.MGT. MGR.			REFERENCES BS,C ,202259,003 C				
 		PDM: Rev:C			STATUS: Released		CUSTOMER DRAWING: Released		REVISION
					DRAWING No. 1		Printed: Dec 02, 2001		