


REV.	DATE	DESCRIPTION
NC	07/08/07	INITIAL RELEASE

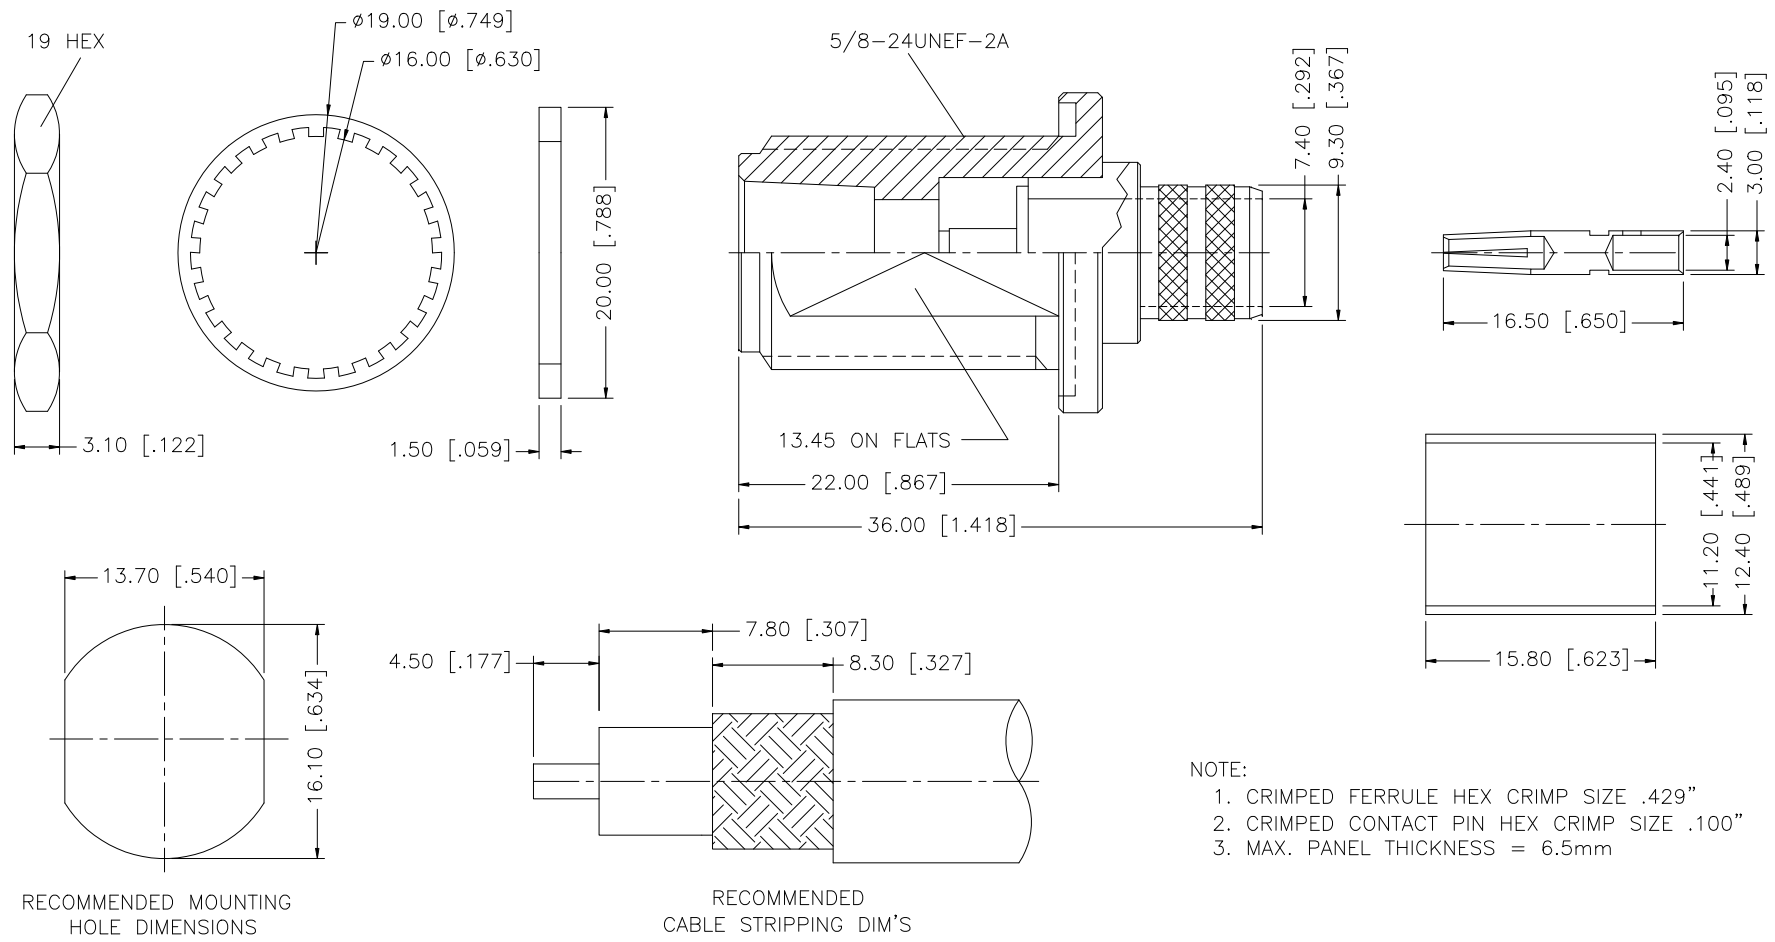

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100"
3. MAX. PANEL THICKNESS = 6.5mm

8	FERRULE	COPPER	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex								
7	CONTACT PIN	BER. COPPER	GOLD	1		DRAWN	G.R.S.						07/08/07			
6	HEX NUT	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION N BULKHEAD CRIMP JACK (FOR RG-214/U CABLE)								
5	LOCK WASHER	BRASS	NEXCOTE	1		ISSUED										
4	GASKET	SILICONE	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1	PART NO. 172168								
3	BARREL	BRASS	NEXCOTE	1												
2	INSULATOR	TEFLON	NATURAL	1	DO NOT SCALE DRAWING	CAD FILE C:/172/172168.DWG		DWG. NO.		172168.DWG	REV.	NC	SIZE	A	SCALE	NA
1	BODY	BRASS	NEXCOTE	1												
DESCRIPTION					MATERIAL	FINISH	QTY									