

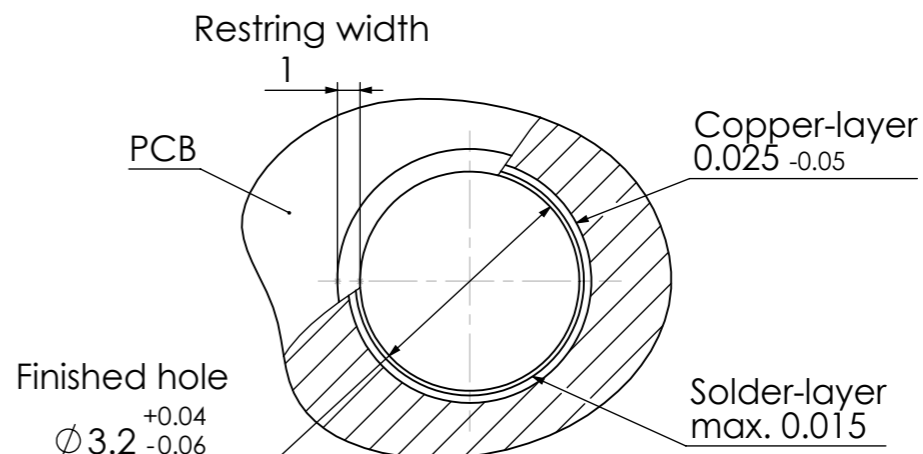


RoHS compliant

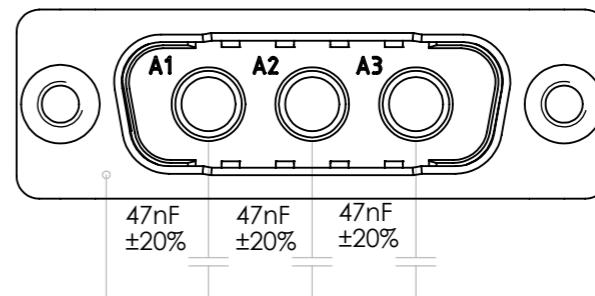

Schematic of feed - through capacitor connections.

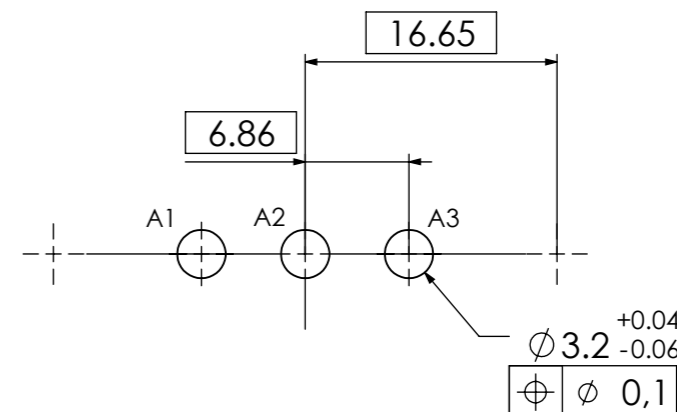

PCB hole pattern, mounting side



4	2	Threaded spacer	M3 / Steel	tin plated
3	3	High power contact	FMP250P156I	20 A / 47nF
2	1	Shell	Steel	tin plated
1	1	Insulator	PA46 (-40°C - +130°C)	black
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

				Measurement without tolerance occ. to ISO 2768-m	SCALE 2:1	TITLE D-Sub Filter-Connector	
				NAME / DATE			
			DRAWN	Denzinger 08-05-2003			
			CHECKED	ffloßmann 25-11-2003			
3	25-11-2003	2 1314					DWG.NO.
2	06-06-2003	2 1251					
1							
REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE			REPLACEMENT FOR:	PAGE

COMMENT: ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, NO PART OF THIS DRAWING MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. NO PART OF THIS DRAWING MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.