

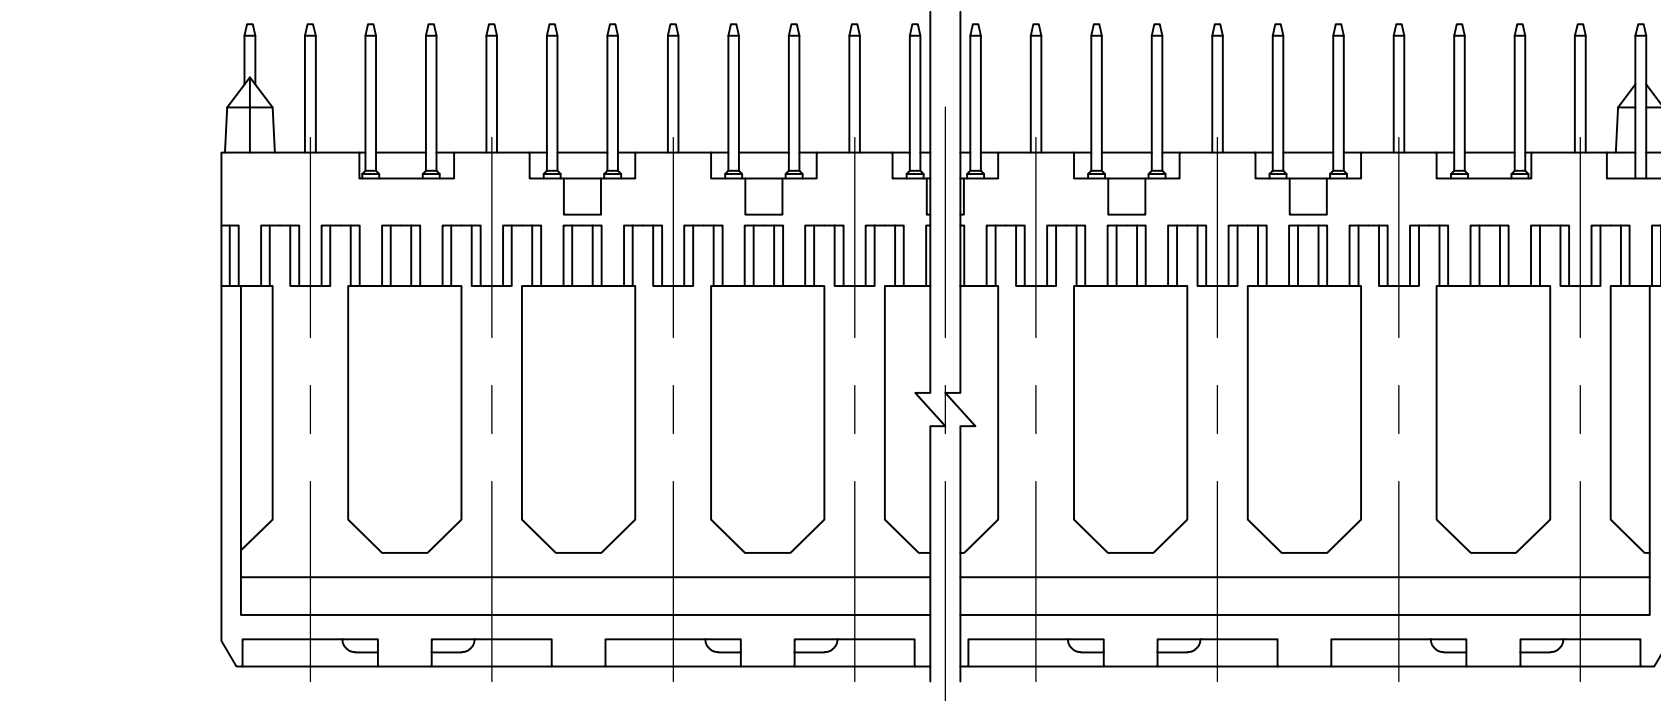
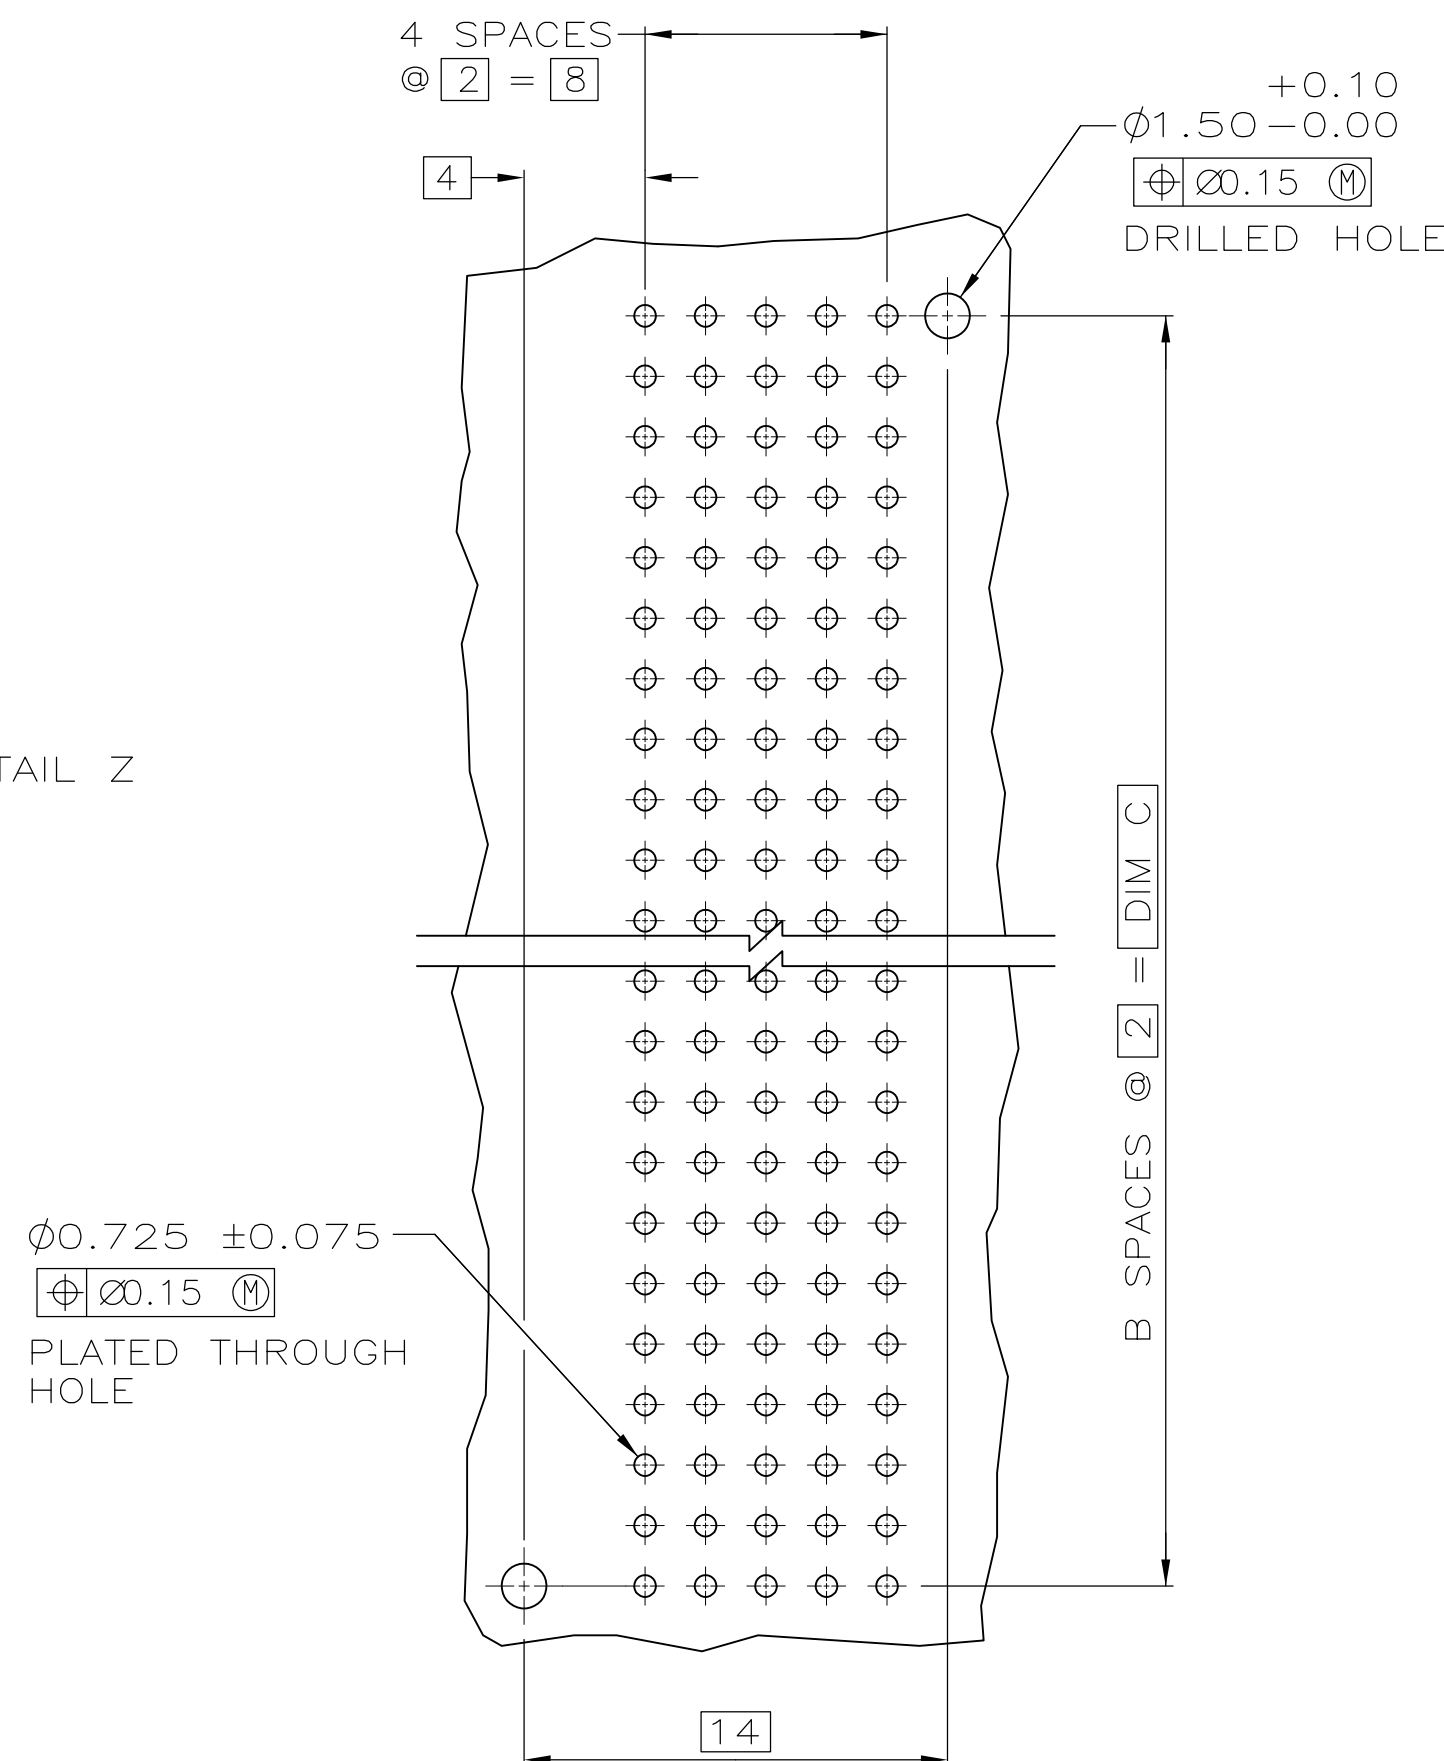
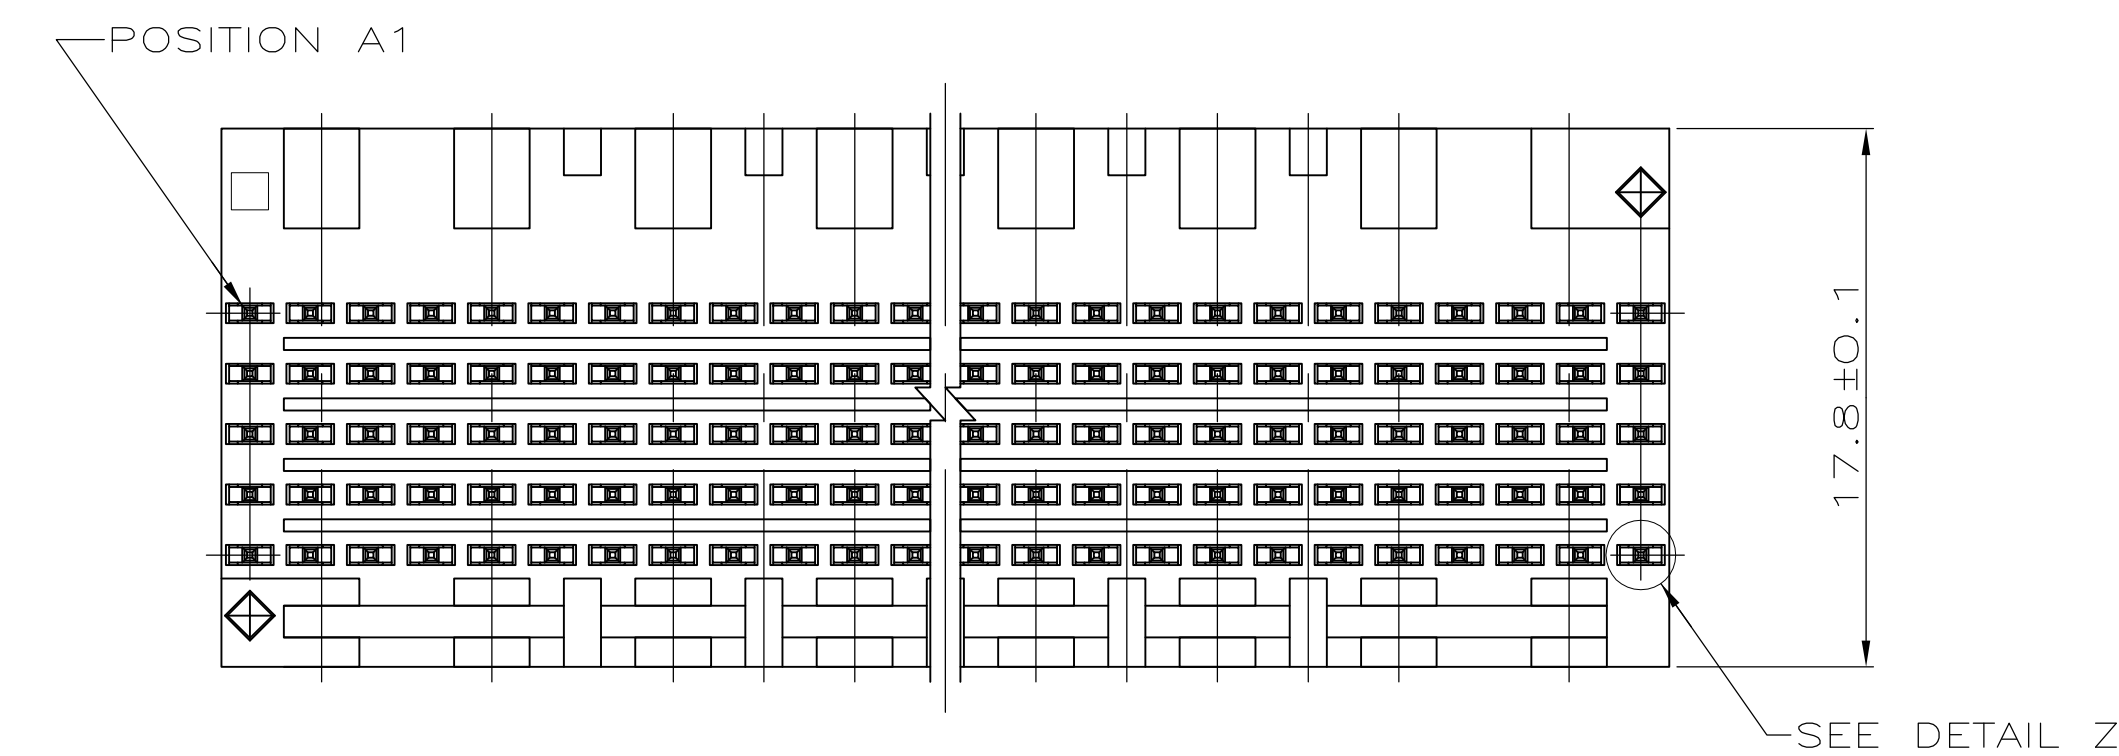
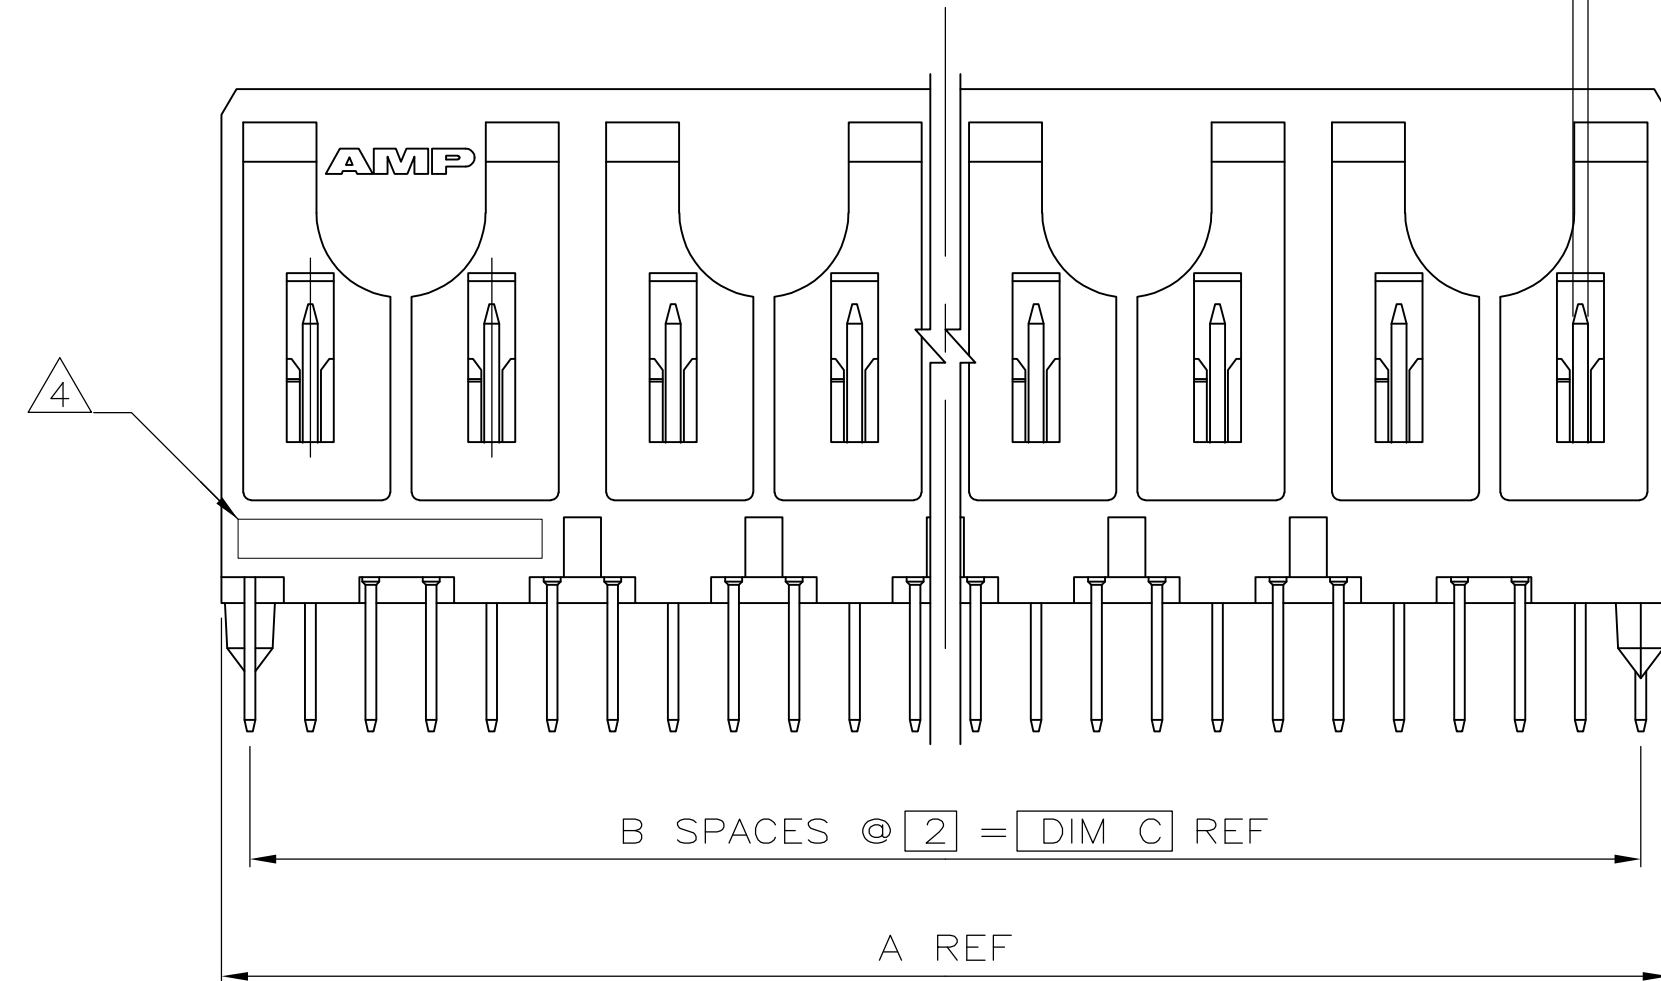
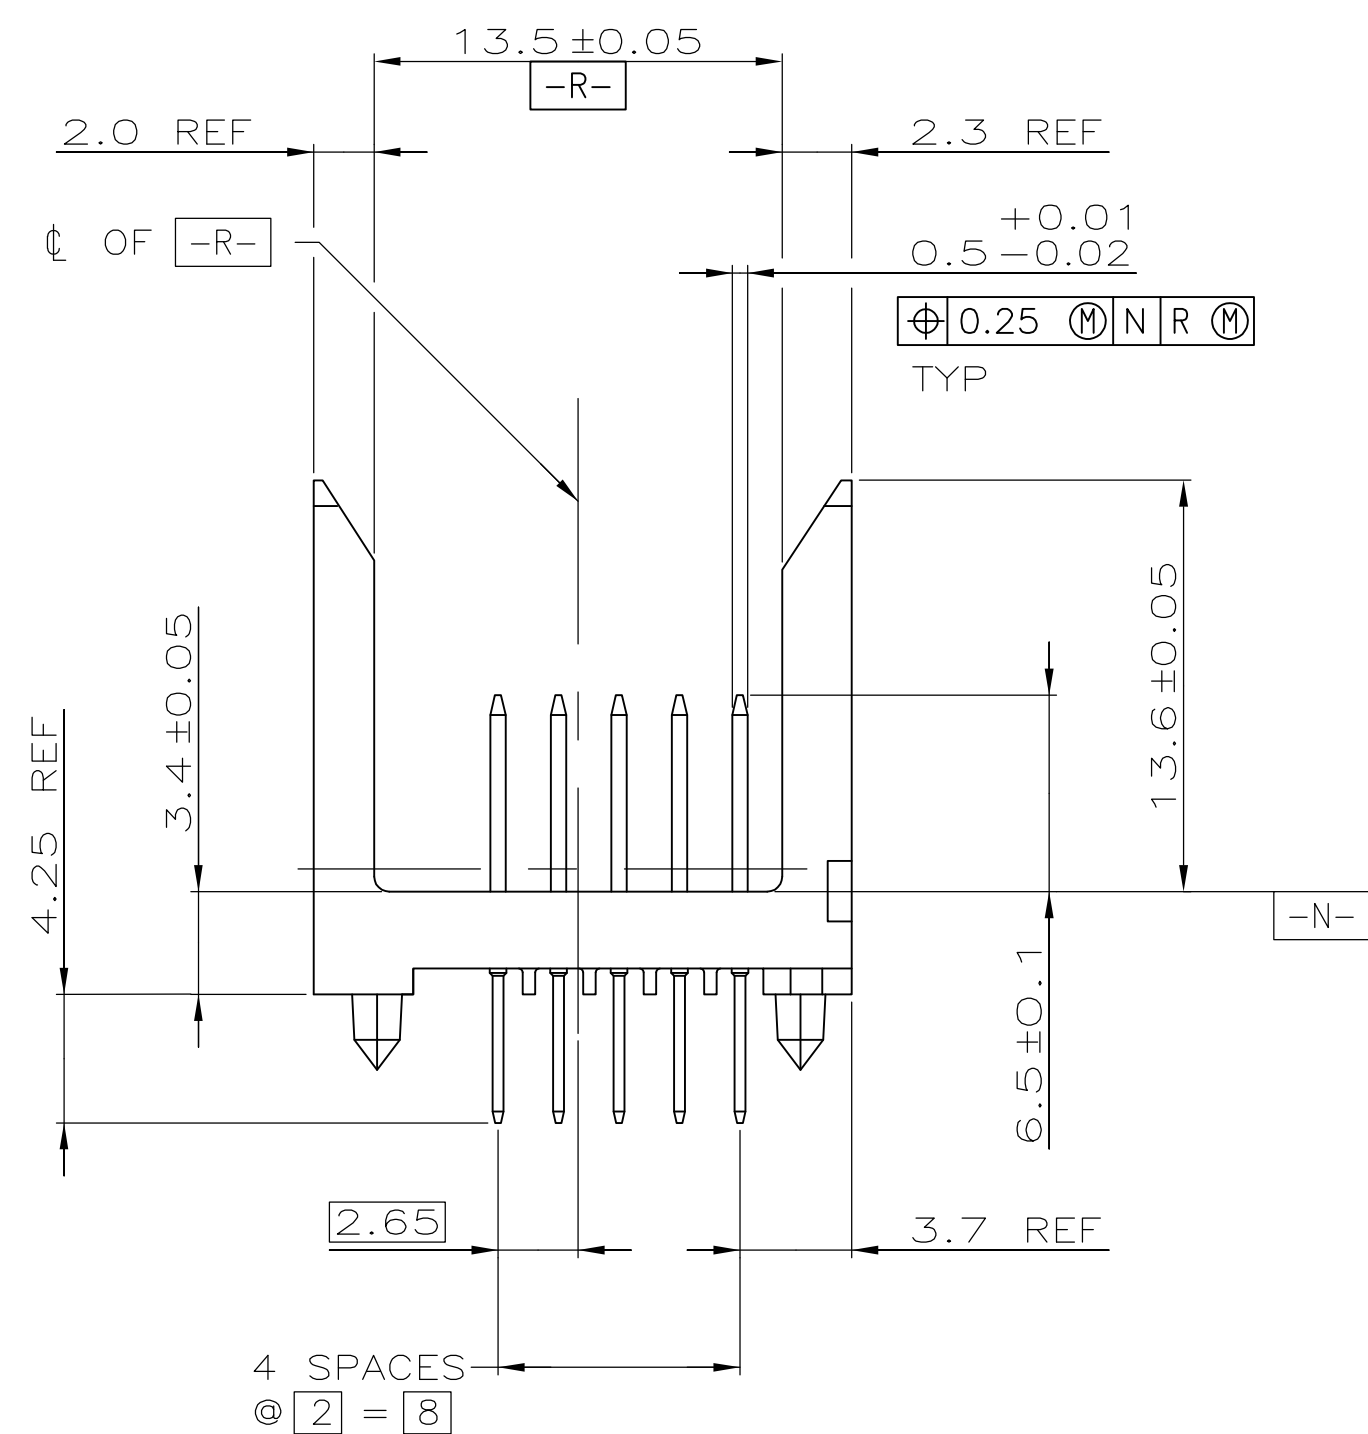
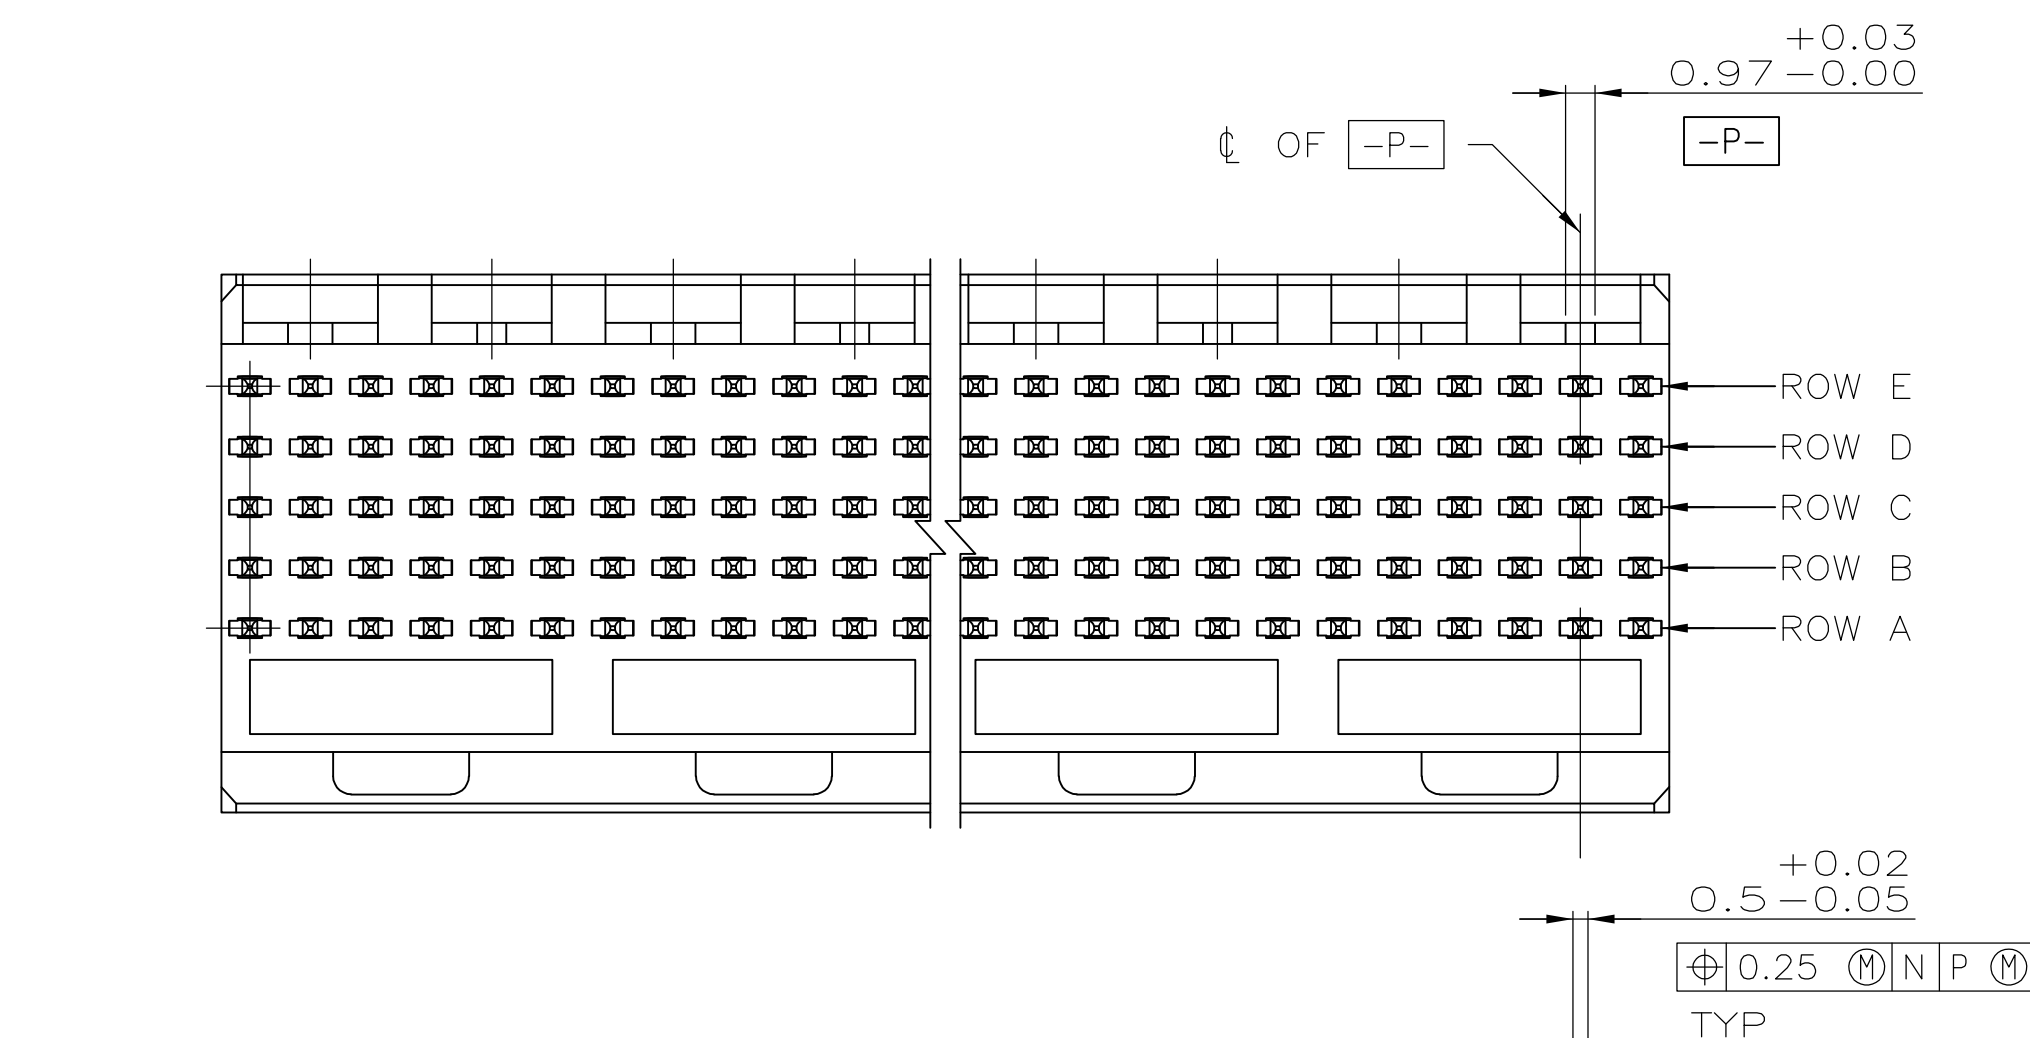


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			H1	REVISED PER ECR-08-032448	19DEC2008	S.W	S.Y
			J	REVISED PER ECO-15-003999	13MAR15	D.S	F.Y

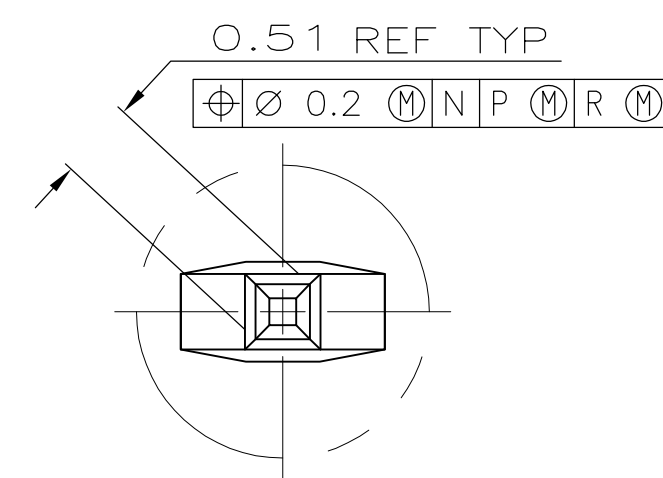

RECOMMENDED CIRCUIT PATTERN
(COMPONENT SIDE)

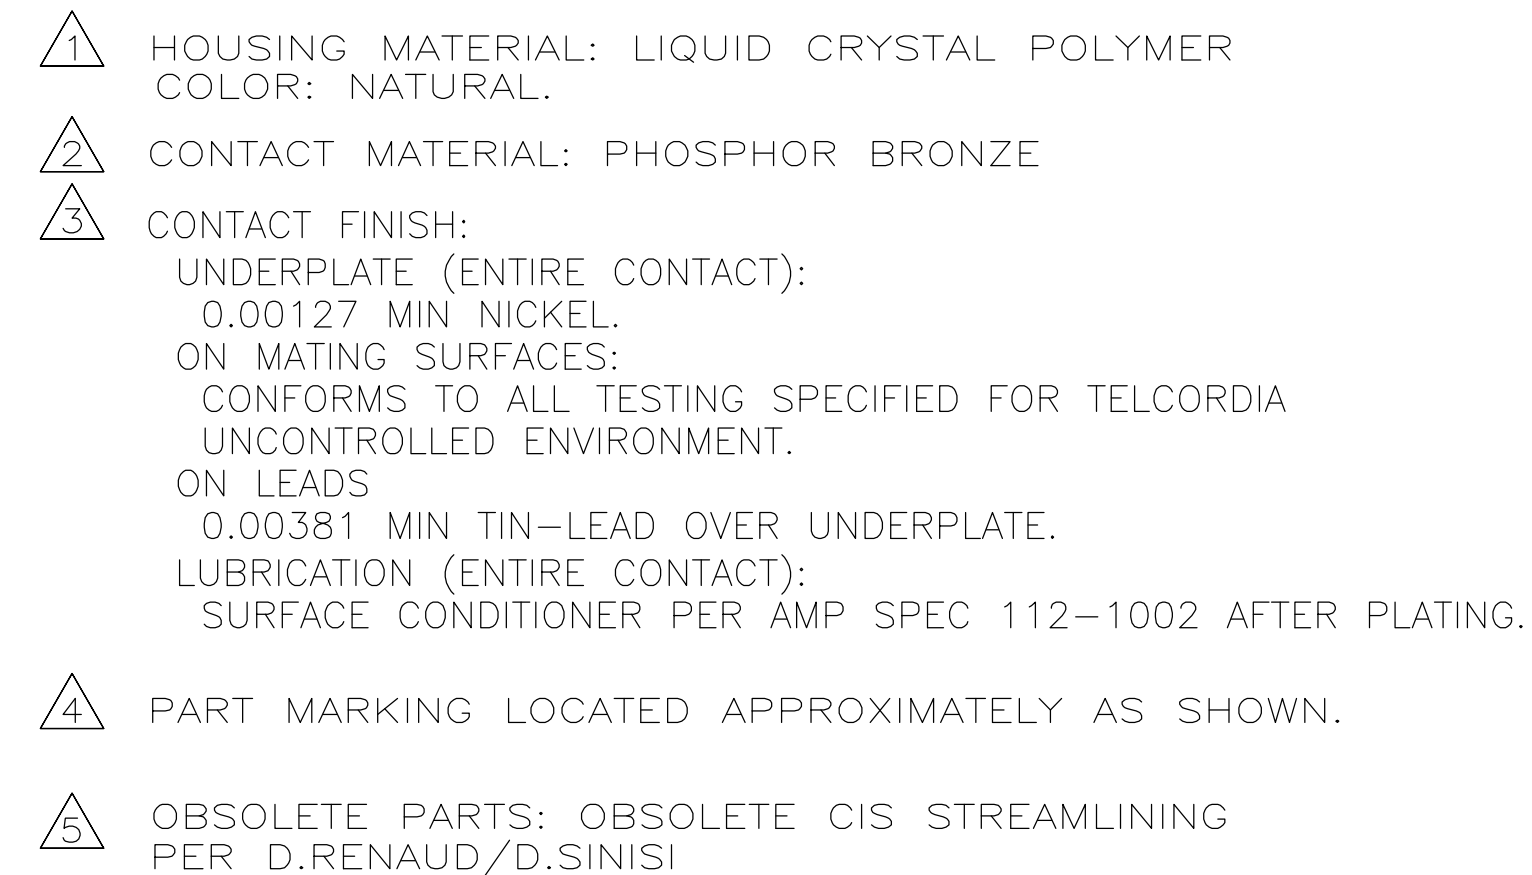

DETAIL Z
SCALE 20:1

5	OBSOLETE	130	65	131.88	3	330	4-223000-4
	OBSOLETE	118	59	119.88	3	300	1-223000-0
5	OBSOLETE	106	53	107.88	3	270	223000-9
	SUPERSEDED BY 5223000-8	94	47	95.88	3	240	223000-8
5	OBSOLETE	82	41	83.88	3	210	223000-7
	SUPERSEDED	70	35	71.88	3	180	223000-6
		58	29	59.88	3	150	223000-5
		46	23	47.88	3	120	223000-4
		34	17	35.88	3	90	223000-3
	OBSOLETE	22	11	23.88	3	60	223000-2
		10	5	11.88	3	30	223000-1
		C	B	A	FINISH	NO OF SIGNAL POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN <u>R. BUCHHEISTER</u> 10/JAN/96 QWK <u>D. BAECHTLE</u> 11/JAN/96 APP'D <u>D. SINISI</u> 11/JAN/96		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, PIN, SIGNAL, VERTICAL, Z-PACK 2mm FB, 5 ROW, SOLDER LEAD -	
		0 PLC ± - 1 PLC ± 0.13 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -			
MATERIAL		FINISH			
 					
		WEIGHT -		SIZE GAGE CODE DRAWING NO A1 00779 C=223000	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV. 0	