


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C1		REVISED PER ECO-11-005033	23MAR11	RK	HMR


Tooling Drawing NO.  
 USB A: TR00662  
 USB B: TR00664

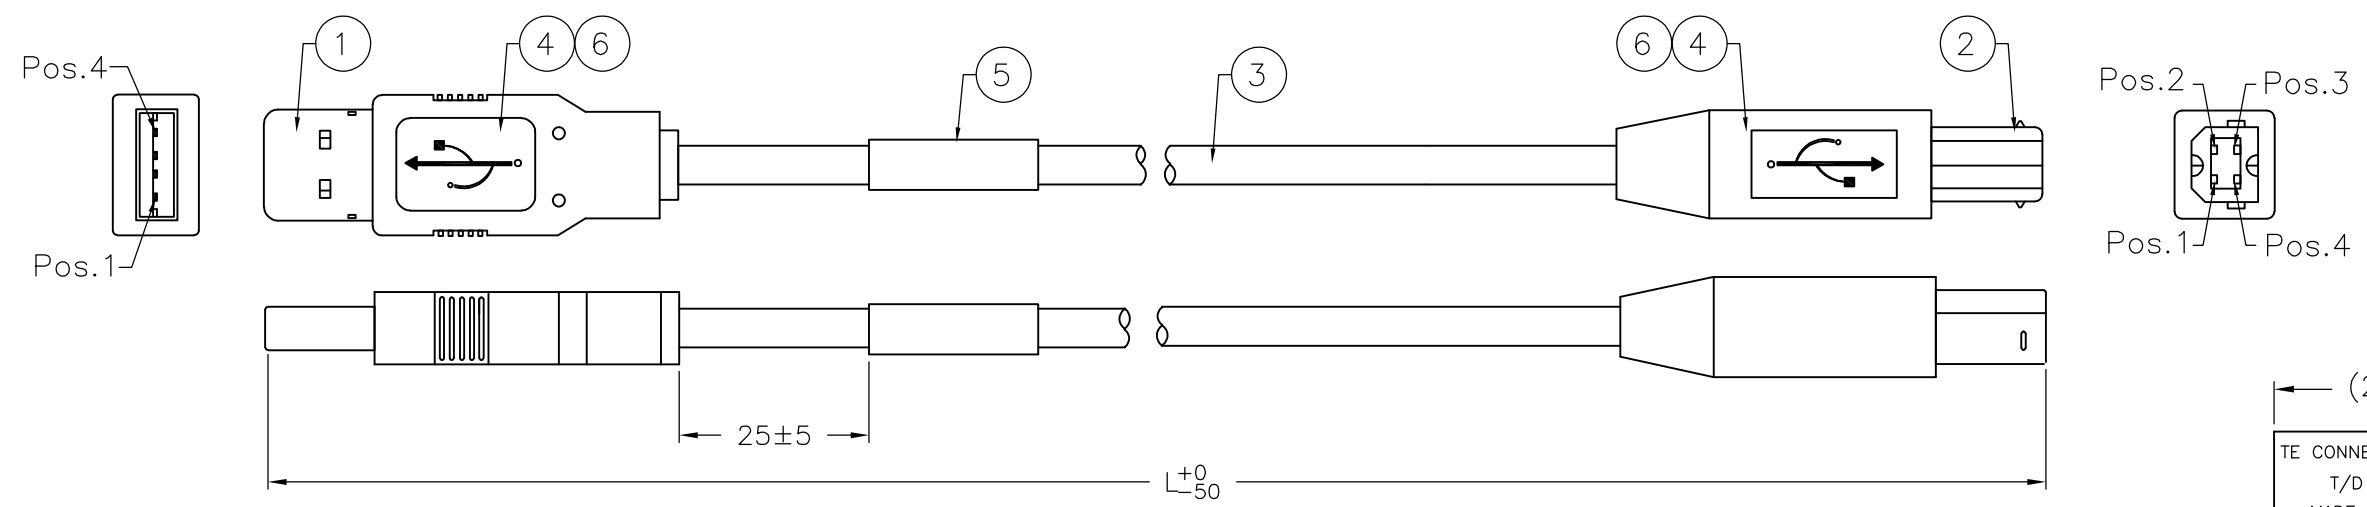

- NOTES:
1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 1700MM PER USB SPECIFICATIONS.
  5. MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

PART NO.	1487587-1	1487587-2	1487587-3
LENGTH(L)	1000	1300	830

PIN ASSIGNMENT :

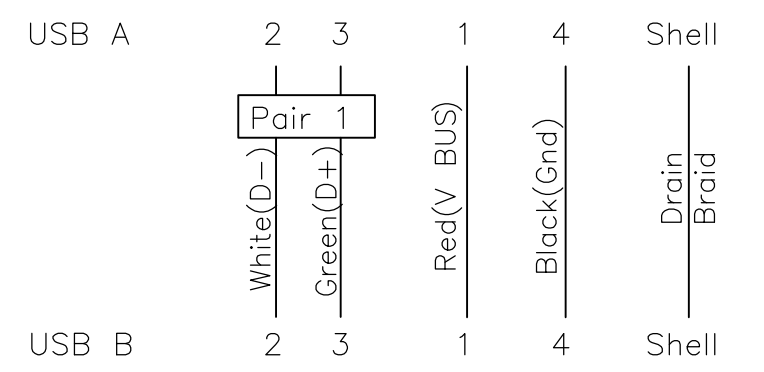

AR	AR	AR	MR	COPPER FOIL, W: 5MM, 360° SOLDER	6
1	1	1	PC	Lable, 25x35mm, White 25x13mm	5
AR	AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	4
AR	AR	AR	MR	USB 2.0 Cable 28AWG*1P+26AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	3
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-3	-2	-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BOVEY LIU 25FEB02	TE Connectivity USB A TYPE TO USB B TYPE CABLE ASSEMBLY				
DIMENSIONS: mm		CHK J.HUNT 25FEB02				NAME	RESTRICTED TO
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.HUNT 25FEB02				PRODUCT SPEC	
MATERIAL		PRODUCT SPEC				APPLICATION SPEC	
FINISH		WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-1487587		
CUSTOMER DRAWING			SCALE N.T.S	SHEET 1 OF 1	REV C1		