
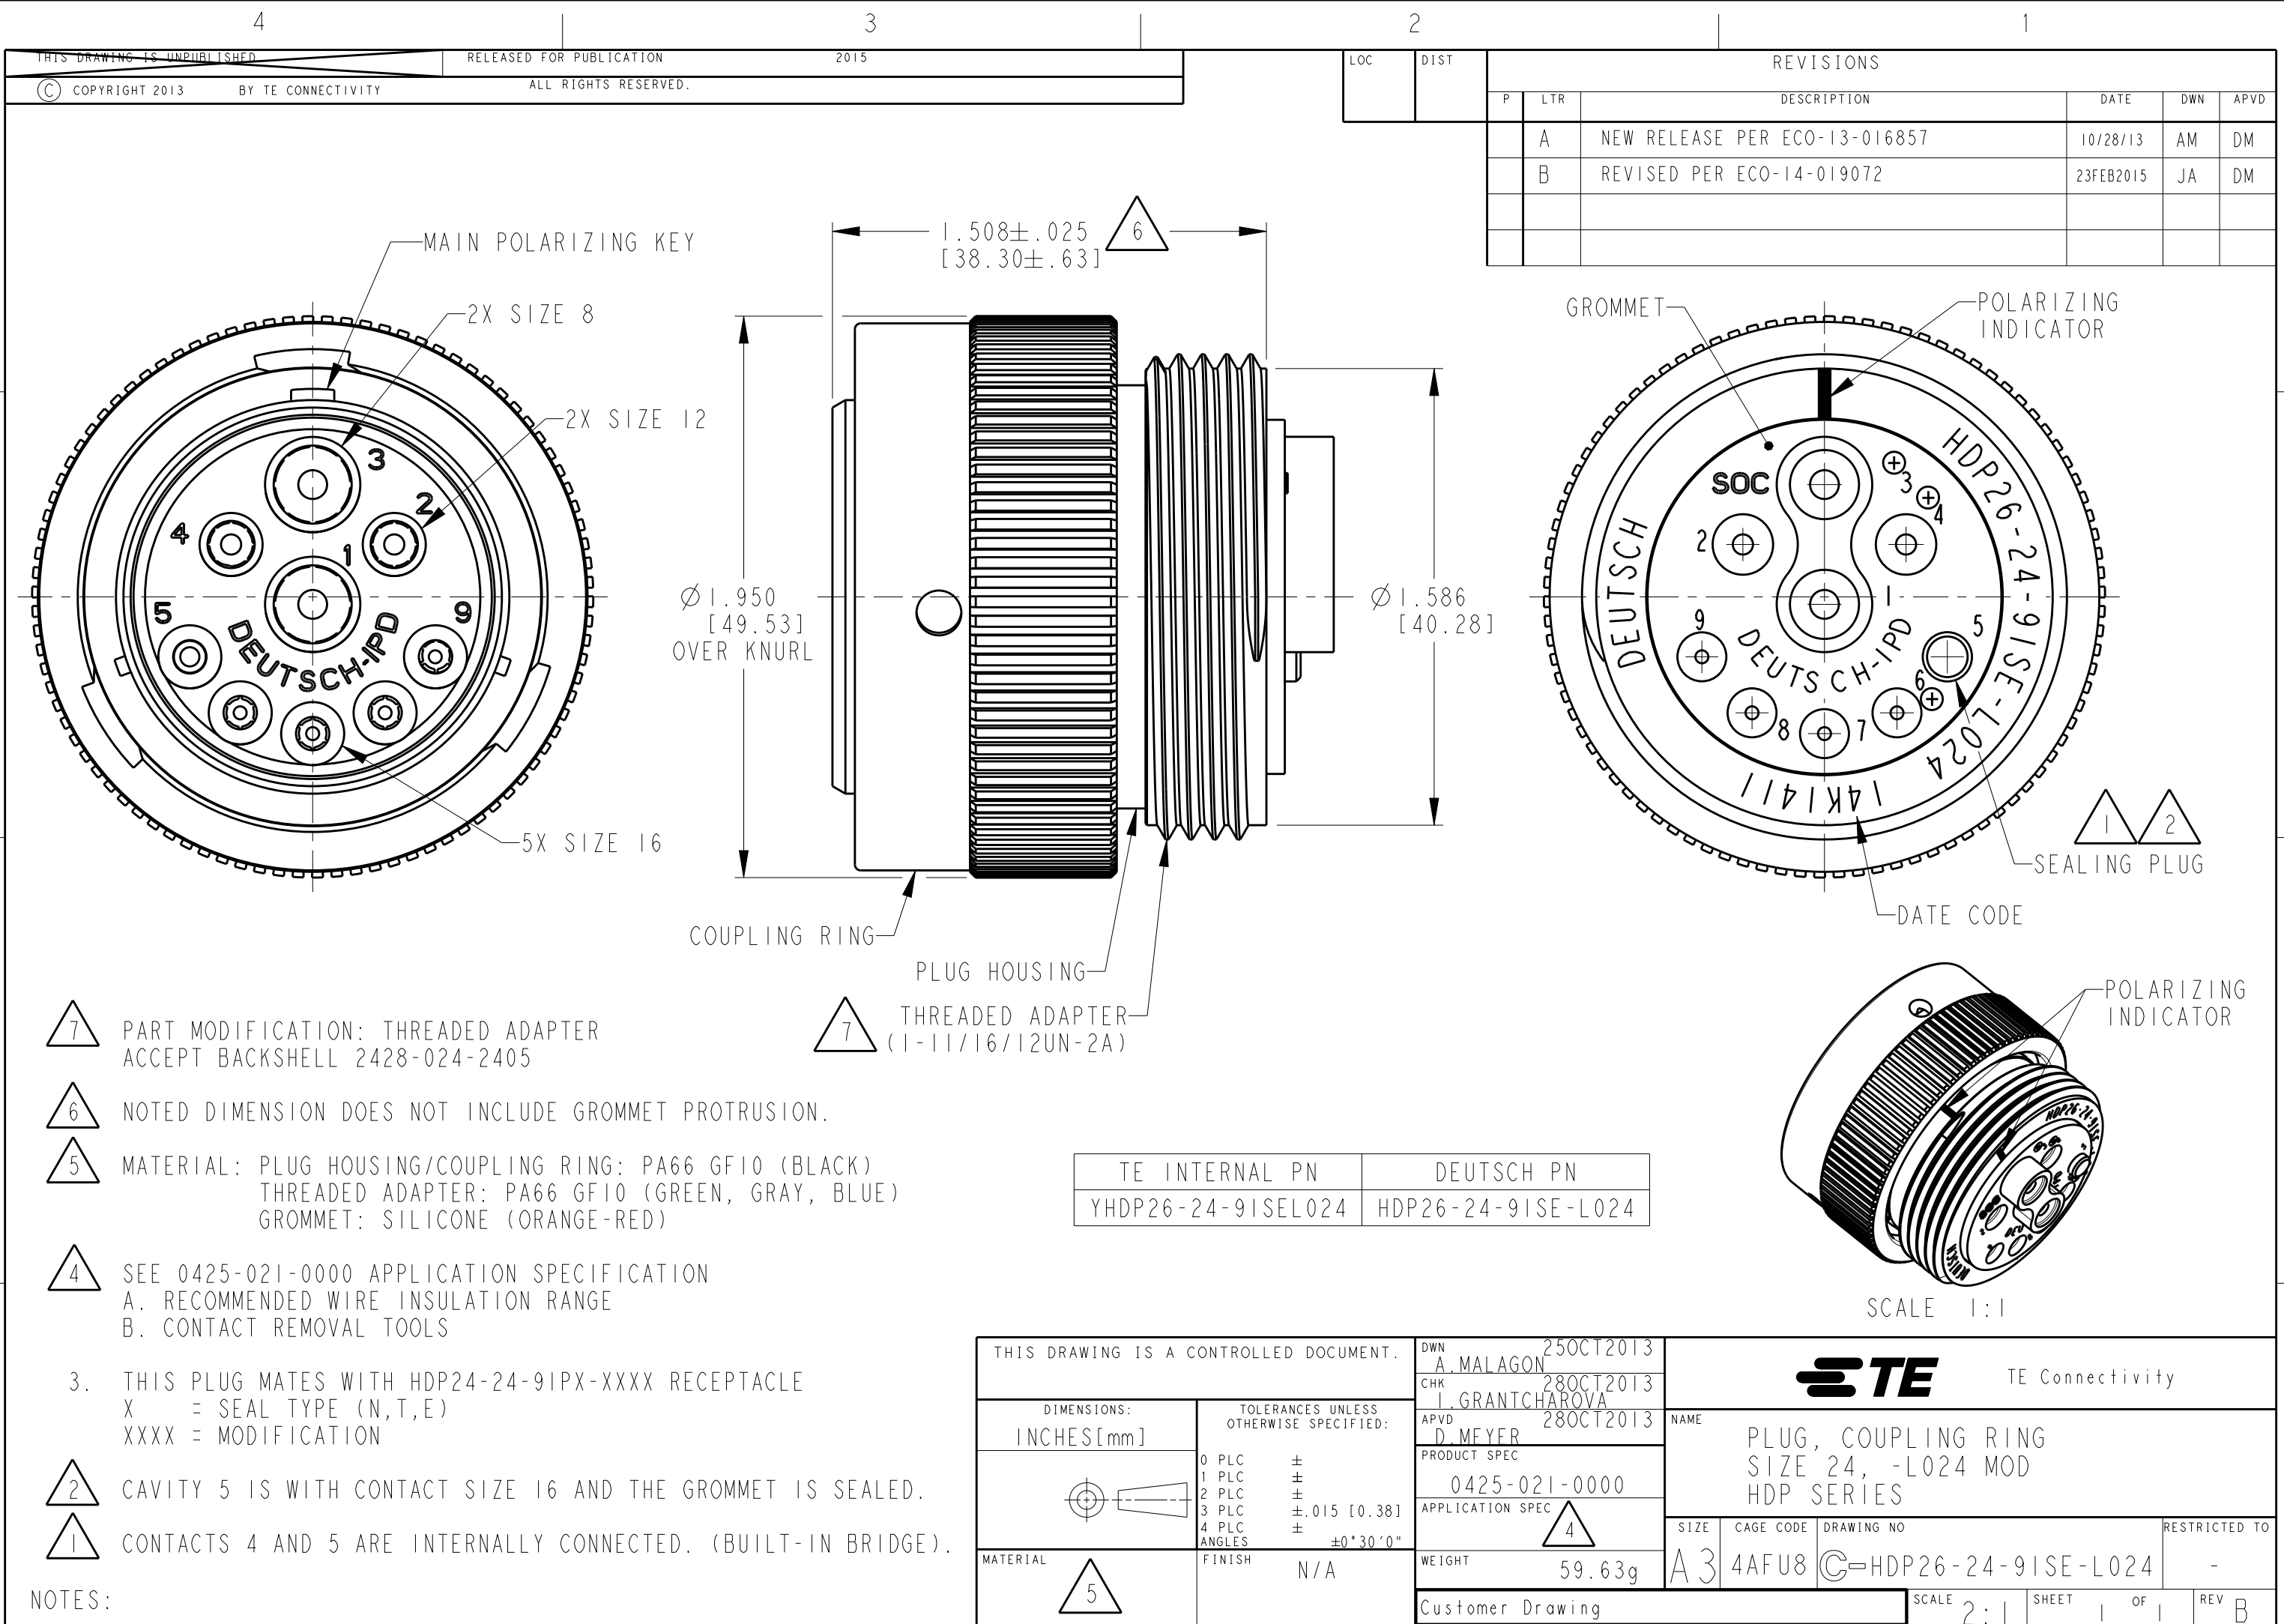




- 7 PART MODIFICATION: THREADED ADAPTER
ACCEPT BACKSHELL 2428-024-2405
- 6 NOTED DIMENSION DOES NOT INCLUDE GROMMET PROTRUSION.
- 5 MATERIAL: PLUG HOUSING/COUPLING RING: PA66 GF10 (BLACK)
THREADED ADAPTER: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)
- 4 SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS
3. THIS PLUG MATES WITH HDP24-24-9IPX-XXXX RECEPTACLE
X = SEAL TYPE (N,T,E)
XXXX = MODIFICATION
- 2 CAVITY 5 IS WITH CONTACT SIZE 16 AND THE GROMMET IS SEALED.
- 1 CONTACTS 4 AND 5 ARE INTERNALLY CONNECTED. (BUILT-IN BRIDGE).

NOTES:

TE INTERNAL PN	DEUTSCH PN
YHDP26-24-9ISE-L024	HDP26-24-9ISE-L024

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. MALAGON 25OCT2013	TE Connectivity						
DIMENSIONS: INCHES[mm]		CHK I. GRANTCHAROVA 28OCT2013							
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. MEYER 28OCT2013	NAME PLUG, COUPLING RING SIZE 24, -L024 MOD HDP SERIES					
	0 PLC ±		PRODUCT SPEC						
	1 PLC ±		0425-021-0000						
	2 PLC ±		APPLICATION SPEC						
3 PLC ±.015 [0.38]			SIZE A3						
4 PLC ±									
ANGLES ±0°30'0"		WEIGHT 59.63g	CAGE CODE 4AFU8		DRAWING NO G-HDP26-24-9ISE-L024		RESTRICTED TO -		
MATERIAL 	FINISH N/A	Customer Drawing				SCALE 2:1	SHEET 1	OF 1	REV B