
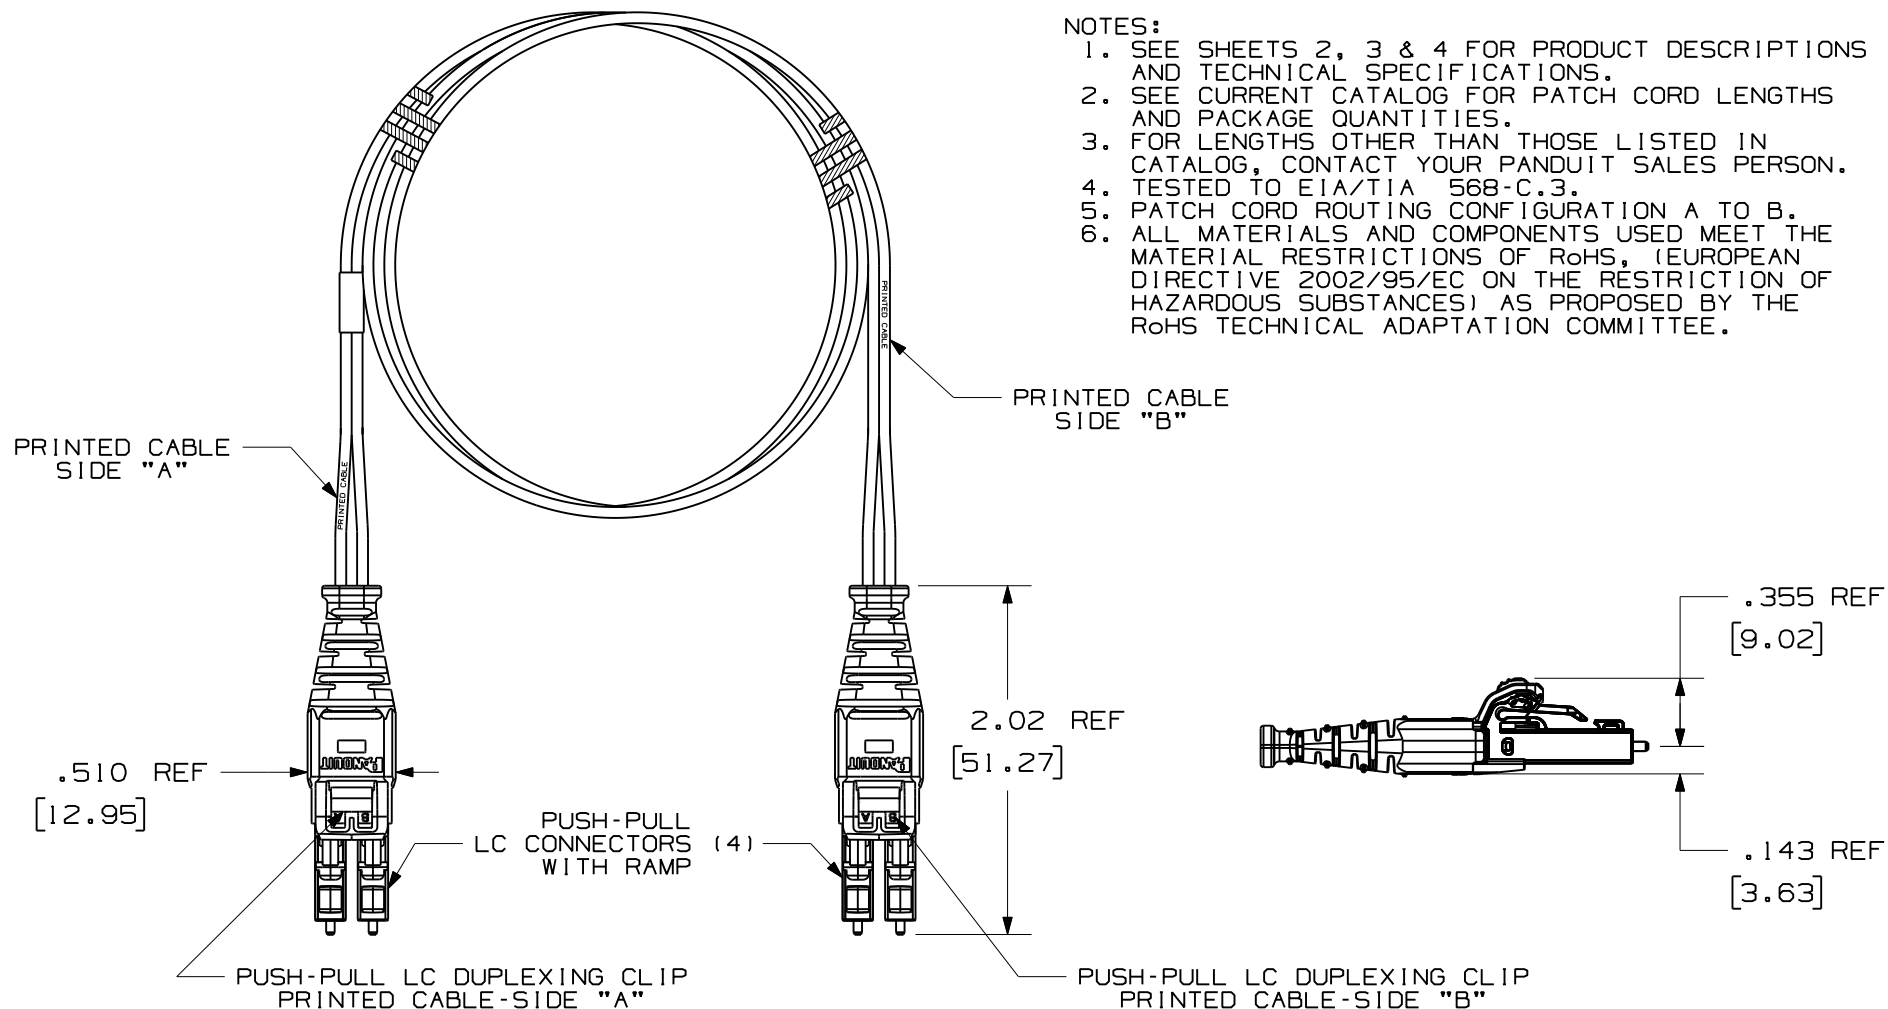


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE SHEETS 2, 3 & 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-C.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.



										FIBER OPTIC PATCH CORD DUPLEX LC PUSH-PULL TO LC PUSH-PULL CUSTOMER DRAWING		
										 PANDUIT TM CORP. TINLEY PARK, ILL 60477		
										 THIRD ANGLE PROJECTION		
										ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (0.3) (.XX) ±.03 (0.8) ANGLES		
										DRAWING FILENAME 10F119BE_DC/00A		
										SCALE NONE		
										PART NO. SEE SHEETS 2, 3 & 4		
										DRAWING NO. 10F119BE-DC		
										SHEET 1 OF 4		
										SIZE A		
REV	DATE	BY	CHK	DESCRIPTION		ECN	R	CUST	SUP	OTH		
R	10-12-12	SAT	PJI	RELEASED TO PRODUCTION		10F119BE-DC						





