

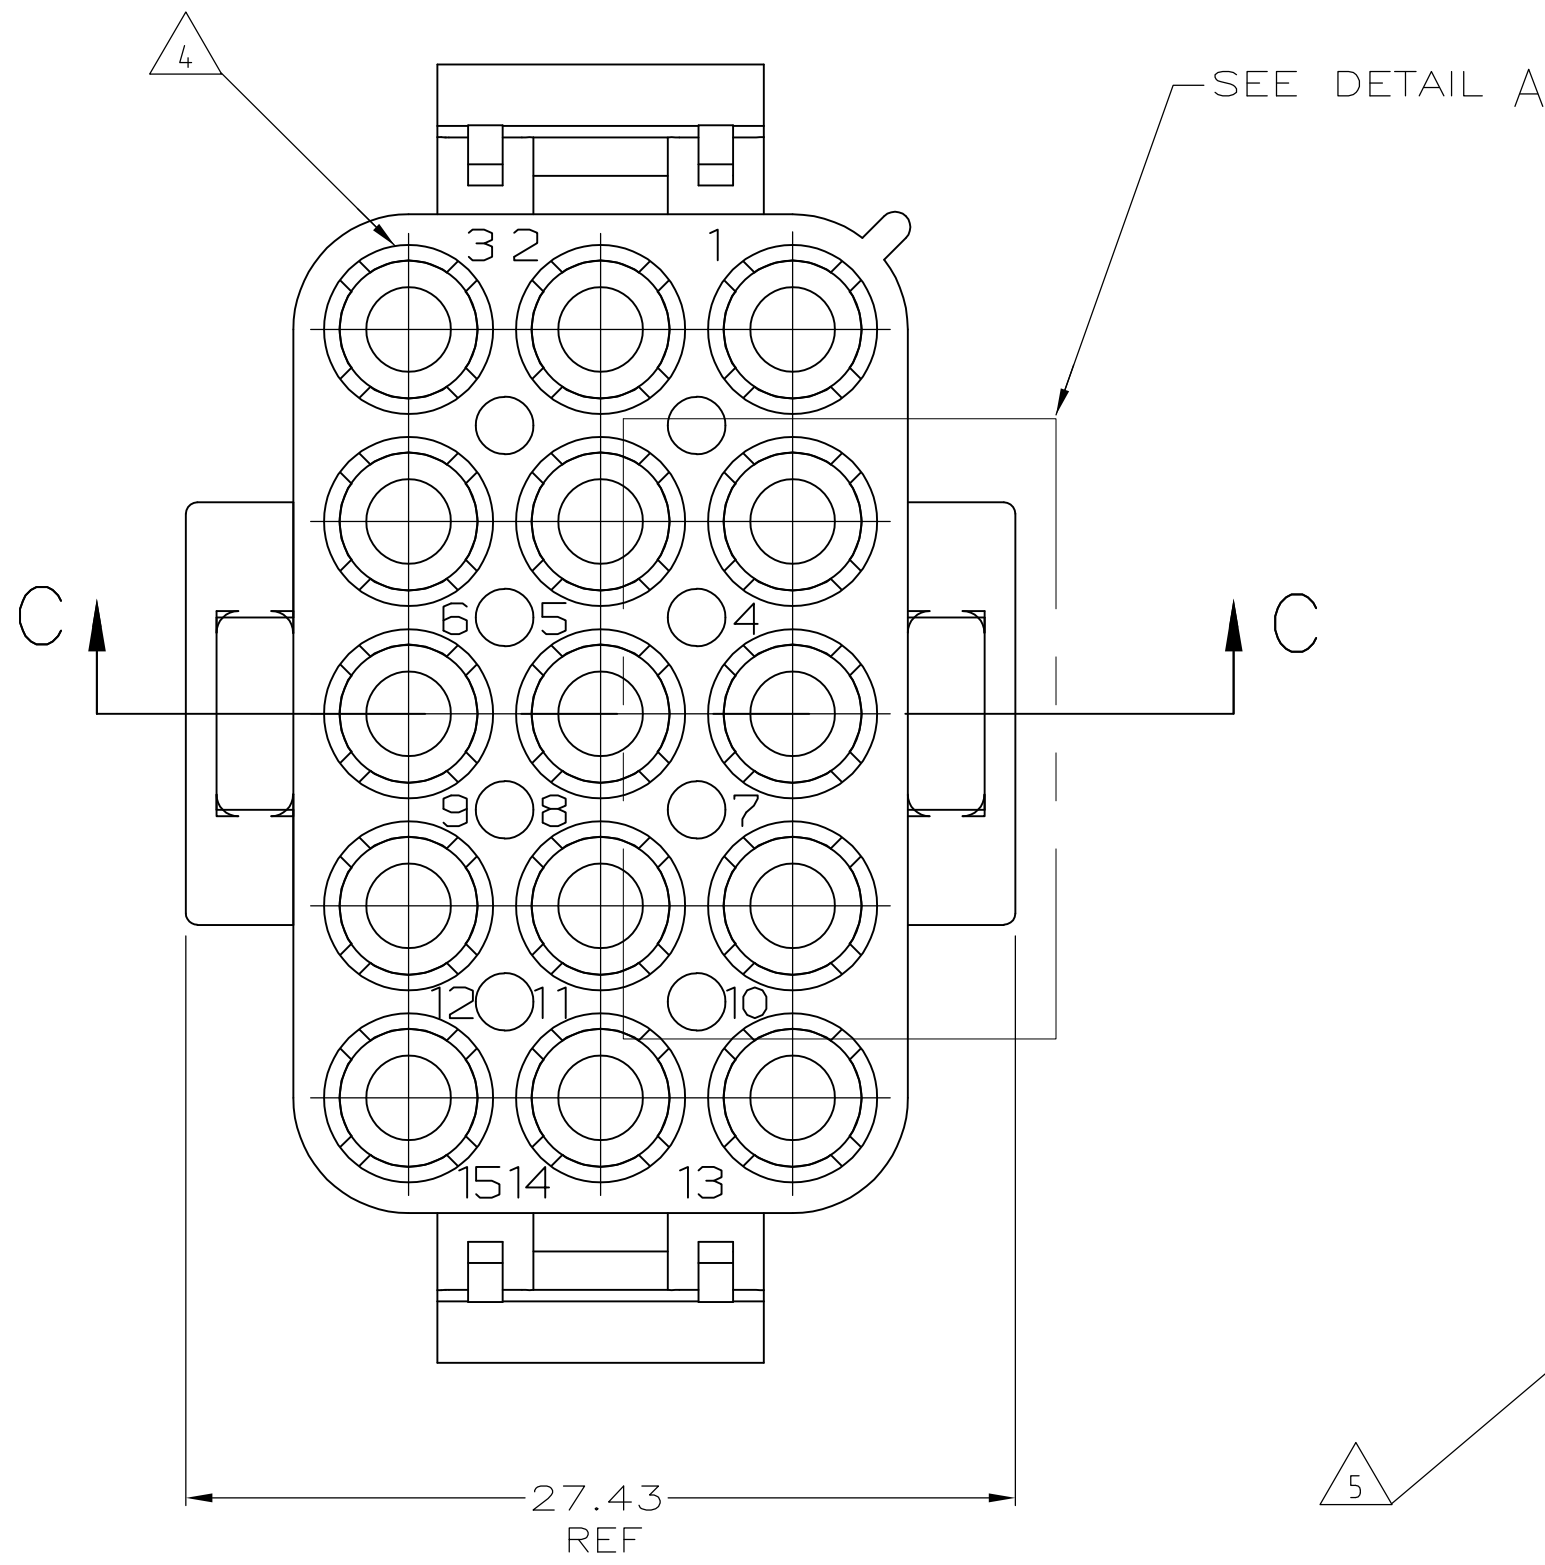


REVISIONS					
REV	LTR	DESCRIPTION	DATE	DWN	APVD
B1		REVISED PER ECO-17-011927	22AUG2017	RS	KR

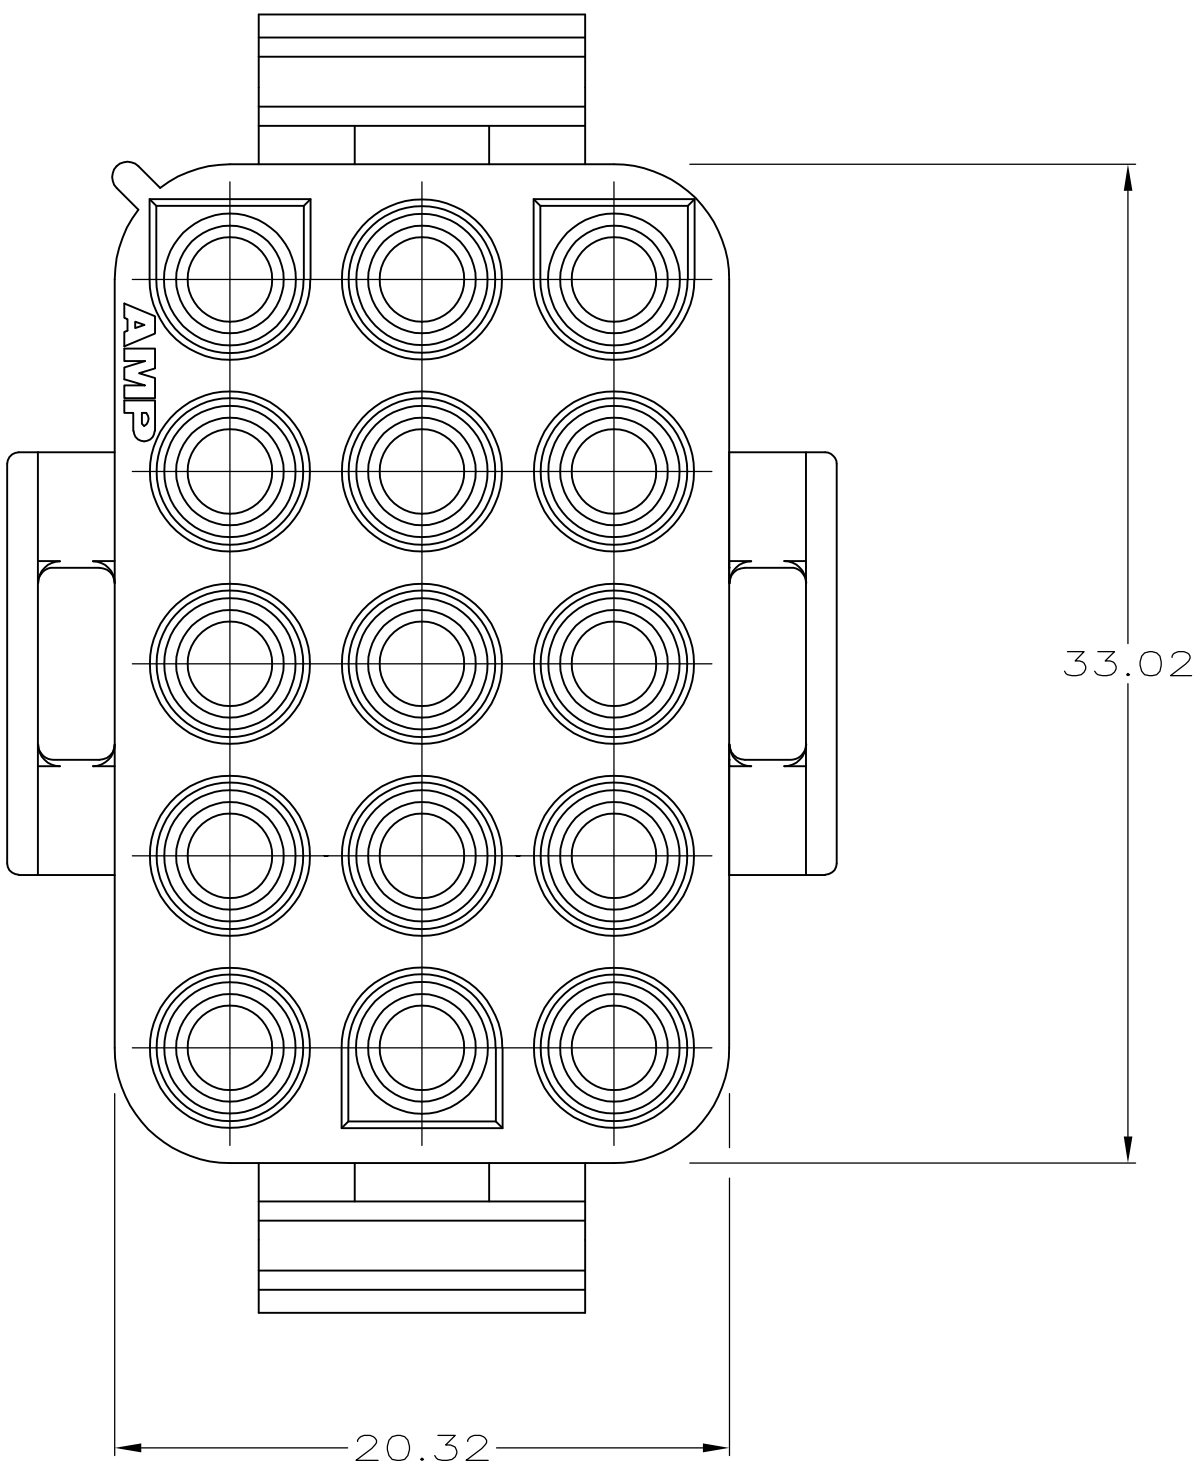


SEE DETAIL A


5

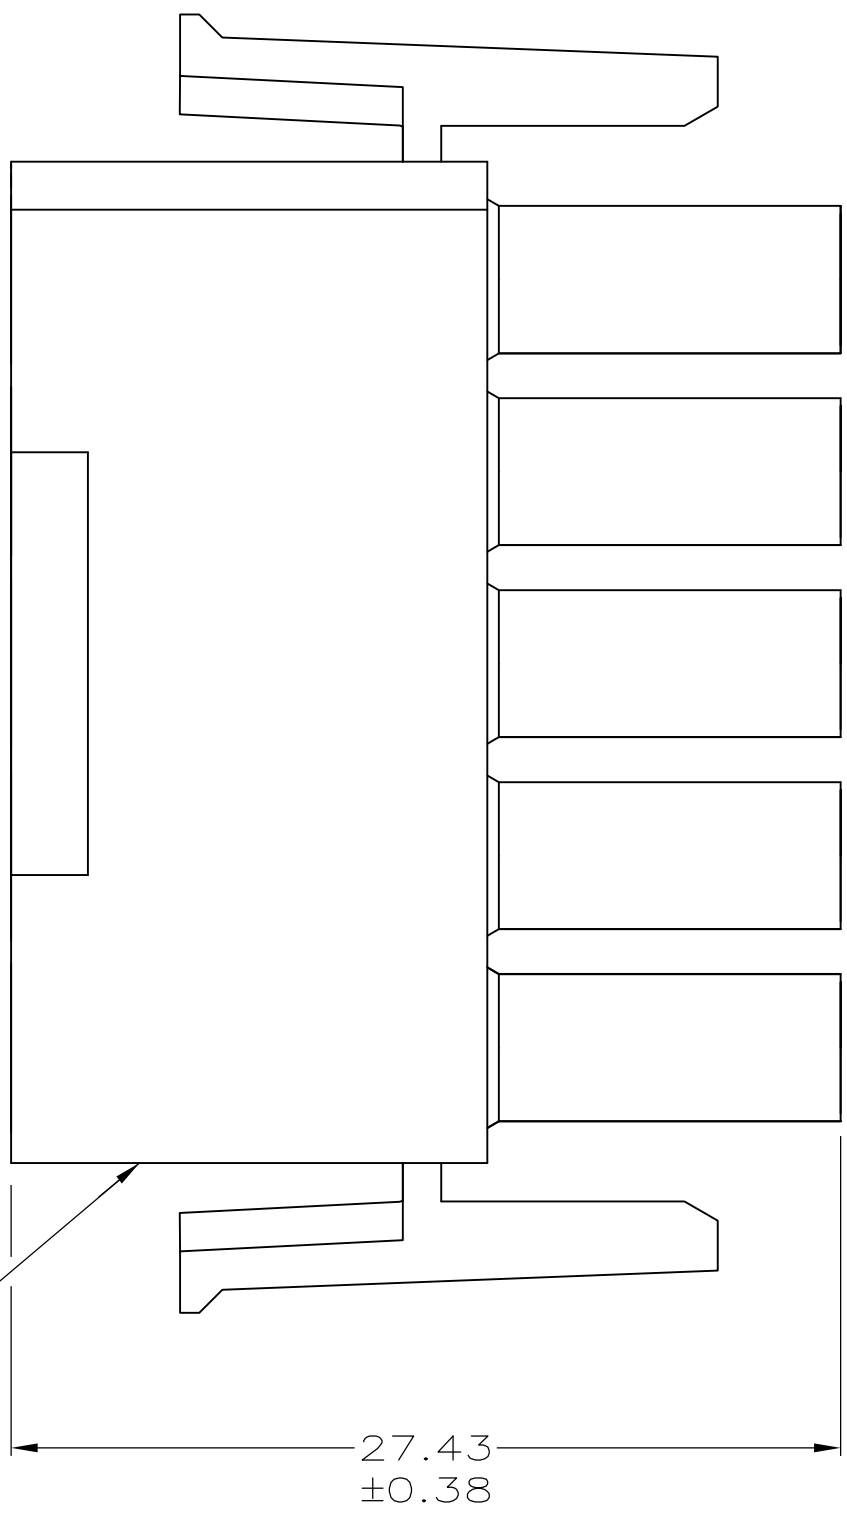

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
- SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS (1.0 LBS). NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS (.5 LBS).
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- UNDERWRITES RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH SIDE OF HOUSING.
- PHOSPHOR BRONZE CONTACTS SHOULD ALWAYS BE USED WITH THIS HOUSING


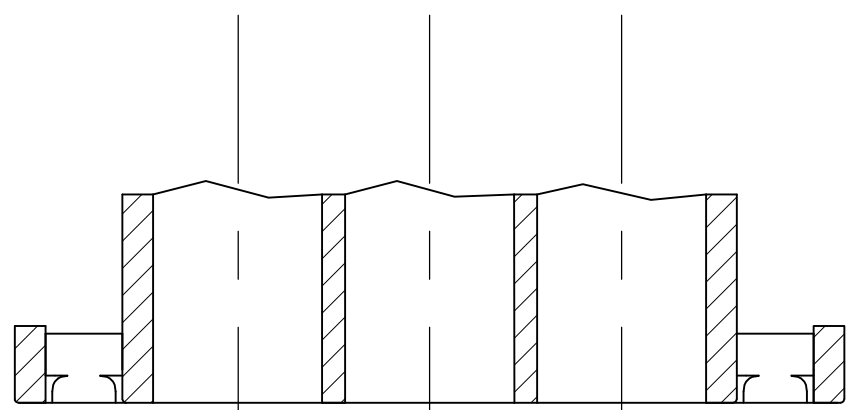


PARTIAL SECTION C-C

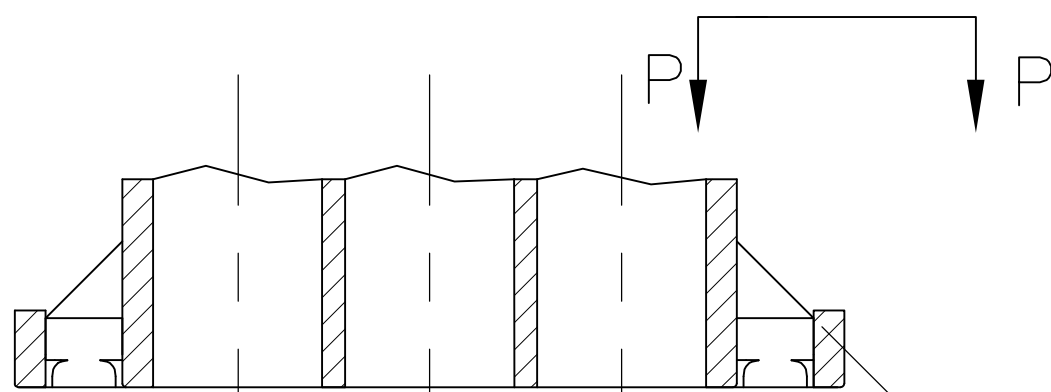

PARTIAL SECTION C-C
OPTIONAL CONSTRUCTION

45°
REF

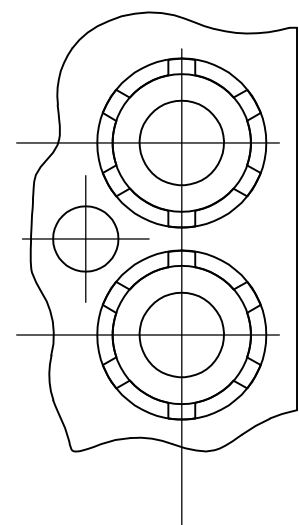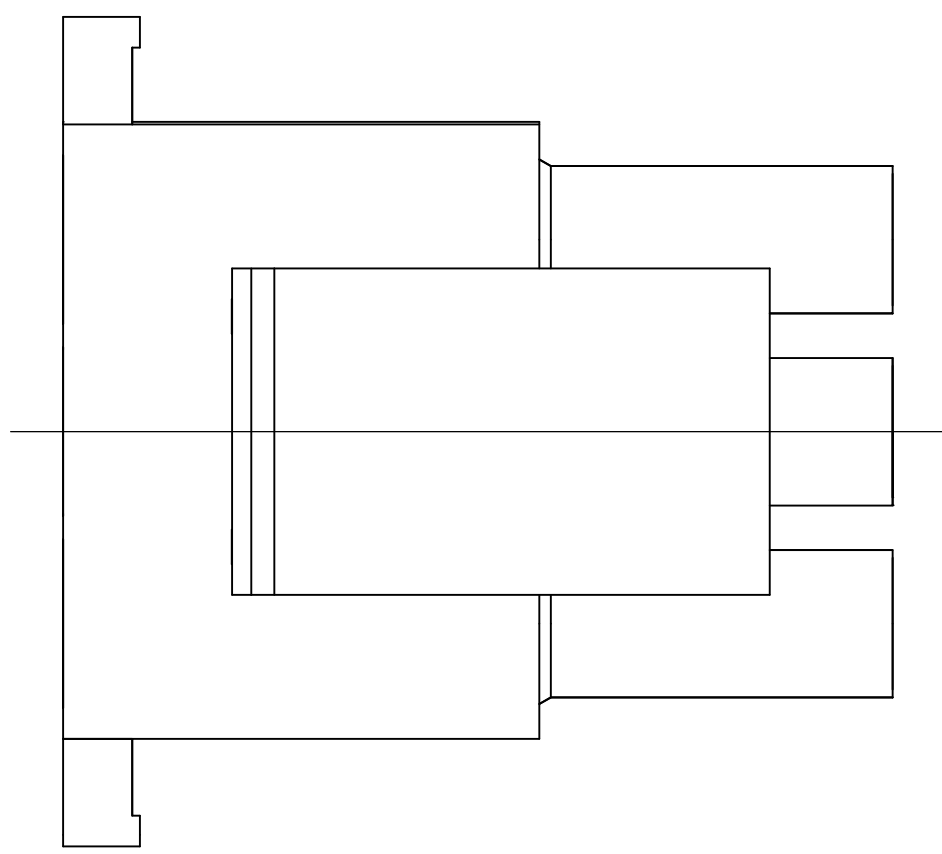

PARTIAL DETAIL A
OPTIONAL CONSTRUCTIONS

4

VIEW P
OPTIONAL CONSTRUCTIONS

2.41
REF

33.02	1.300
27.43	1.080
20.32	.800
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. McEACHIN 14-JAN-2000		
		CHK M. TRULL 14-JAN-2000		
		APVD M. TRULL PRODUCT SPEC		
		APPLICATION SPEC		
		FINISH -		
MATERIAL NYLON, UL 94V-2, BLACK		WEIGHT 0.000000	A1 00779 C=794546	
		CUSTOMER DRAWING		
		SCALE 4:1	SHEET 1 OF 1	
		REV B1		



794546-1
PART NUMBER

TE Connectivity

PLUG,
15 CIRCUIT,
UNIVERSAL MATE-N-LOK™

RESTRICTED TO
-