


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

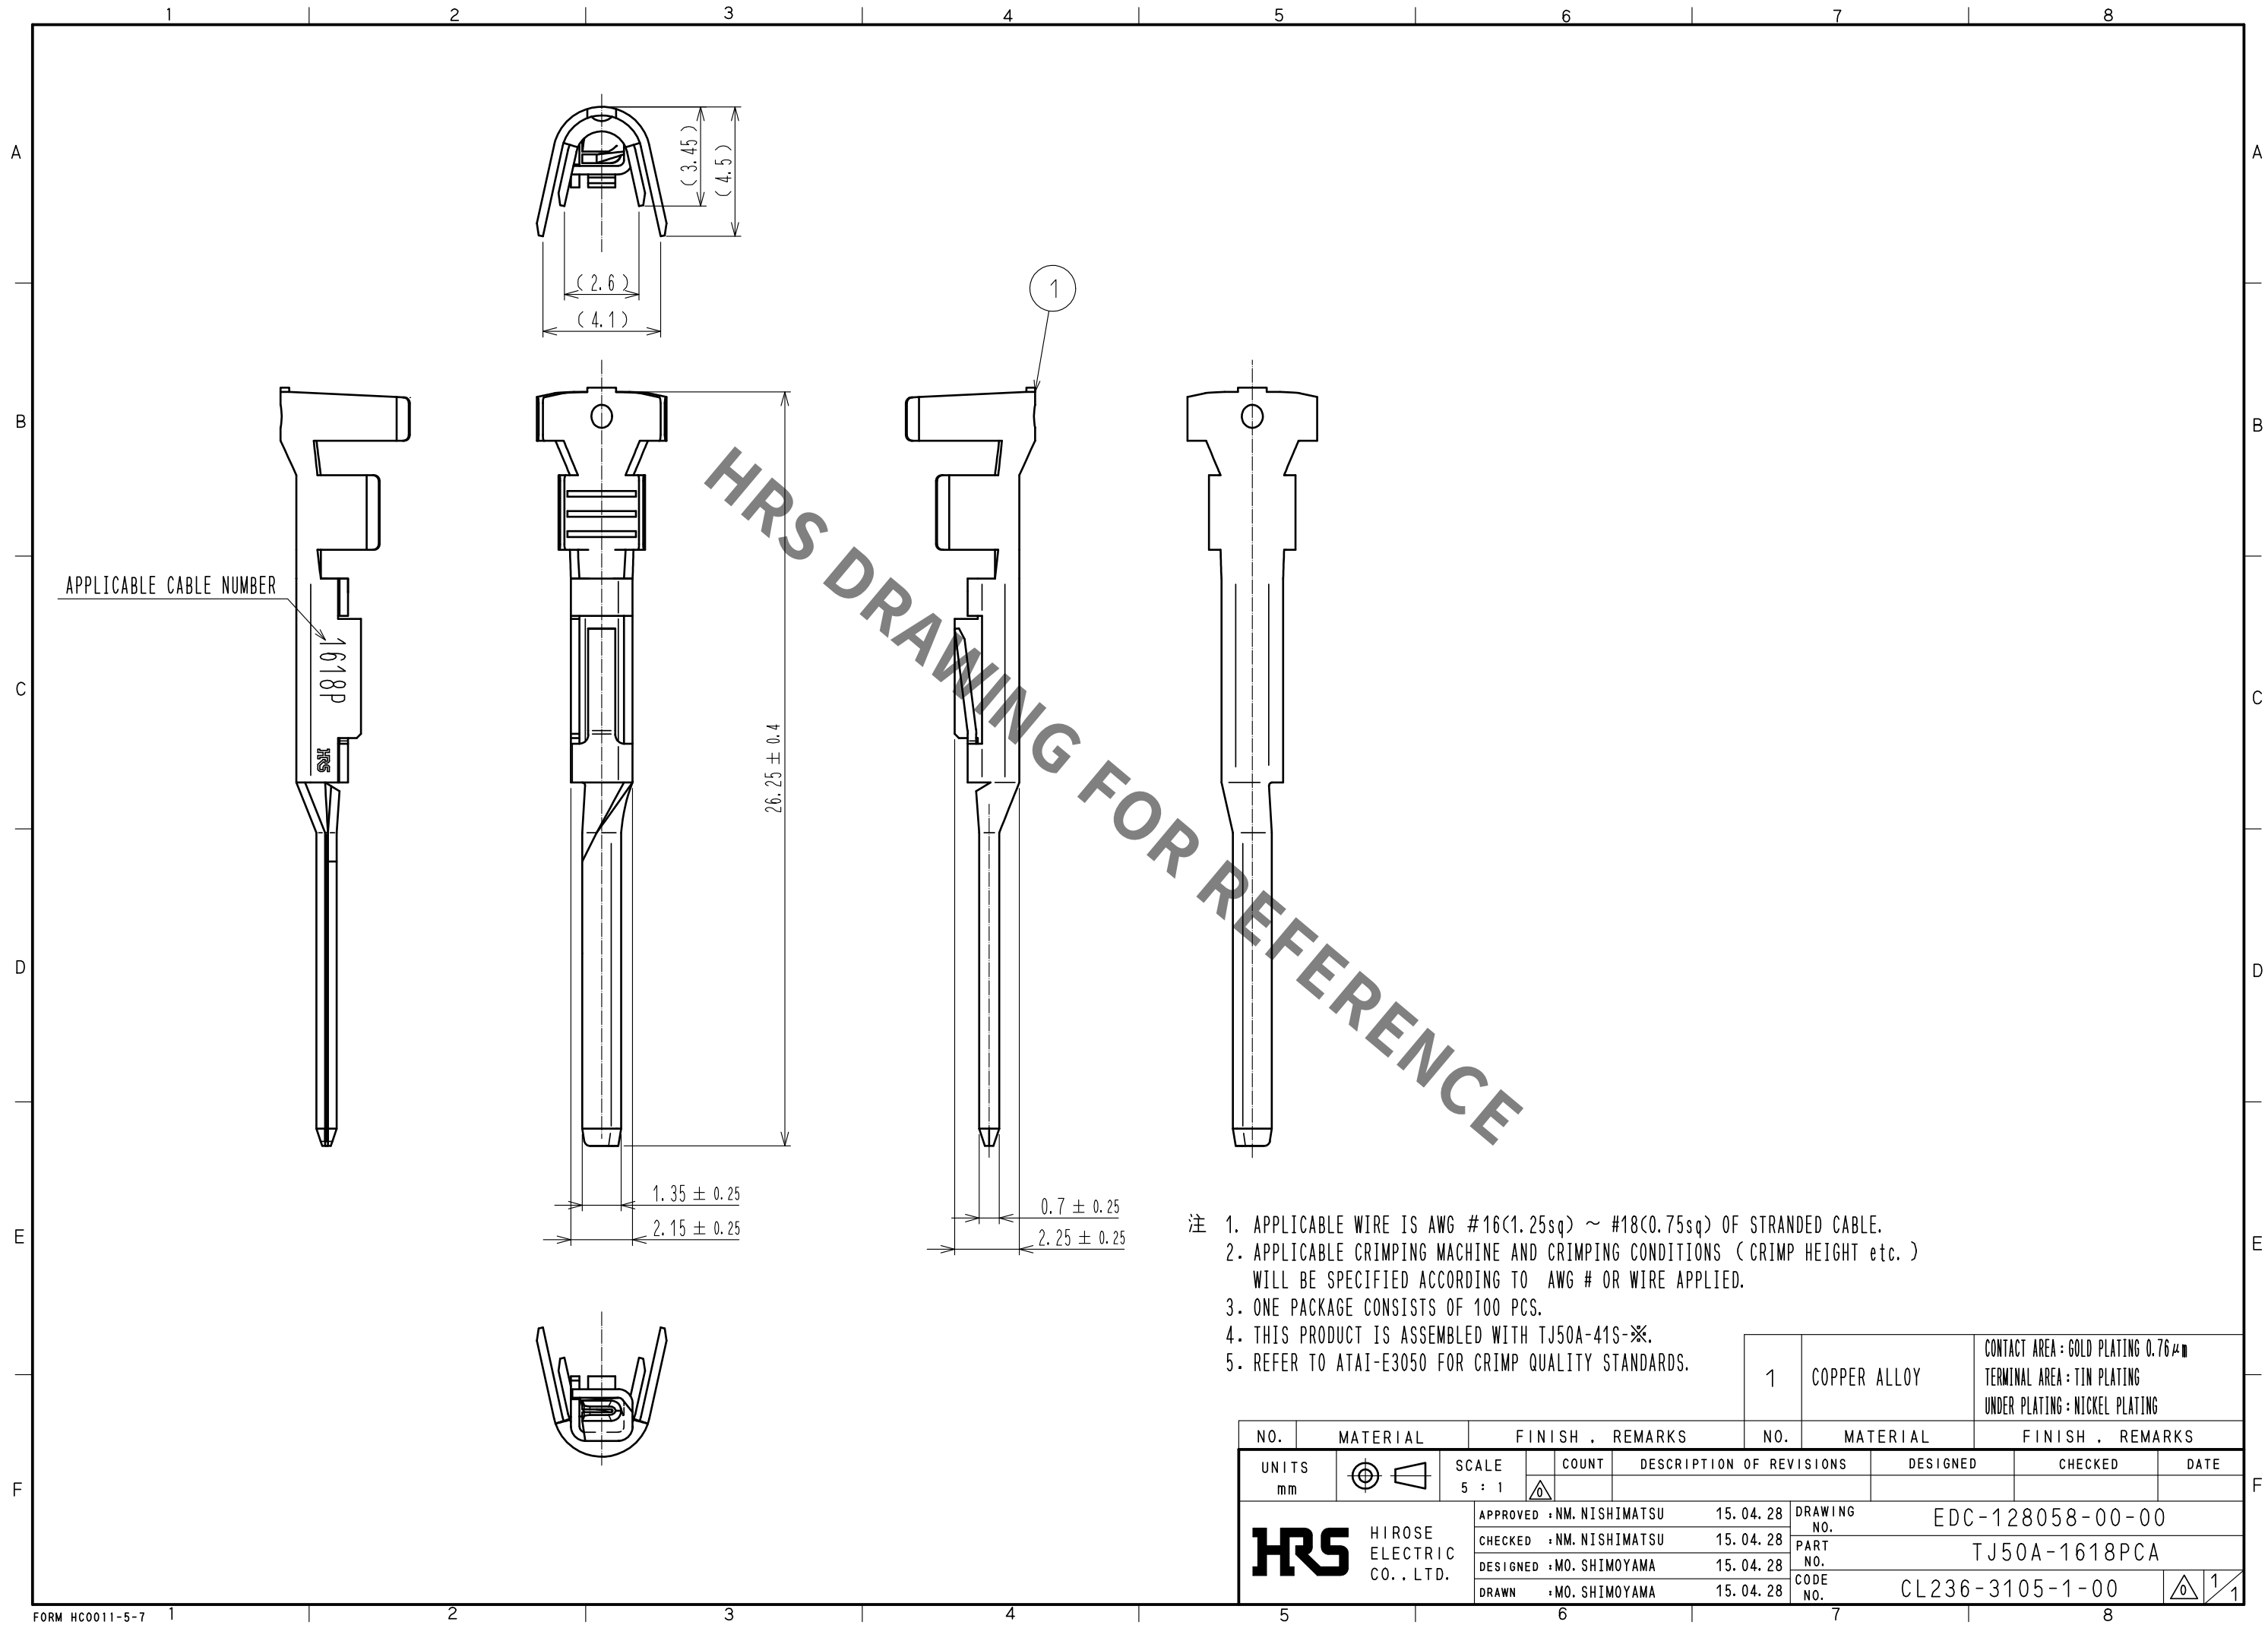

- 注 1. APPLICABLE WIRE IS AWG #16(1.25sq) ~ #18(0.75sq) OF STRANDED CABLE.
2. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS (CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO AWG # OR WIRE APPLIED.
3. ONE PACKAGE CONSISTS OF 100 PCS.
4. THIS PRODUCT IS ASSEMBLED WITH TJ50A-41S-※.
5. REFER TO ATAI-E3050 FOR CRIMP QUALITY STANDARDS.

THIS PRODUCT IS ASSEMBLED WITH TJ50A-41S-※.				1		COPPER ALLOY		CONTACT AREA : GOLD PLATING 0.76μm TERMINAL AREA : TIN PLATING UNDER PLATING : NICKEL PLATING			
. REFER TO ATAI-E3050 FOR CRIMP QUALITY STANDARDS.											
NO.	MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS		
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE
HIROSE ELECTRIC CO., LTD.			APPROVED	NM. NISHIMATSU	15. 04. 28	DRAWING NO.	EDC-128058-00-00				
			CHECKED	NM. NISHIMATSU	15. 04. 28	PART NO.	TJ50A-1618PCA				
			DESIGNED	MO. SHIMOYAMA	15. 04. 28	CODE NO.	CL236-3105-1-00				
			DRAWN	MO. SHIMOYAMA	15. 04. 28						
											1/1