

LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	DWN APVD
CM	00	AF2	REVISED	PER ECR-15-007412	20MAY15	SC DZ








- ⚠

NICKEL UNDER PLATE 0.00127 [0.000050] MIN THICK ON ENTIRE PART WITH 0.00076 [0.000030] MIN GOLD IN LOCALIZED PLATE AREA.
- 2

WIRE RANGE: 0.5 –2mm² (20–14 AWG).
- 3

INSULATION RANGE: 3.56 [.140] MAX. DIA.
- 4

DIMENSIONS IN BRACKETS ARE IN INCHES.

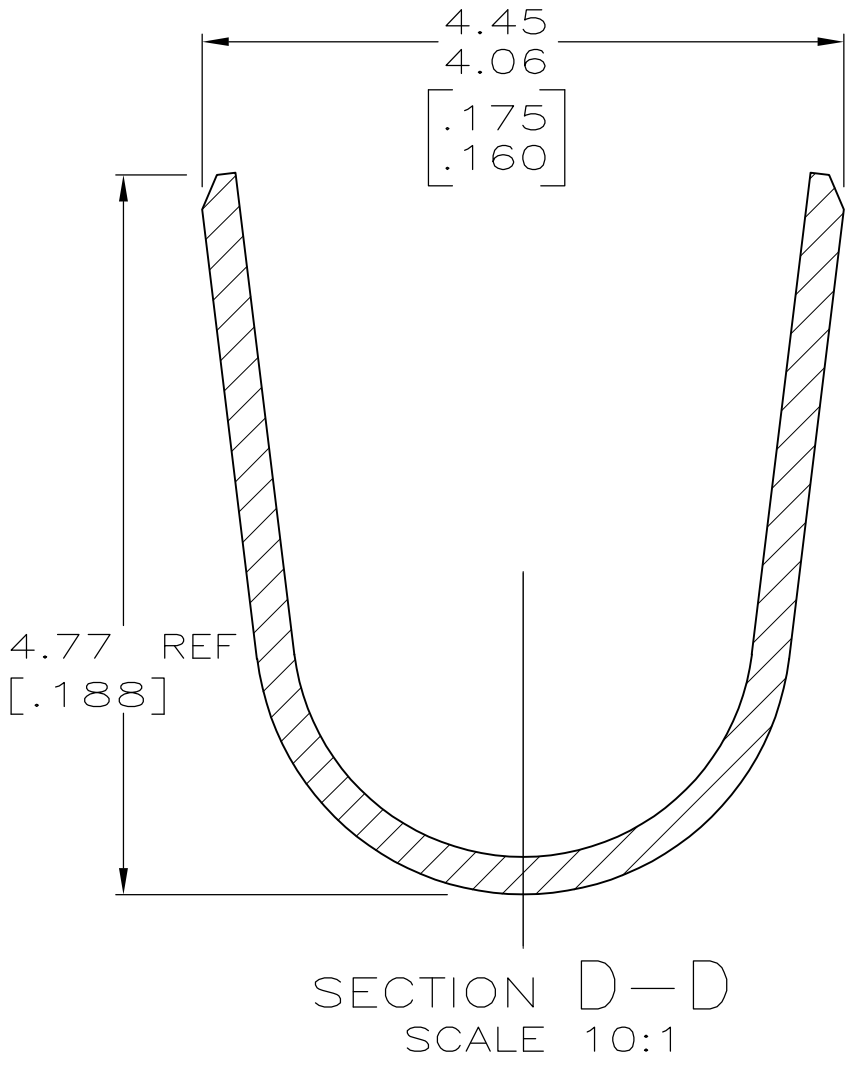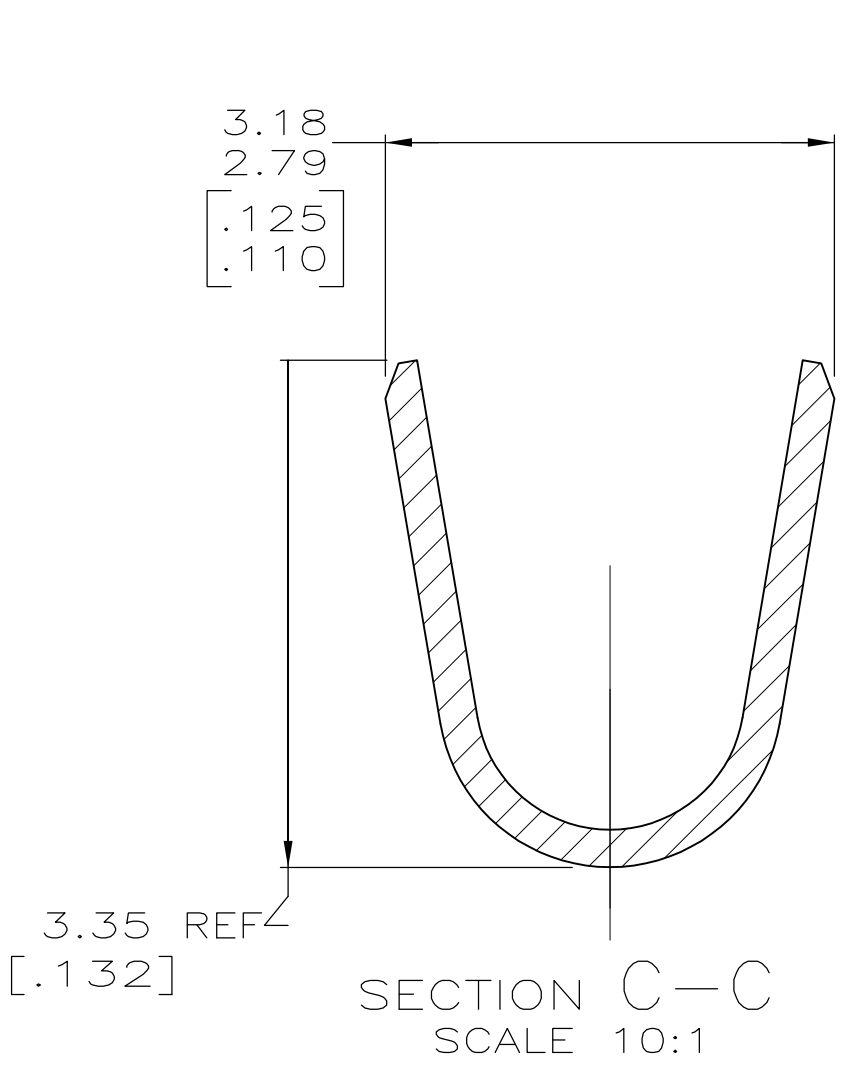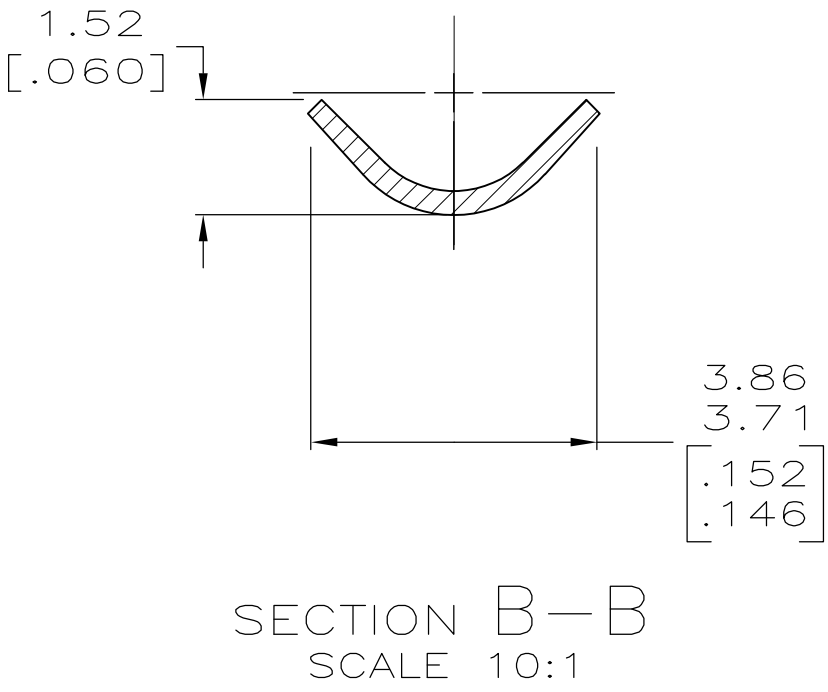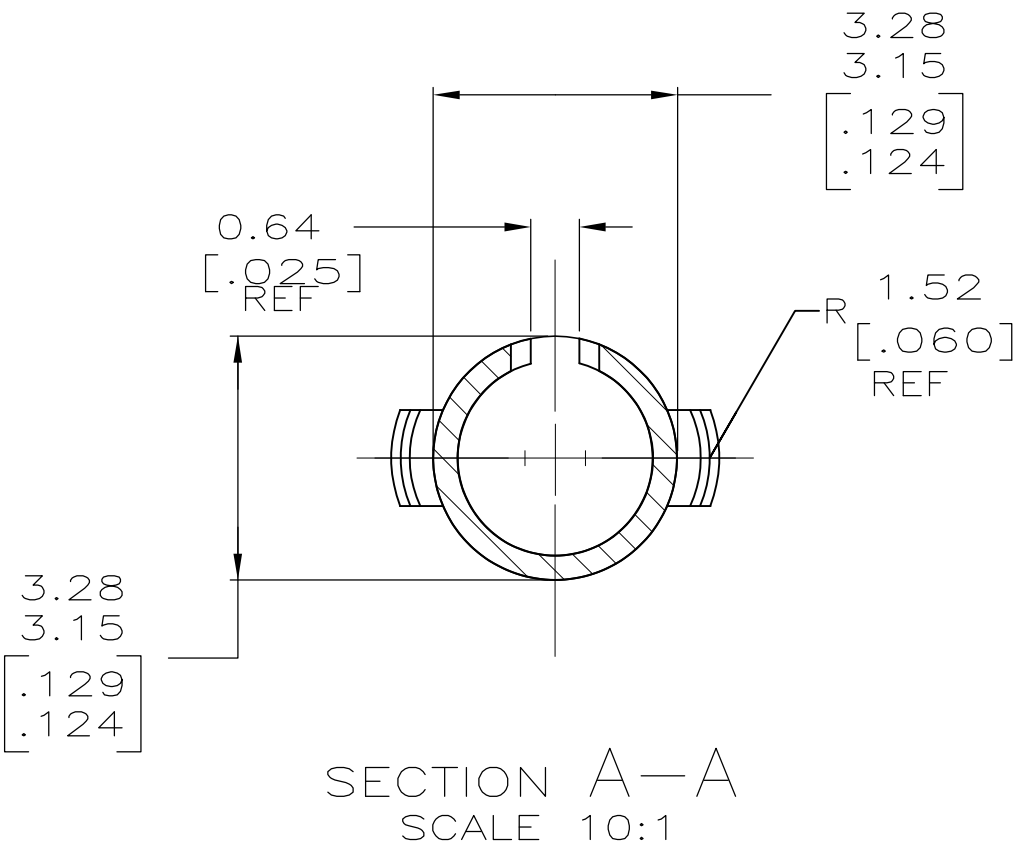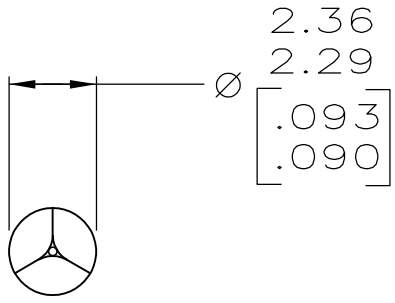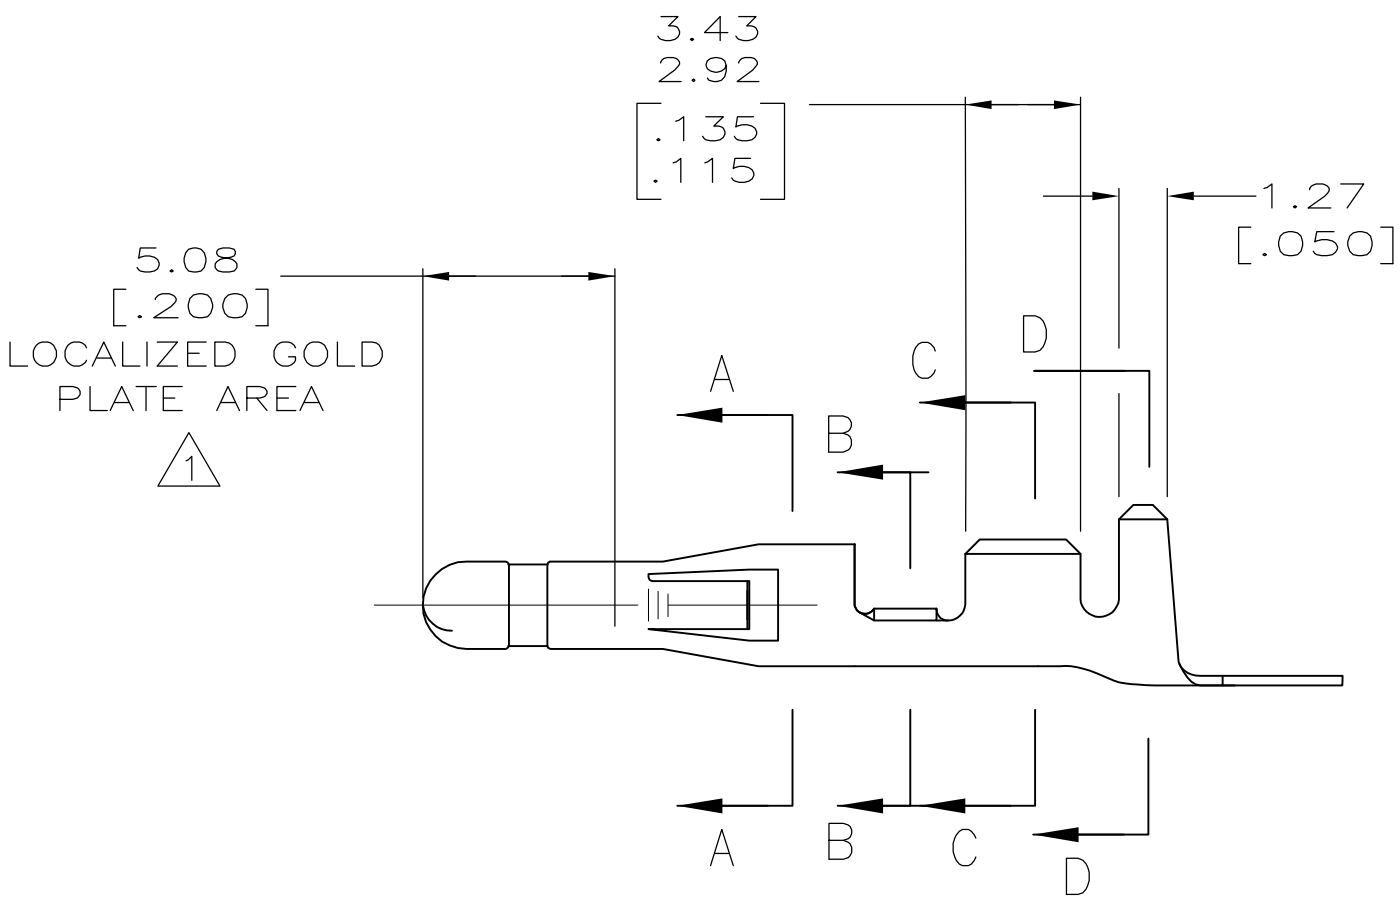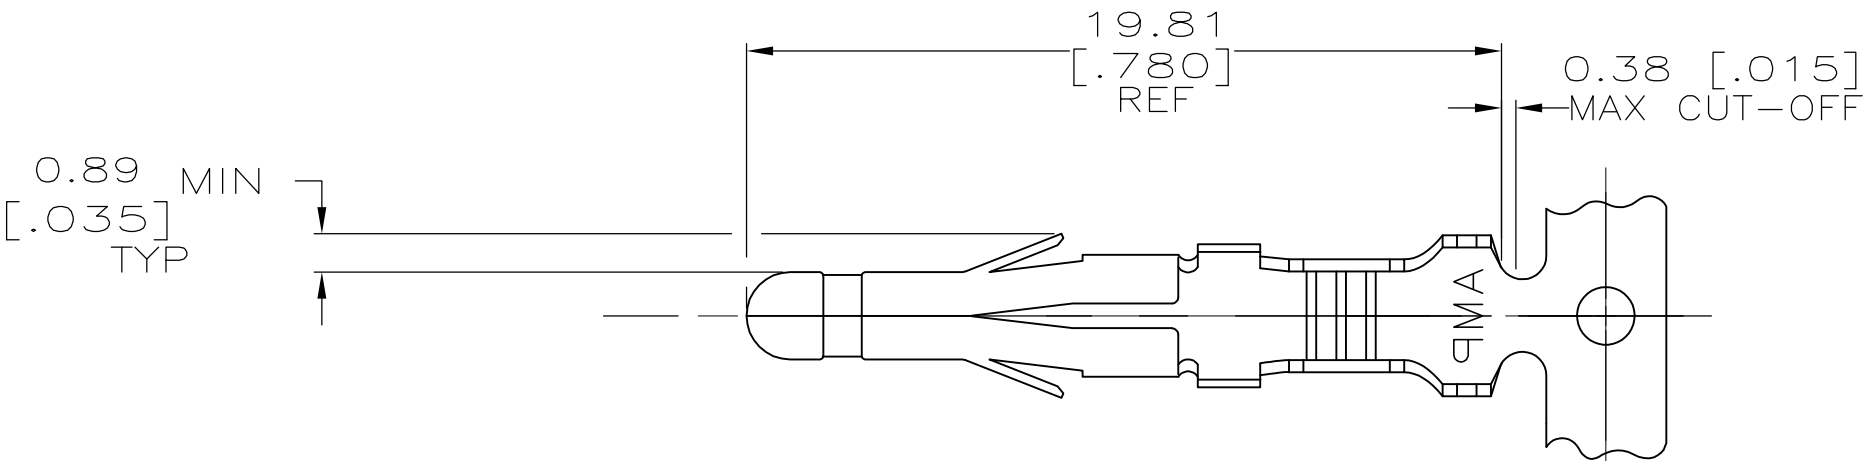

METRIC

⚠	0.25 [.010] BRASS	350416-5
PRE-TIN	0.25 [.010] BRASS	350416-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. SMITH 2-11-93	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK R. SWING 2-11-93			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C. CASH 2-11-93	NAME		
		PRODUCT SPEC	.093 PIN		
		APPLICATION SPEC	COMMERCIAL PIN AND SOCKET		
		WEIGHT	RESTRICTED TO		
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	A100779C=350416		
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	REV AF2	