
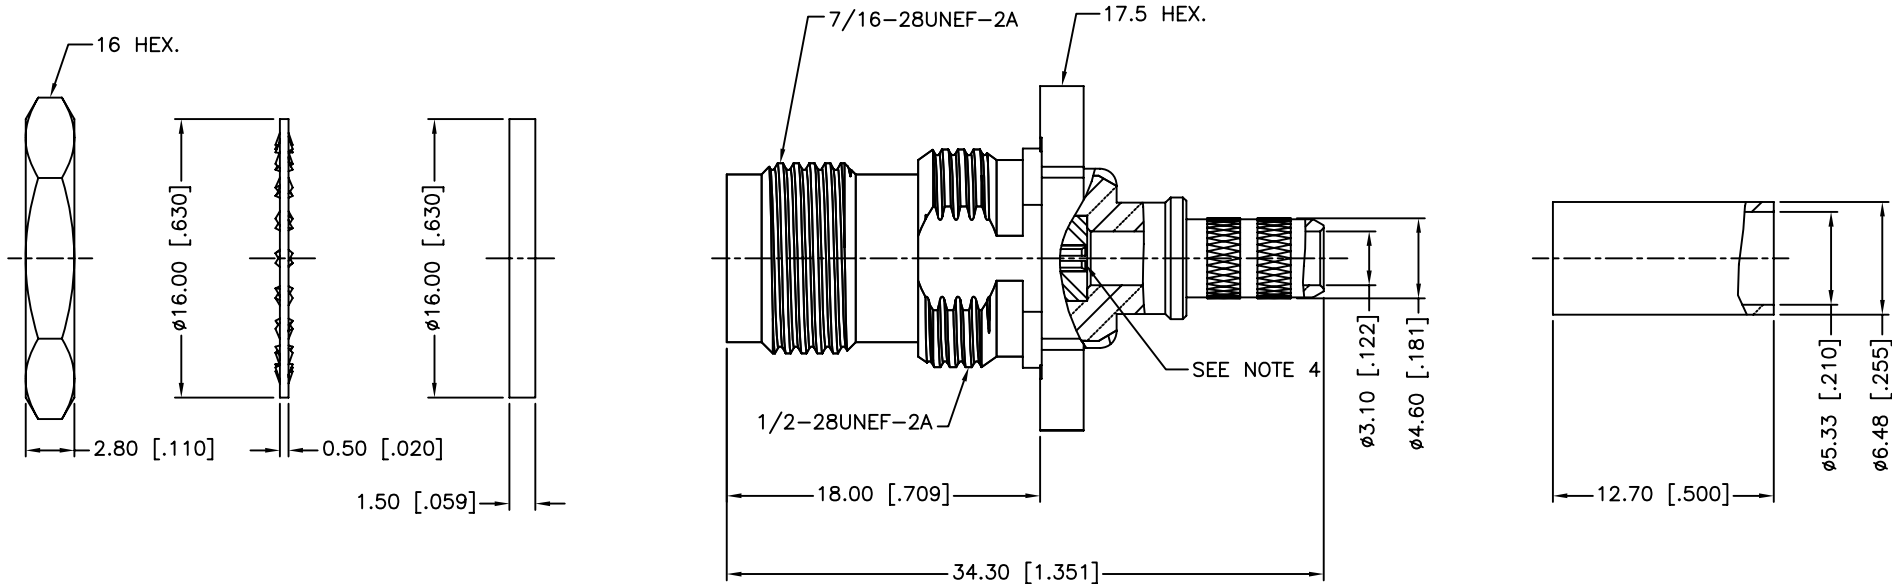
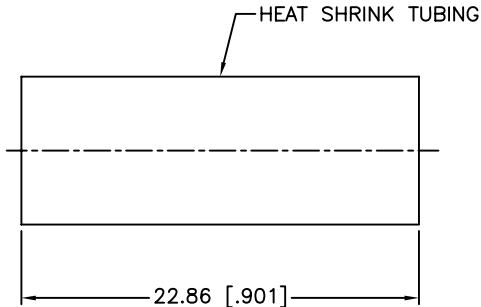


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/08/09	XXXXXX	INITIAL RELEASE

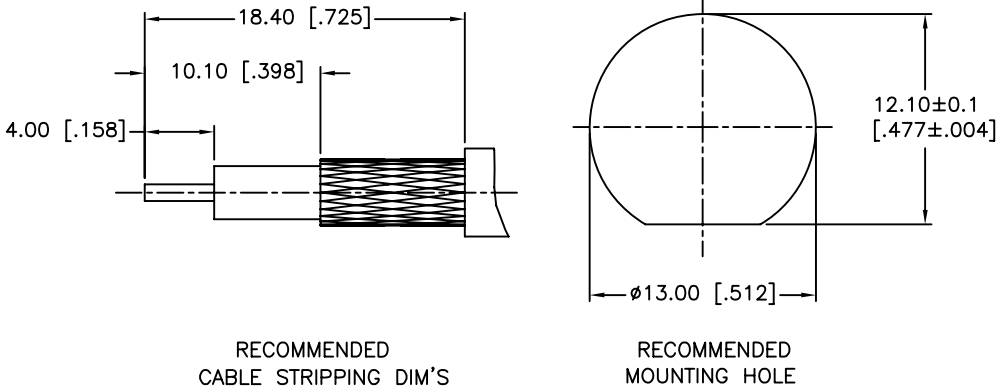

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. MAX. PANEL THICKNESS=3.5 mm
3. IP-67 COMPLIANT
4. CENTER CONTACT TO ACCEPT $\varnothing$.033" TO $\varnothing$.041" PIN [$\varnothing$ 0.85 mm TO $\varnothing$ 1.05 mm]

12	HEAT SHRINK TUBING		WHITE	1
11	HUT HEX	BRASS	NICKEL	1
10	LOCK WASHER	BRASS	NICKEL	1
9	GASKET	RUBBER	RED	1
8	FERRULE	COPPER	NICKEL	1
7	BARREL	BRASS	NICKEL	1
6	GASKET	SILICONE	RED	1
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
4	O-RING	SILICONE	RED	1
3	LOCK RING	BRASS	NICKEL	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm $\pm$ 0.20mm 8 - 30mm $\pm$ 0.40mm 30 - 120mm $\pm$ 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = $\pm$ 0.007" .315 - 1.180 = $\pm$ 0.015" 1.180 - 4.724 = $\pm$ 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	12/08/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/122160-11.DWG	

Amphenol Connex			
PART DESCRIPTION			
TNC BULKHEAD CRIMP JACK, IP-67 COMPLIANT (FOR RG-58C/U CABLE)			
PART NO.			
122160-11			
DWG. NO.	122160-11.DWG	REV.	NC
SIZE	A	SCALE	NA