


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

04

BS,A , 201052,004

REV.	DATE	DESCRIPTION	BY	C'K'D'
01	07-09-90	DRAWING ADJUSTED	J.V.B.	
02	03-09-92	CAVITY DIAMETER ENLARGED	Y.D.	
03	07-11-95	B.E.C. 9.3289	K.N.	
04	10-03-99	Temperature range -55C instead of -25C	K.N.	

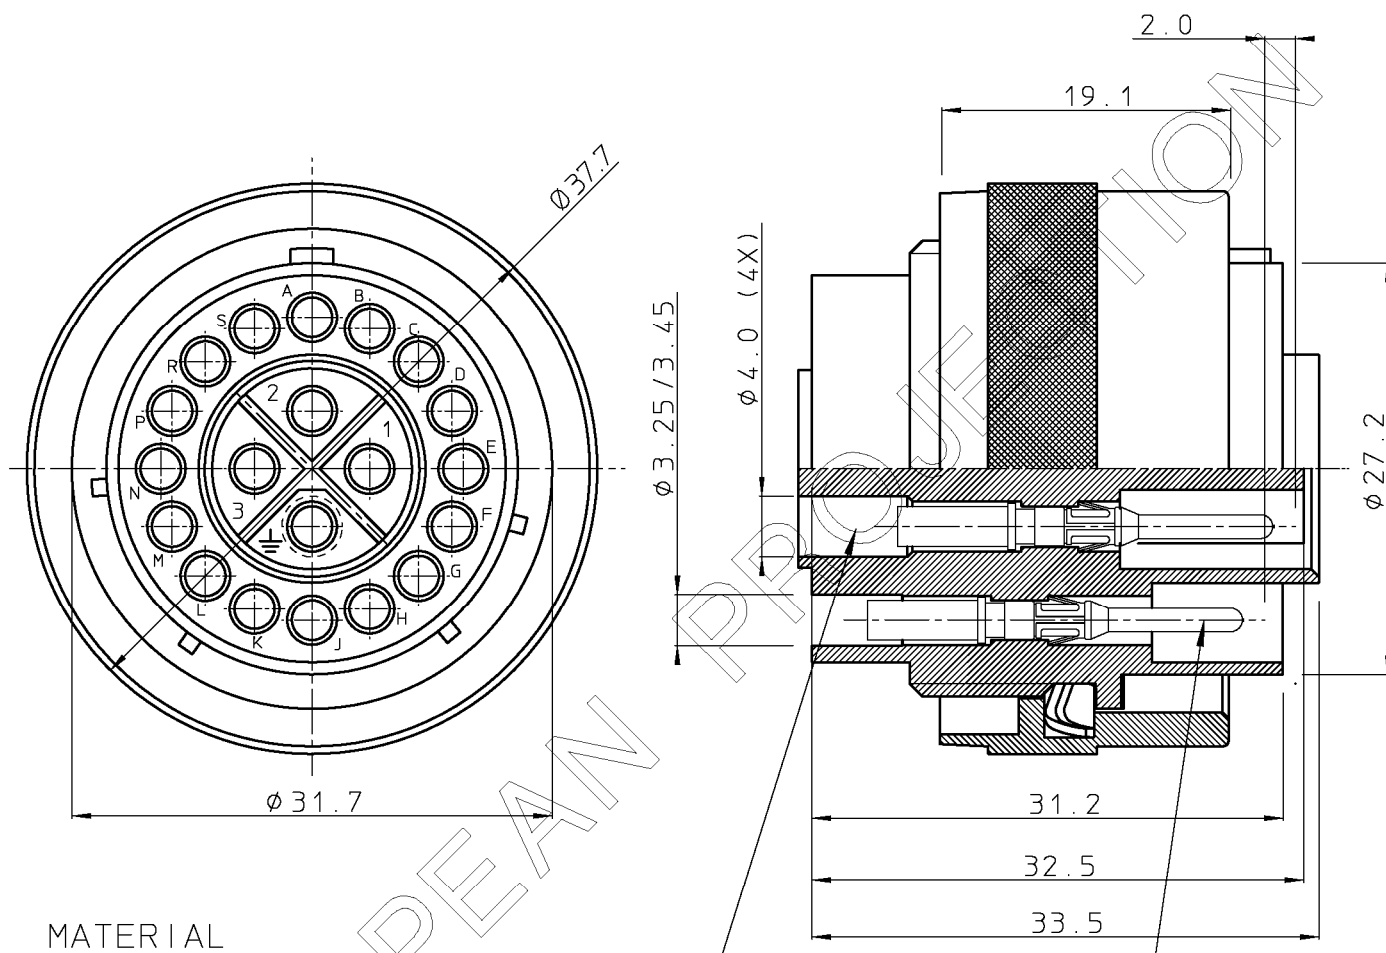

MATERIAL

- BODY : GLASS-FILLED POLYESTER UL94-V0. FM/LB POSITION COLOUR : BLACK.
- BAYONET COUPLING RING : HIGH STRENGTH CuZn ALLOY,NICKEL PLATED.


NOTE 2

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -55 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 MΩ MIN.
- TEST POTENTIAL : 2000 V EFF.
- 4 CONTACTS PER VDE 0110 CLASS 3-380V CLASS 2-600V

NOTES

- 1 CONNECTOR ACCEPTS # 16 STRIP FORMED, MACHINED AND SUBMINIATURE COAXIAL PIN AND SOCKET CONTACTS.
- 2 CONTACTS TO BE ORDERED SEPARATELY : REFER TO TRIM-TRIO CATALOG.

GEN. ST.		01		02		03		04		05		06		07		08		0D		50		60		70		80		90																																			
INT. ST.		10		11		12		13		14		18		20		31		32		33		34		38		39		40		42		43		44		45		46		48		56		70		72		73		75		76		81		82		83		84		88	
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN				APPR.				DATE				SIGN.				MALE PLUG METALOK BANTAM 20 POS.																																															
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.				DRAFT				23-11-89				M.BUEDS				CAT. No. UTG62020PN																																															
				CHECKED																																																											
ALL DIMENSIONS IN MM 				PROD. MGR.												 SOURIAU Connection Technology SOURIAU Route Nationale 23 72470 CHAMPAGNE SCALE																																															
				PR.ENG.MGR.																																																											
				PR.MGT.MGR.																																																											
ALLE AFMETINGEN IN MM				REFERENCES / REFERENTIES																																																											
				BS,A , 201052,004 04 NOT EXPORT CONTROLLED																																																											
				DRAWING NR.								CUSTOMER DRAWING								REVISTION																																											