


MATERIALS AND FINISHES

SMP JACK: (73406-6830)
SEE SD-73406-683

CABLE:
TEMP-FLEX 086-2201

LABEL:
BRADY PERMASLEEVE

SHRINK TUBE:
VERSAFIT OR EQUIVALENT

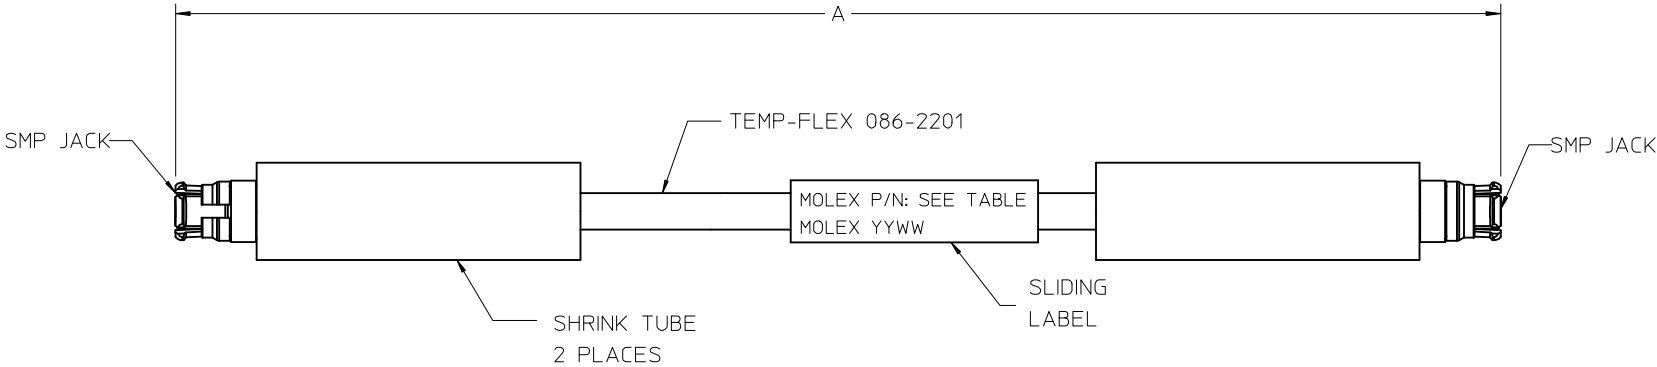

89762-1423	120.0	3048	13.5
89762-1422	12.00	304.8	1.80
89762-1421	9.00	228.6	1.50
89762-1420	6.00	152.4	1.15
PART NO.	IN	MM	MAX INSERTION LOSS TO 40 GHz (dB)
	A		

MAX VSWR 1.70 @ 40 GHz

CHG: UPDATE SMP EC NO: URF2015-0187 DRWN: BOMALLEY 2014/10/22 CHKD: AZR 2014/10/22 APPR: WSP INK 2014/10/23				QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				DESCRIPTION REV	▽=0 ▽=0 ▽=0	mm INCH		DRAWN BY DATE		CA SMP J X2 TF086-2201 EWR-5133, CA-SMP/SMP					
						4 PLACES ± --- ± ---	JLEE02 2013/03/28								
						3 PLACES ± --- ± ---	CHECKED BY DATE	molex							
						2 PLACES ± --- ± ---	SSS 2013/03/28								
						1 PLACE ± --- ± ---	APPROVED BY DATE	SD-89762-142							
						0 PLACE ± --- ± ---	JWIENER 2013/11/22								
						ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		1 OF 1					
						SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									